



# H134

## General Description

The H134 is a highly integrated solution for a constant voltage/constant current mode SMPS application.

The H134 contains one 1.21V voltage reference with  $\pm 0.5\%$  accuracy, one current sensing circuit and two operational amplifiers. Combining the voltage reference with one operational amplifier makes H134 an ideal voltage controller for use in adapters and battery chargers. The other low voltage reference combined with the other operational amplifier makes it an ideal current limiter for output low side current sensing.

The H134 is available in SOT-23-6L( TSOP-6 ) package.




## Features

- Constant Voltage and Constant Current Control
- Precision Internal Voltage Reference
- Few External Components
- Easy Compensation
- Low Supply Current
- Operating Temperature Range: -40 to 105°C

## Applications


- Adapters
- Battery Chargers

## Pin Configuration

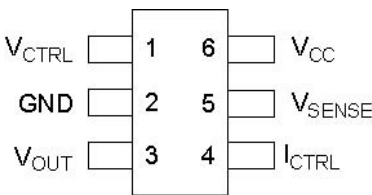	Pin Number	Pin Name	Function
	1	VCTRL	Input pin of the voltage control loop
	2	GND	Ground
	3	VOUT	Output pin. Sinking current only
	4	ICTRL	Input pin of the current control loop
	5	VSENSE	Input pin of the current control loop
	6	VCC	Power supply



### Functional Block Diagram

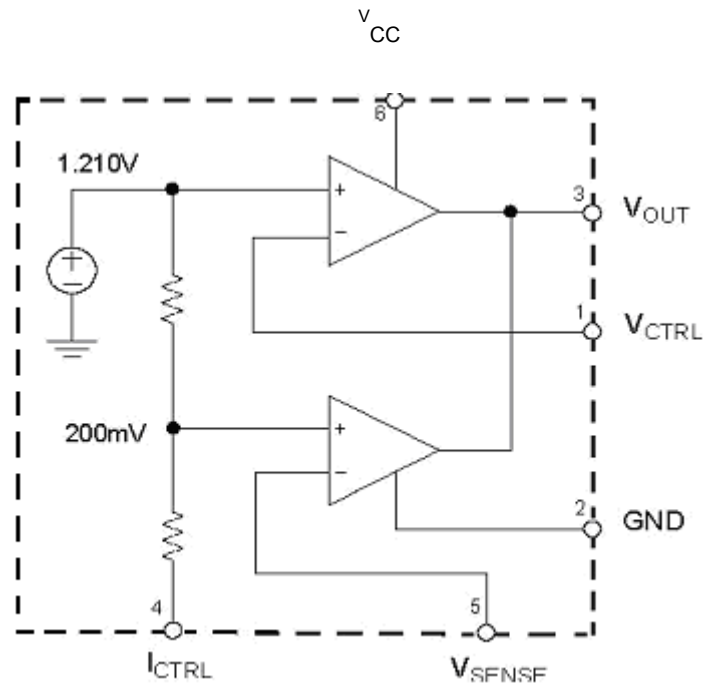

### Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Value	Unit
Power Supply Voltage	V <sub>CC</sub>	20	V
Input Voltage	V <sub>IN</sub>	-0.3 to V <sub>CC</sub>	V
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature	T <sub>STG</sub>	-65 to 150	°C
Package Thermal Resistance (Junction to Case)	R <sub>θJC</sub>	92	°C/W

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

### Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Power Supply Voltage	V <sub>CC</sub>	2.5	18	V
Operating Temperature Range	T <sub>A</sub>	-40	105	°C



### Electrical Characteristics

( $V_{CC}=5V$ ,  $T_A=25^{\circ}C$ , unless otherwise specified.)

Parameter	Symbol	Conditions		Min	Type	Max	Unit
TOTAL CURRENT CONSUMPTION							
Total Supply Current Not Including the Output Sinking Current	I <sub>CC</sub>	T <sub>A</sub> =25°C			0.9	1.3	mA
		-40°C <T <sub>A</sub> <105°C			1.0		
VOLTAGE CONTROL LOOP							
Transconductance Gain (V <sub>CTRL</sub> ). Sink Current Only	G <sub>mv</sub>	T <sub>A</sub> =25°C		1	3.5		mA/mV
		-40°C <T <sub>A</sub> < 105°C			2.5		
Voltage Control Loop Reference	V <sub>REF</sub>	T <sub>A</sub> =25°C	B Rank	1.200		1.204	V
			A Rank	1.205	1.21	1.215	
			C Rank	1.216		1.220	
		-40°C <T <sub>A</sub> < 105°C		1.186		1.234	
Input Bias Current (V <sub>CTRL</sub> )	I <sub>IBV</sub>	T <sub>A</sub> =25°C			50		nA
		-40°C <T <sub>A</sub> < 105°C			100		
CURRENT CONTROL LOOP							
Transconductance Gain (I <sub>CTRL</sub> ). Sink Current Only	G <sub>mi</sub>	T <sub>A</sub> =25°C		1.5	7		mA/mV
Current Control Loop Reference	V <sub>SENSE</sub>	I <sub>OUT</sub> =2.5mA, T <sub>A</sub> =25°C		194	198	203	mV
		I <sub>OUT</sub> =2.5mA, -40°C <T <sub>A</sub> < 105°C		192		208	
Current Out of Pin I <sub>CTRL</sub> at 200mV	I <sub>IBI</sub>	T <sub>A</sub> =25°C			25		μA
		-40°C <T <sub>A</sub> < 105°C			50		
OUTPUT STAGE							
Low Output Voltage at 10mA Sinking Current	V <sub>OL</sub>	T <sub>A</sub> =25°C			200		mV
Output Short Circuit Current. Output to V <sub>CC</sub> , Sink Current Only	I <sub>OS</sub>	T <sub>A</sub> =25°C			27	50	mA
		-40°C <T <sub>A</sub> < 105°C			35		



### Typical Performance Characteristics

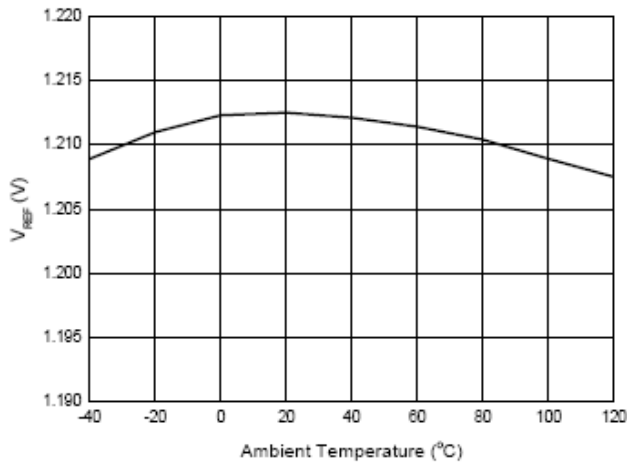


Figure 1.Vref VS. Ambient Temperature

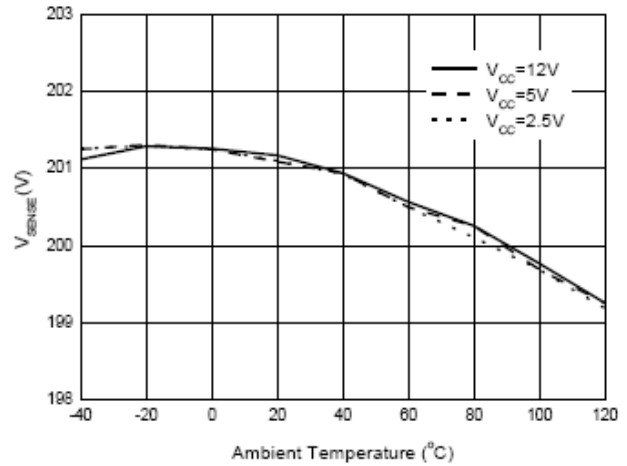


Figure 2.V<sub>SENSE</sub> VS. Ambient Temperature

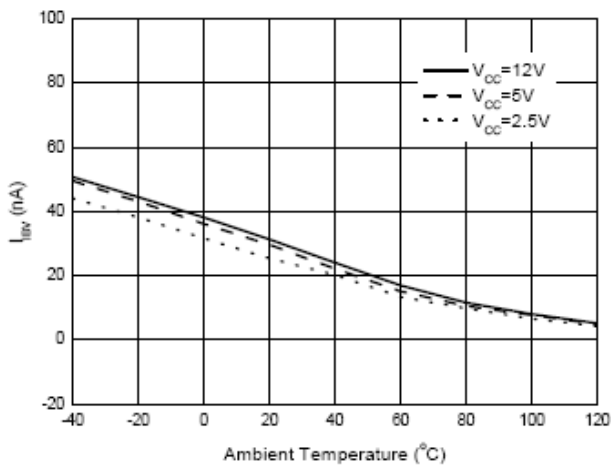


Figure 3.V<sub>CTRL</sub> Pin Input Bias Current VS. Ambient Temperature

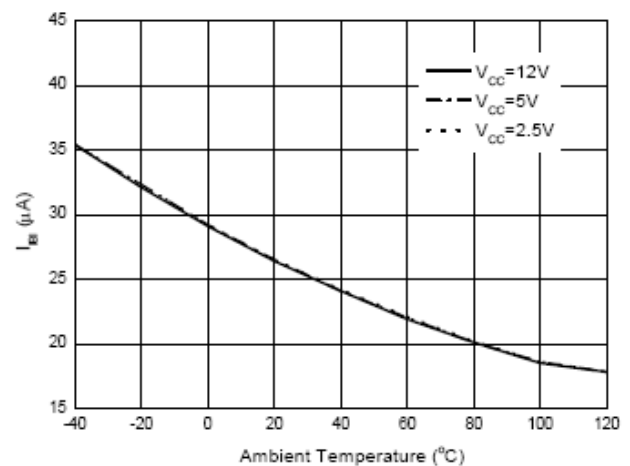


Figure 4.I<sub>CTRL</sub> Pin Input Bias Current VS. Ambient Temperature

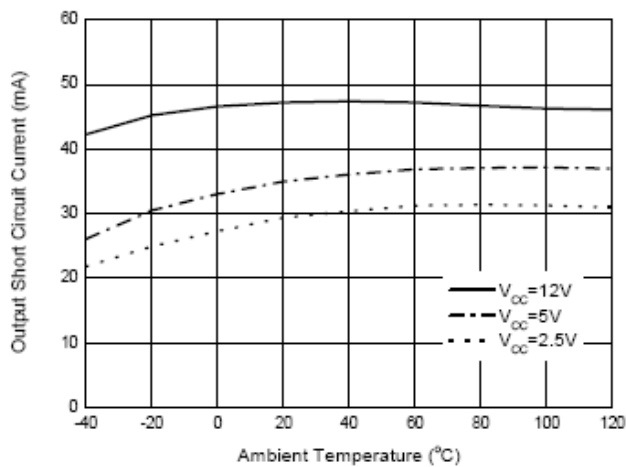


Figure 5.Output Short Circuit Current VS. Ambient Temperature

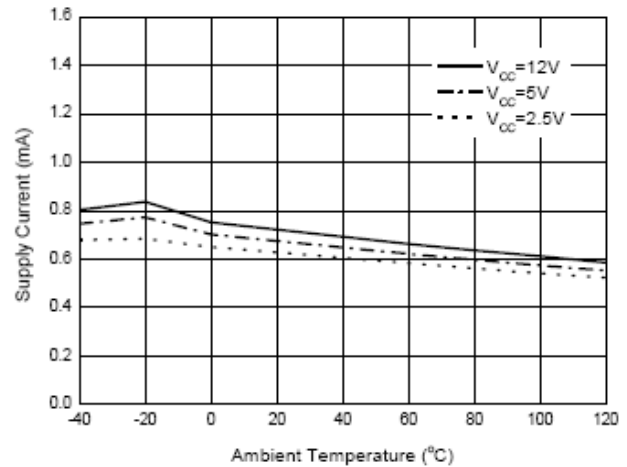



Figure 6.Supply Current VS. Ambient Temperature



Spec. No. : IC200401  
Issued Date : 2004.03.01  
Revised Date : 2009.08.12  
Page No. : 5/8



## Typical Application

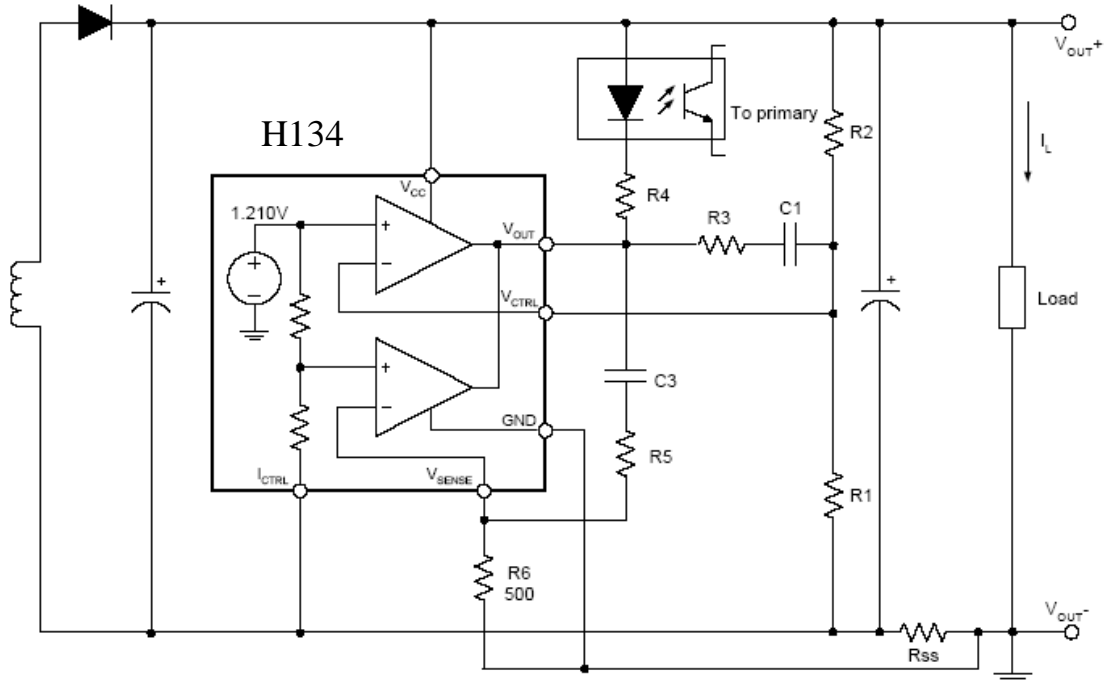


$$V_{OUT} = [V_{REF} + (I_L \times R_{SS})] \times \frac{R1 + R2}{R1} - (I_L \times R_{SS}) \quad (V)$$

$$CurrentLimit = \frac{V_{SENSE}}{R_{SS}} \quad (A)$$

Figure 8. Typical Application 2 of H134



## Typical Application

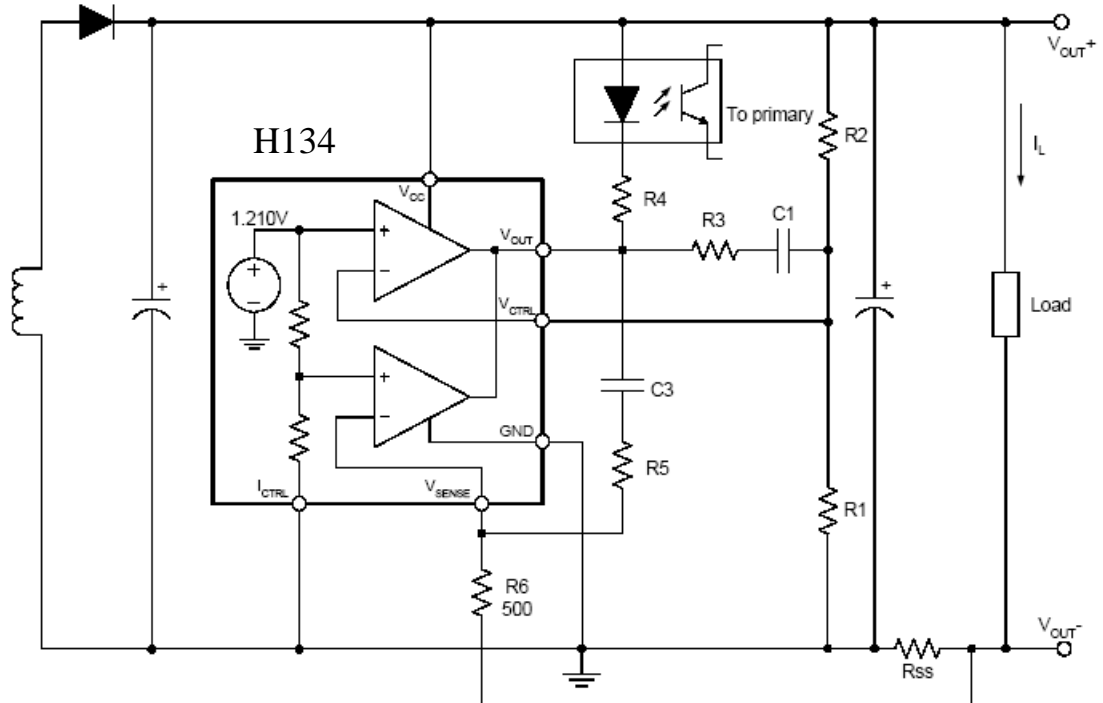


$$V_{OUT} = V_{REF} \times \frac{R1 + R2}{R1} - (I_L \times R_{SS}) \quad (V)$$

$$CurrentLimit = \frac{V_{SENSE} \times V_{REF}}{(V_{SENSE} + V_{REF}) \times R_{SS}} \quad (A)$$

Figure 9. Typical Application 3 of H134



### SOT-23-6L (TSOP-6) package dimension

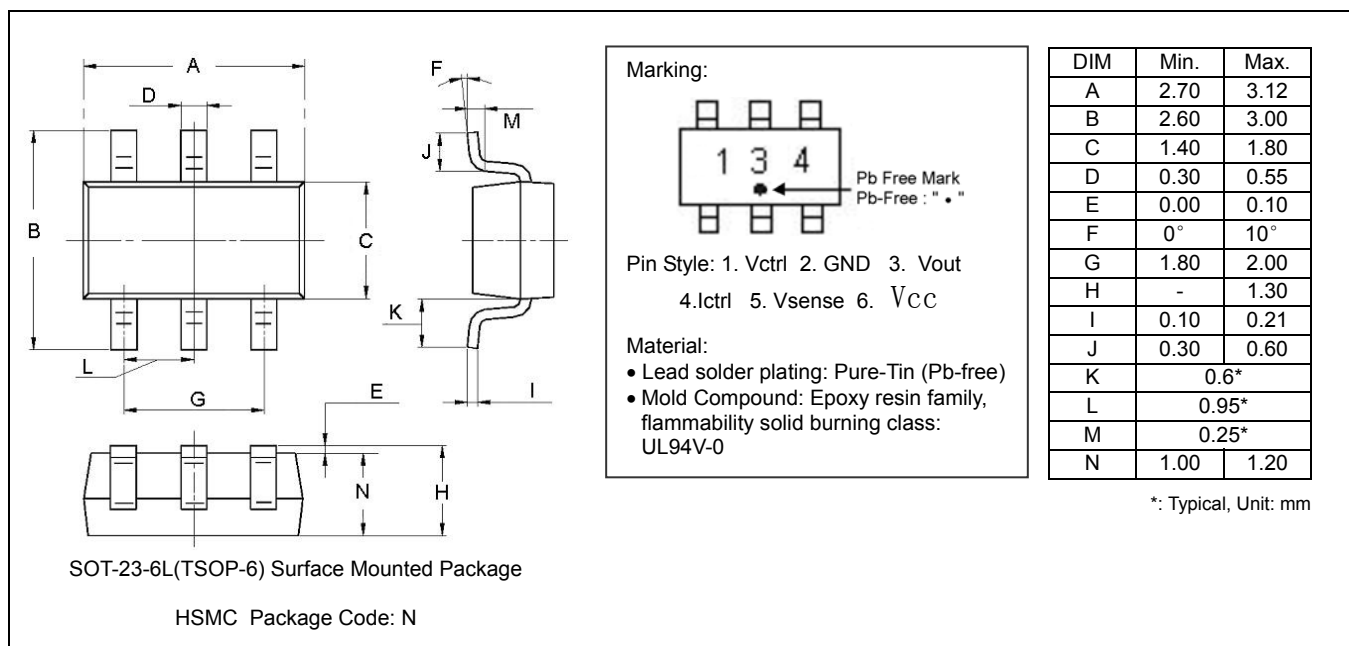

#### Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of AVANTIC.
- HSMC reserves the right to make changes to its products without notice.
- **HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMCS assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

#### Head Office And Factory:

- **Head Office** (Hi-Sincerity Microelectronics Corp.): 10F., No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.  
Tel: 886-2-25212056 Fax: 886-2-25632712, 25368454
- **AVANTICS Microelectronics Corp.**: No. 255, Cai Lun Rd. Zhangjiang Technology Industrial Park Pudong, Shanghai, China  
Tel: 86-021-61637118 Fax: 86-021-58558038