

# 2MBI1800XXG170-50

IGBT Modules

**Power Module (X series)**  
**1700V / 1800A / 2-in-1 package**

## ■ Features


- Low  $V_{CE(sat)}$
- Low Inductance Module structure

## ■ Applications


- Inverter for Motor Drives, AC and DC Servo Drives
- Uninterruptible Power Supply Systems, Wind Turbines, PV Power Conditioning Systems



## ■ Outline drawing ( Unit : mm )

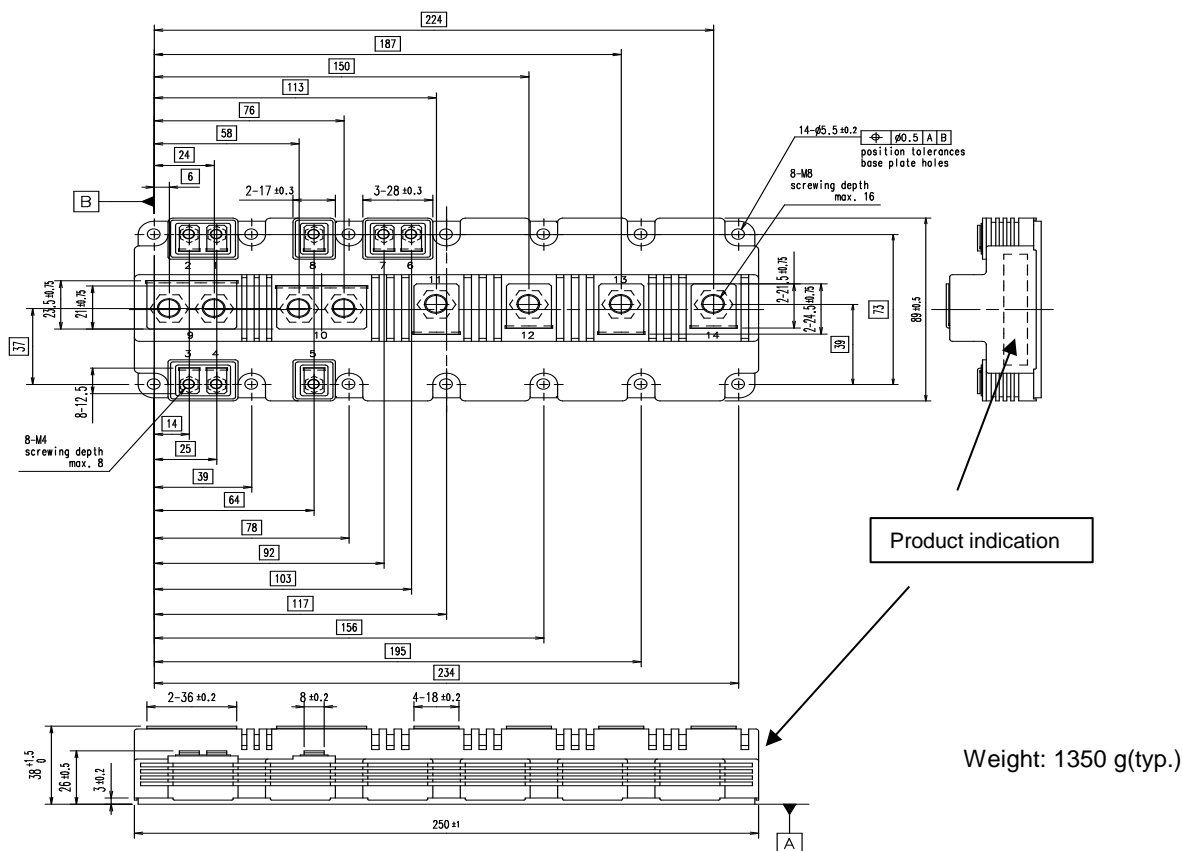

## ■ Equivalent Circuit

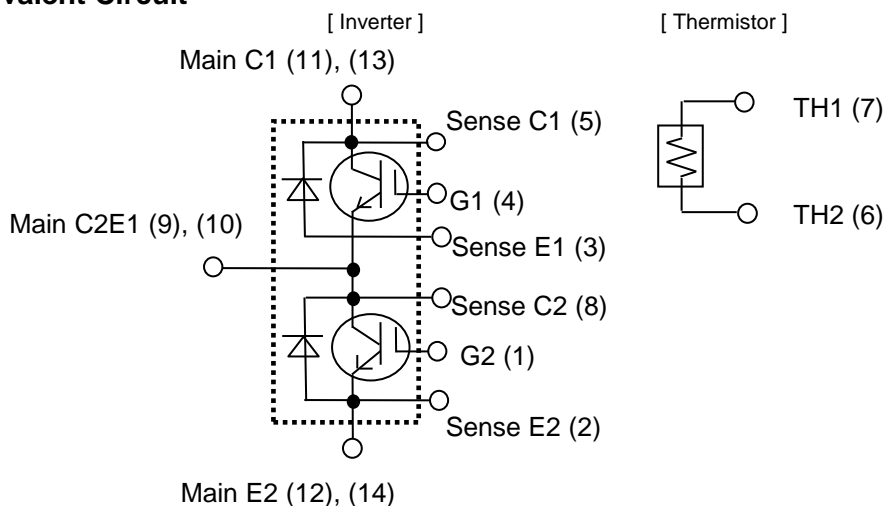

# 2MBI1800XXG170-50

**IGBT Modules**

## ■ Absolute Maximum Ratings (at $T_c = 25^\circ\text{C}$ unless otherwise specified)

Items			Symbols	Conditions	Maximum Ratings	Units	
Inverter	Collector-emitter voltage, gate-emitter short-circuited		$V_{CES}$	1700		V	
	Gate-emitter voltage, collector-emitter short-circuited		$V_{GES}$	±20		V	
	Collector-emitter voltage, gate-emitter short-circuited		$I_C$	Continuous	$T_C=100^{\circ}\text{C}$	1800	A
	Repetitive peak collector current		$I_{CRM}$	1ms		3600	
	Forward current		$I_F$			1800	
	Repetitive peak forward current		$I_{FRM}$	1ms		3600	
	Total power dissipation		$P_{tot}$	1 device		13	W
	Virtual junction temperature		$T_{vj}$			175	$^{\circ}\text{C}$
	Operating virtual junction temperature (under switching conditions)		$T_{vjop}$			175	
	Case temperature		$T_c$			150	
Storage temperature		$T_{stg}$			-40 ~ 150		
Isolation voltage	between terminals and copper base (*1)		$V_{isol}$	AC: 1min.		4000	Vrms
	between thermistor and others (*2)						
Mounting torque of screws to heatsink (*3)			$M_s$	M5		6.0	N·m
Mounting torque of screws to main terminals (*3)			$M_t$	M8		10.0	
Mounting torque of screws to sense terminals (*3)				M4		2.1	

(\*1) All terminals should be connected together during the test.

(\*2) Two thermistor terminals should be connected together, other terminals should be connected together and shorted to base plate during the test.

(\*3) Recommendable Value:       : Mounting torque of screws to heatsink       3.0 ~ 6.0 N·m (M5)  
   : Mounting torque of screws to main terminals   8.0~ 10.0 N·m (M8)  
   : Mounting torque of screws to sense terminals 1.8~ 2.1 N·m (M4)

# 2MBI1800XXG170-50

IGBT Modules

## ■ Electrical characteristics (at $T_{vj}=25^{\circ}\text{C}$ unless otherwise specified)

Items		Symbols	Conditions		Characteristics			Units
					min.	typ.	max.	
Inverter	Collector-Emitter cut-off current, gate-emitter short-circuited	$I_{\text{CES}}$	$V_{\text{GE}} = 0\text{V}$ $V_{\text{CE}} = 1700\text{V}$		-	-	600	$\mu\text{A}$
	Gate-Emitter leakage current	$I_{\text{GES}}$	$V_{\text{CE}}\!=\!0\text{V}$ , $V_{\text{GE}}\!=\!\pm 20\text{V}$		-	-	1200	nA
	Gate-Emitter threshold voltage	$V_{\text{GE(th)}}$	$V_{\text{CE}} = 20\text{V}$ $I_{\text{C}} = 1800\text{mA}$		6.0	6.5	7.0	V
	Collector-Emitter saturation voltage	$V_{\text{CE(sat)}}$ (terminal)	$V_{\text{GE}} = 15\text{V}$ $I_{\text{C}} = 1800\text{A}$	$T_{\text{vj}}\!=\!25^{\circ}\text{C}$	-	1.75	2.20	V
		$V_{\text{CE(sat)}}$ (chip)		$T_{\text{vj}}\!=\!25^{\circ}\text{C}$	-	1.70	2.15	
				$T_{\text{vj}}\!=\!125^{\circ}\text{C}$	-	2.10	-	
				$T_{\text{vj}}\!=\!150^{\circ}\text{C}$	-	2.20	-	
				$T_{\text{vj}}\!=\!175^{\circ}\text{C}$	-	2.30	-	
	Internal gate resistance	$r_{\text{g}}$	-		-	2.08	-	$\Omega$
	Capacitance	$C_{\text{ies}}$	$V_{\text{CE}}\!=\!10\text{V}$ , $V_{\text{GE}}\!=\!0\text{V}$ , $f\!=\!1\text{MHz}$		-	280	-	nF
		$C_{\text{oes}}$			-	7.3	-	
		$C_{\text{res}}$			-	2.2	-	
	Gate charge	$Q_{\text{G}}$	$V_{\text{CC}} = 900\text{V}$ , $I_{\text{C}} = 1800\text{A}$ $V_{\text{GE}} = -15 \rightarrow +15\text{V}$		-	14.3	-	$\mu\text{C}$
	Forward voltage	$V_{\text{F}}$ (terminal)	$V_{\text{GE}} = 0\text{V}$ $I_{\text{F}} = 1800\text{A}$	$T_{\text{vj}}\!=\!25^{\circ}\text{C}$	-	1.80	2.25	V
		$V_{\text{F}}$ (chip)		$T_{\text{vj}}\!=\!25^{\circ}\text{C}$	-	1.75	2.20	
				$T_{\text{vj}}\!=\!125^{\circ}\text{C}$	-	1.90	-	
				$T_{\text{vj}}\!=\!150^{\circ}\text{C}$	-	1.90	-	
				$T_{\text{vj}}\!=\!175^{\circ}\text{C}$	-	1.95	-	
	Switching time (*1)	$t_{\text{d(on)}}$	$V_{\text{CC}} = 900\text{V}$ $I_{\text{C}}$ , $I_{\text{F}} = 1800\text{A}$ $V_{\text{GE}} = \pm 15\text{V}$ $R_{\text{G}} = +0.22/-0.68\Omega$ $L_{\text{S}} = 40\text{ nH}$	$T_{\text{vj}}\!=\!25^{\circ}\text{C}$	-	1.11	-	$\mu\text{s}$
$T_{\text{vj}}\!=\!125^{\circ}\text{C}$				-	1.09	-		
$T_{\text{vj}}\!=\!150^{\circ}\text{C}$				-	1.09	-		
$T_{\text{vj}}\!=\!175^{\circ}\text{C}$				-	1.09	-		
$t_{\text{r}}$		$T_{\text{vj}}\!=\!25^{\circ}\text{C}$		-	0.16	-		
		$T_{\text{vj}}\!=\!125^{\circ}\text{C}$		-	0.18	-		
		$T_{\text{vj}}\!=\!150^{\circ}\text{C}$		-	0.18	-		
		$T_{\text{vj}}\!=\!175^{\circ}\text{C}$		-	0.18	-		
$t_{\text{d(off)}}$		$T_{\text{vj}}\!=\!25^{\circ}\text{C}$		-	1.02	-		
		$T_{\text{vj}}\!=\!125^{\circ}\text{C}$		-	1.07	-		
		$T_{\text{vj}}\!=\!150^{\circ}\text{C}$		-	1.09	-		
		$T_{\text{vj}}\!=\!175^{\circ}\text{C}$		-	1.10	-		
$t_{\text{f}}$		$T_{\text{vj}}\!=\!25^{\circ}\text{C}$		-	0.20	-		
		$T_{\text{vj}}\!=\!125^{\circ}\text{C}$		-	0.44	-		
		$T_{\text{vj}}\!=\!150^{\circ}\text{C}$		-	0.50	-		
		$T_{\text{vj}}\!=\!175^{\circ}\text{C}$		-	0.56	-		
Reverse recovery time	$t_{\text{rr}}$	$T_{\text{vj}}\!=\!25^{\circ}\text{C}$	-	0.38	-			
		$T_{\text{vj}}\!=\!125^{\circ}\text{C}$	-	0.52	-			
		$T_{\text{vj}}\!=\!150^{\circ}\text{C}$	-	0.56	-			
		$T_{\text{vj}}\!=\!175^{\circ}\text{C}$	-	0.60	-			

(\*1) Turn on time ( $t_{on}$ ) =  $t_{d(on)} + t_r$ , Turn off time ( $t_{off}$ ) =  $t_{d(off)} + t_f$

# 2MBI1800XXG170-50

**IGBT Modules**

## ■ Electrical characteristics (at $T_{vj}=25^{\circ}\text{C}$ unless otherwise specified)

Items		Symbols	Conditions		Characteristics			Units
					min.	typ.	max.	
Inverter	Switching loss (per pulse)	$E_{\text{on}}$	$V_{\text{CC}} = 900\text{V}$ $I_{\text{C}}, I_{\text{F}} = 1800\text{A}$ $V_{\text{GE}} = \pm 15\text{V}$ $R_{\text{G}} = +0.22/-0.68\Omega$ $L_{\text{S}} = 40\text{ nH}$	$T_{\text{vj}}=25^{\circ}\text{C}$	-	424	-	mJ
				$T_{\text{vj}}=125^{\circ}\text{C}$	-	540	-	
				$T_{\text{vj}}=150^{\circ}\text{C}$	-	574	-	
				$T_{\text{vj}}=175^{\circ}\text{C}$	-	612	-	
		$E_{\text{off}}$		$T_{\text{vj}}=25^{\circ}\text{C}$	-	459	-	
				$T_{\text{vj}}=125^{\circ}\text{C}$	-	585	-	
				$T_{\text{vj}}=150^{\circ}\text{C}$	-	621	-	
				$T_{\text{vj}}=175^{\circ}\text{C}$	-	651	-	
		$E_{\text{rr}}$		$T_{\text{vj}}=25^{\circ}\text{C}$	-	284	-	
				$T_{\text{vj}}=125^{\circ}\text{C}$	-	410	-	
				$T_{\text{vj}}=150^{\circ}\text{C}$	-	464	-	
				$T_{\text{vj}}=175^{\circ}\text{C}$	-	517	-	
Thermistor	Resistance	$R$	$T =$	25°C	-	5000	-	Ω
			$T =$	100°C	465	495	520	
	B value	$B$	$T =$	25/ 50°C	3305	3375	3450	K

### NOTICE:

The external gate resistance ( $R_G$ ) shown above is one of our recommended value for the purpose of minimum switching loss. However the optimum  $R_G$  depends on circuit configuration and/or environment. We recommend that the  $R_G$  has to be carefully chosen based on consideration if IGBT module matches design criteria, for example, switching loss, EMC/EMI, spike voltage, surge current and no unexpected oscillation and so on.







## ■ Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	max.	
Thermal resistance (1 device)	$R_{th(j-c)}$	Inverter IGBT	-	-	11.5	K/kW
		Inverter FWD	-	-	22.0	
Thermal resistance (1 IGBT+1 FWD) (*1)	$R_{th(c-s)}$	with 1 W/(m·K) thermal grease	-	4.2	-	

(\*1) This is the value which is defined mounting on the additional heatsink with thermal grease.

# 2MBI1800XXG170-50

## IGBT Modules

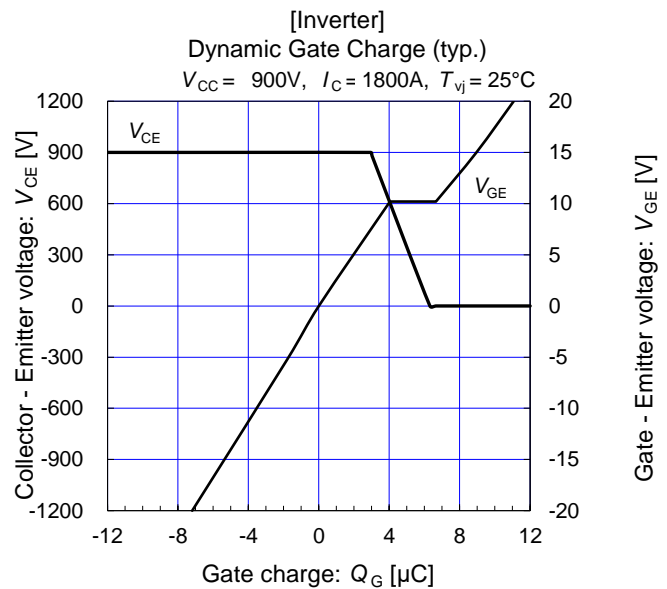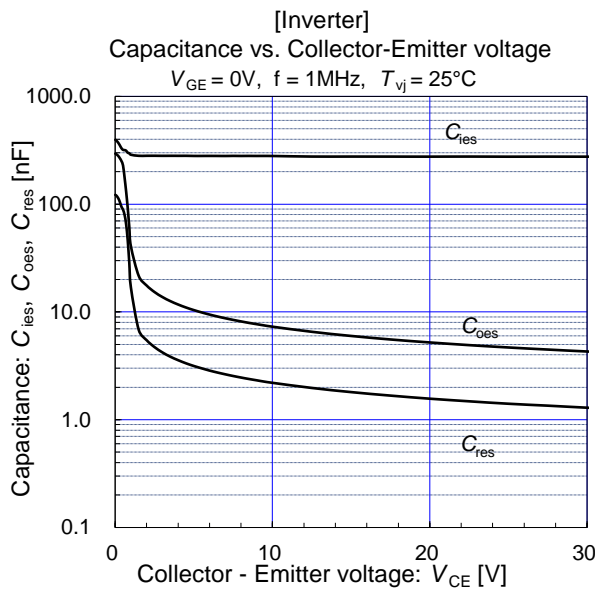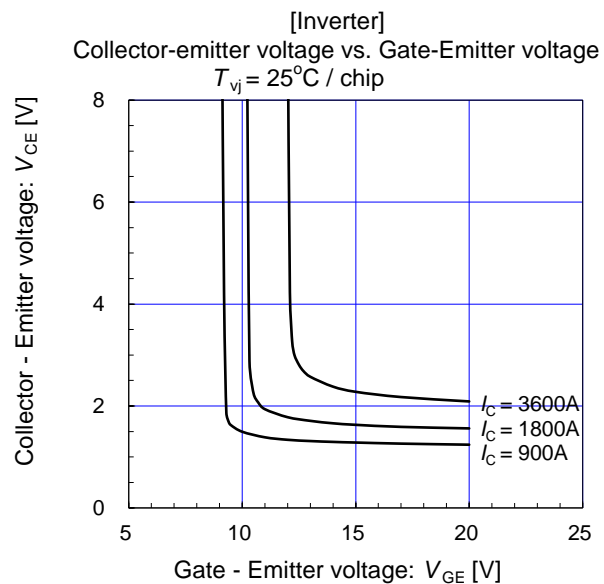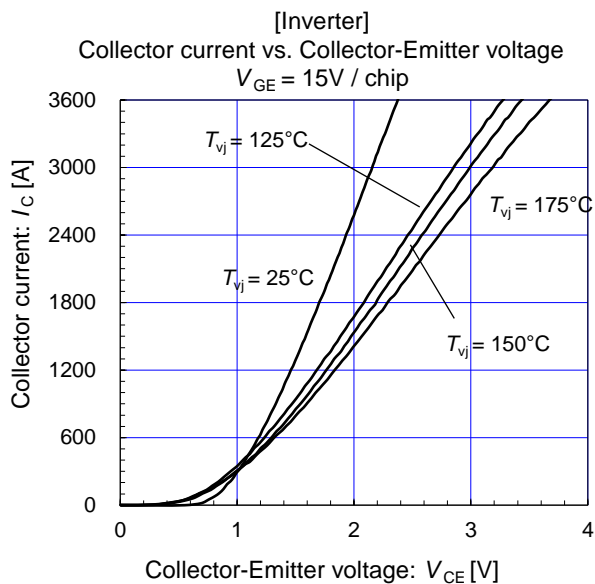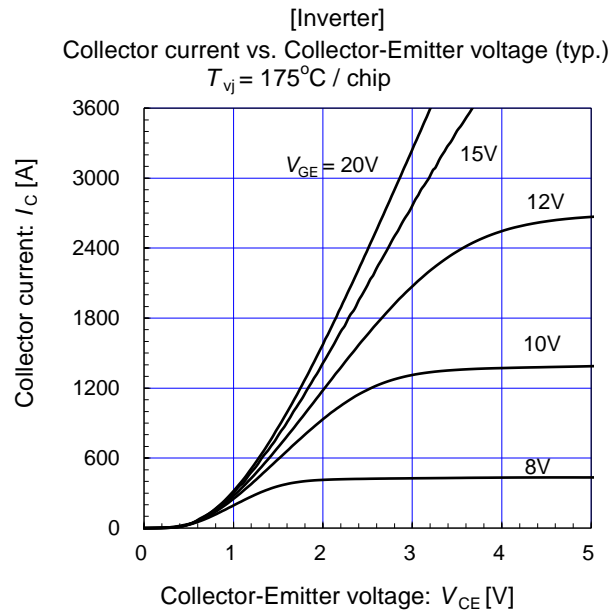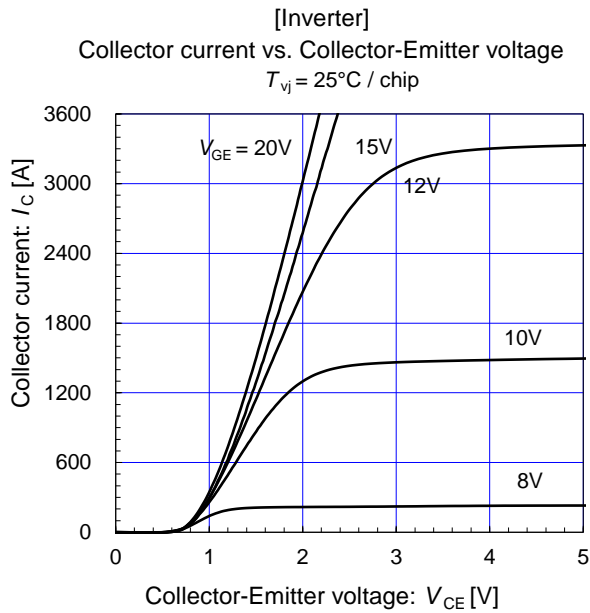


# 2MBI1800XXG170-50

IGBT Modules

[Inverter]

$E_{on}$  vs. Collector current (typ.)


$V_{CC} = 900V$ ,  $V_{GE} = \pm 15V$ ,  $R_G = +0.22/-0.68\Omega$

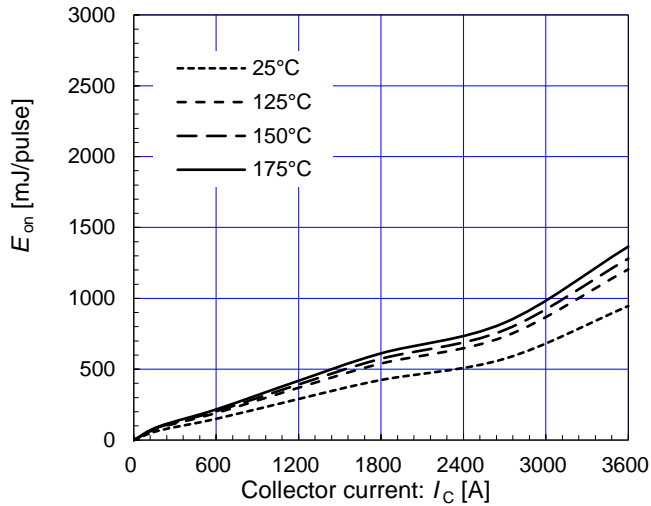

[Inverter]

$E_{on}$  vs. Gate resistance (typ.)


$V_{CC} = 900V$ ,  $V_{GE} = \pm 15V$ ,  $I_C = 1800A$

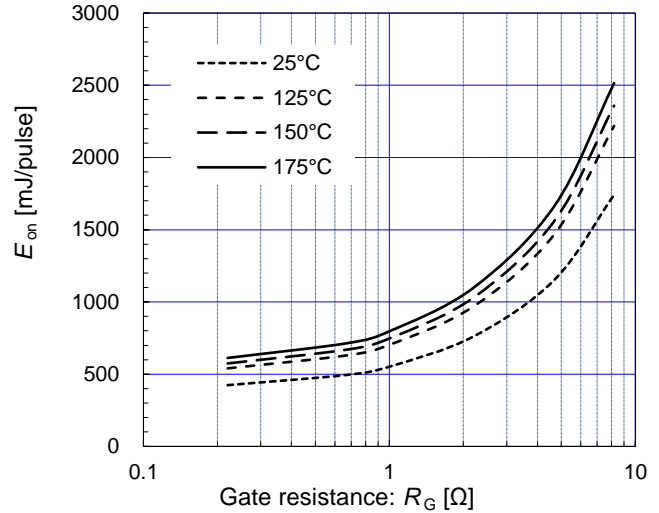

[Inverter]

$E_{off}$  vs. Collector current (typ.)


$V_{CC} = 900V$ ,  $V_{GE} = \pm 15V$ ,  $R_G = +0.22/-0.68\Omega$

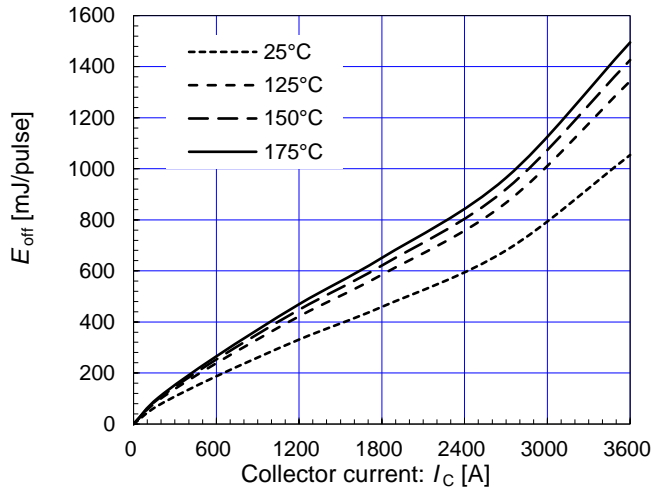

[Inverter]

$E_{off}$  vs. Gate resistance (typ.)


$V_{CC} = 900V$ ,  $V_{GE} = \pm 15V$ ,  $I_C = 1800A$

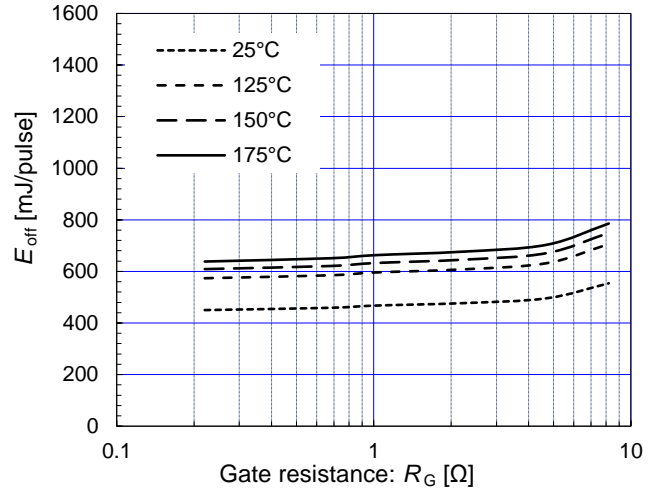

[Inverter]

$E_{rr}$  vs. Forward current (typ.)


$V_{CC} = 900V$ ,  $V_{GE} = \pm 15V$ ,  $R_G = +0.22/-0.68\Omega$

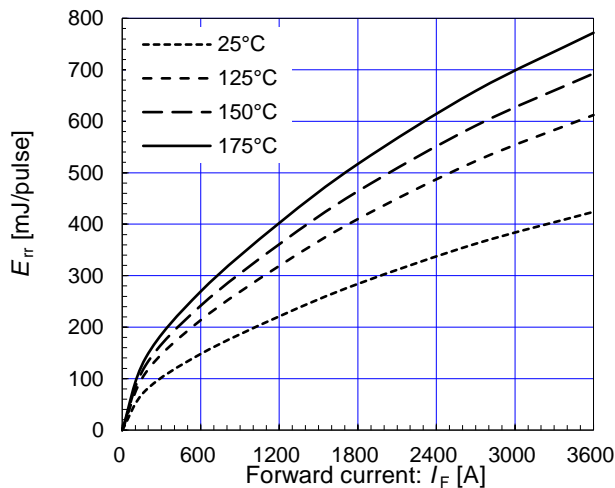

[Inverter]

$E_{rr}$  vs. Gate resistance (typ.)

$V_{CC} = 900V$ ,  $V_{GE} = \pm 15V$ ,  $I_F = 1800A$

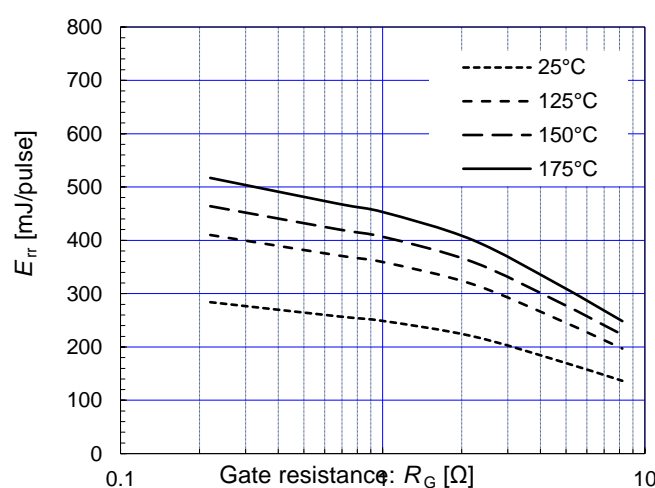


# 2MBI1800XXG170-50

IGBT Modules

[Inverter]

Switching time vs. Collector current (typ.)


$V_{CC} = 900V$ ,  $R_G = +0.22/-0.68\Omega$ ,  $V_{GE} = \pm 15V$ ,  $T_{vj} = 25^\circ C$

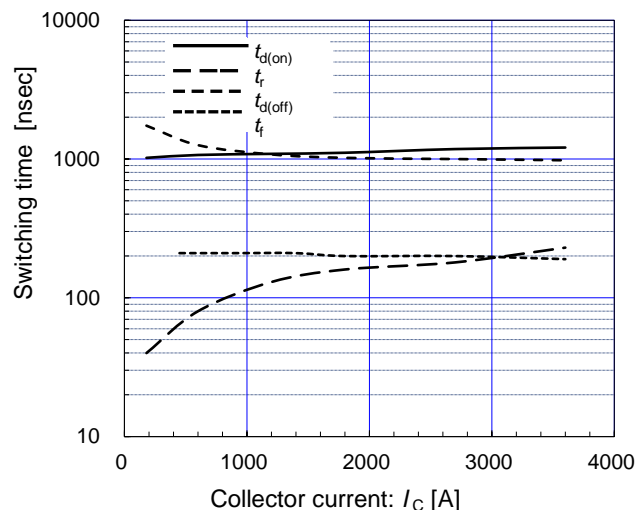

[Inverter]

Switching time vs. Gate resistance (typ.)


$V_{CC} = 900V$ ,  $I_C = 1800A$ ,  $V_{GE} = \pm 15V$ ,  $T_{vj} = 25^\circ C$

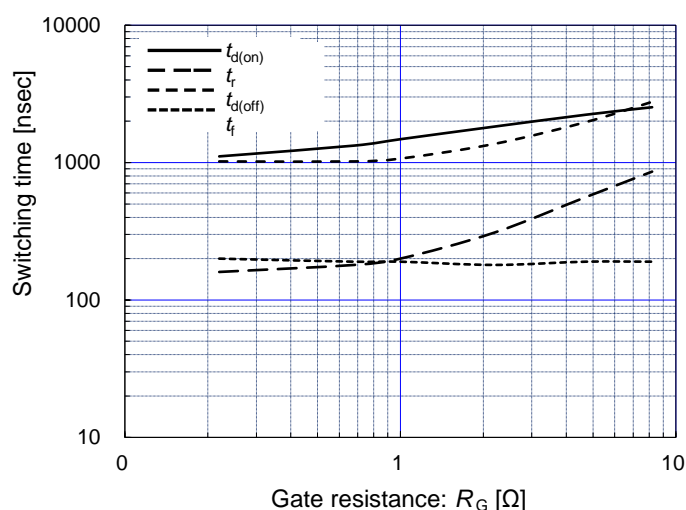

[Inverter]

Switching time vs. Collector current (typ.)


$V_{CC} = 900V$ ,  $R_G = +0.22/-0.68\Omega$ ,  $V_{GE} = \pm 15V$ ,  $T_{vj} = 175^\circ C$

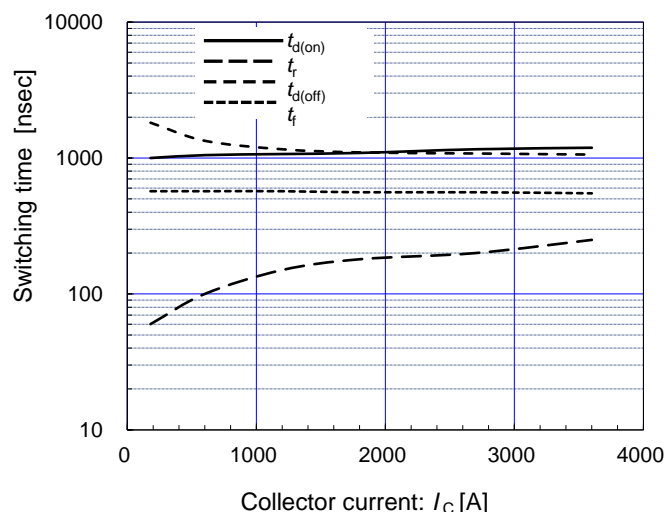

[Inverter]

Switching time vs. Gate resistance (typ.)


$V_{CC} = 900V$ ,  $I_C = 1800A$ ,  $V_{GE} = \pm 15V$ ,  $T_{vj} = 175^\circ C$

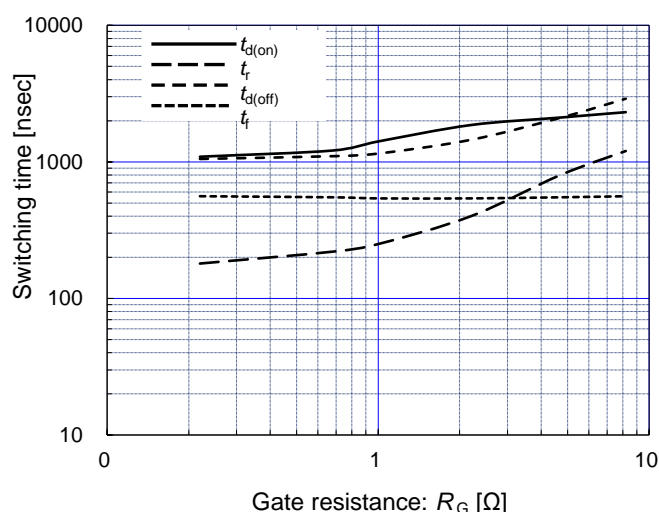

[Inverter]






Reverse bias safe operating area (max.)

$V_{GE} = \pm 15V$ ,  $R_G = +0.22/-0.68\Omega$ ,  $T_{vj} = 175^\circ C$

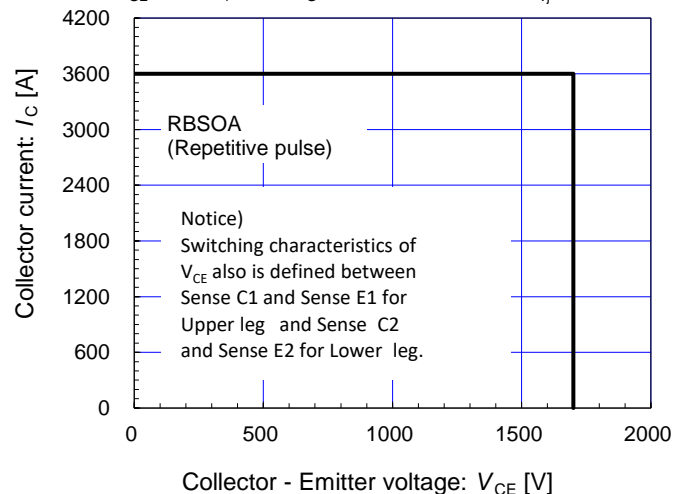

# 2MBI1800XXG170-50

IGBT Modules

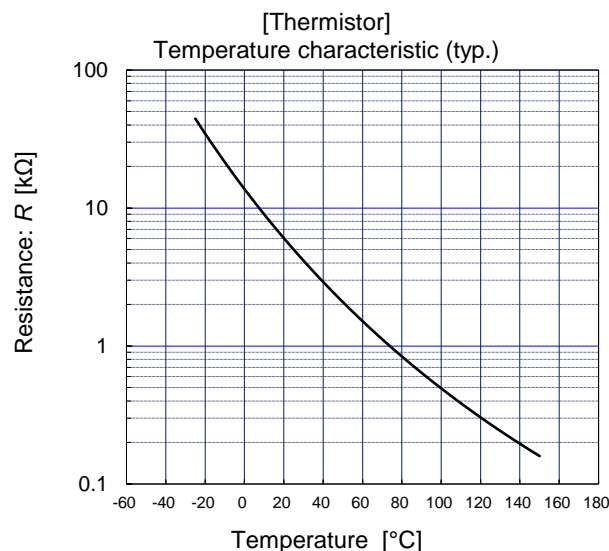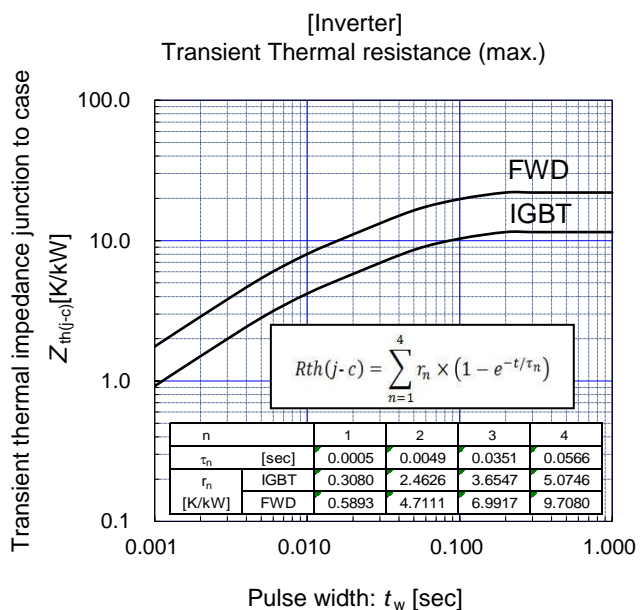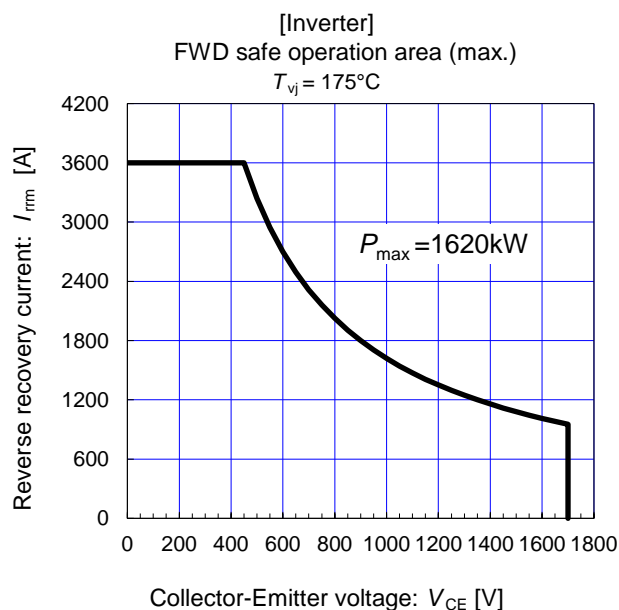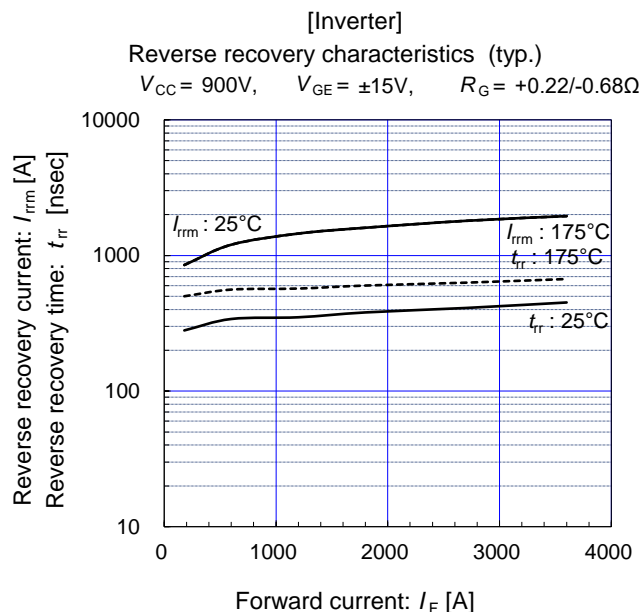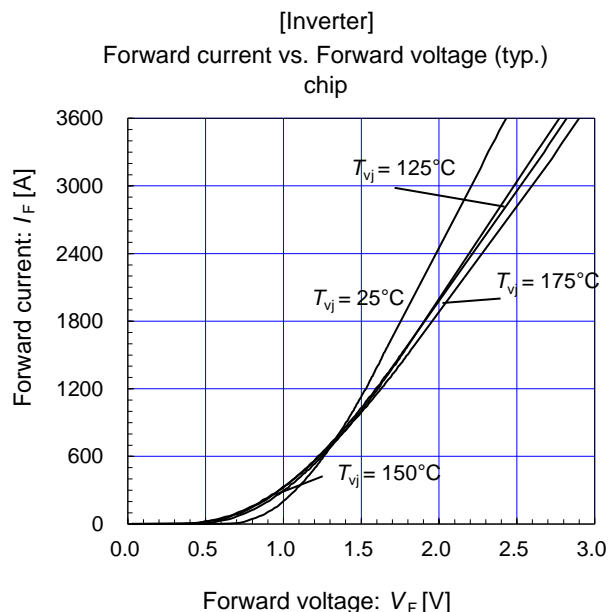



## Warnings

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of 7/2019. The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.
2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.
4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
  - Computers ·OA equipment ·Communications equipment (terminal devices) ·Measurement equipment
  - Machine tools ·Audiovisual equipment ·Electrical home appliances ·Personal equipment ·Industrial robots etc.
5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
  - Transportation equipment (mounted on cars and ships) ·Trunk communications equipment
  - Traffic-signal control equipment ·Gas leakage detectors with an auto-shut-off feature
  - Emergency equipment for responding to disasters and anti-burglary devices ·Safety devices ·Medical equipment
6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
  - Space equipment ·Aeronautic equipment ·Nuclear control equipment ·Submarine repeater equipment
7. Copyright (c)1996-2019 by Fuji Electric Co., Ltd. All rights reserved.  
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.
8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product. Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.