



## L11831A/B/C

CMOS IC

### MAXIMUM 3A, ULTRA LOW DROPOUT REGULATOR WITH ENABLE

#### DESCRIPTION

The UTC **L11831A/B/C** is a positive voltage regulator with high performance. It has low dropout voltage and low input voltage, besides its output voltage can be fixed at 1V, 1.05V, 1.2V, 1.5V, 1.8V, or 2.5V depending on internal feedback resistors or ADJ (not connected to the ground) with external feedback resistors. There are two additional pin in the UTC **L11831A/B/C**. One is EN pin and the other is POK pin.

The UTC **L11831A/B/C** is specially made for applications with low input voltage, low dropout voltage, and low output voltage which is almost the same as the input voltage. Typical applications include motherboards, notebooks, set top boxes, network cards and peripheral cards.

#### FEATURES


- \*  $V_{DD}$  voltage 5V
- \* Maximum 3A low-dropout voltage regulator
- \* High accuracy output voltage  $\pm 1.5\%$
- \* When disable  $V_O$  pull low resistance
- \* Internal over current and over temperature protection

#### ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
L11831XL-xx-SH2-R	L11831XG-xx-SH2-R	HSOP-8	Tape Reel
L11831XL-xx-K10-3030-R	L11831XG-xx-K10-3030-R	DFN3030-10	Tape Reel

Note: xx: Output Voltage, refer to Marking Information.



<p>L11831XG-xx-SH2-R</p> <p>(1) Packing Type (2) Package Type (3) Output Voltage Code (4) Green Package (5) EN Pin Function</p>	<p>(1) R: Tape Reel (2) SH2: HSOP-8, K10-3030: DFN3030-10 (3) xx: Refer to Marking Information (4) G: Halogen Free and Lead Free, L: Lead Free (5) A: Internal Pull High, B: Internal Pull Low C: Internal Pull Low, soft-start time</p>
---	--

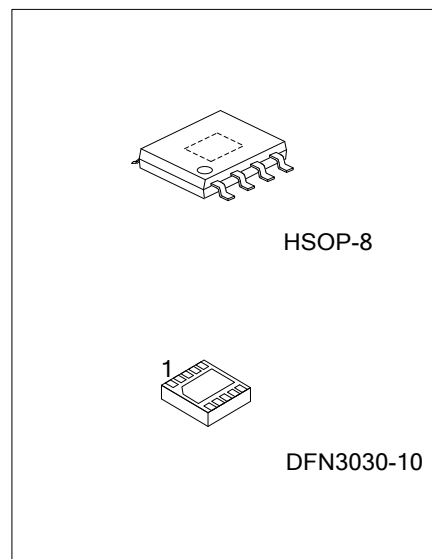

## MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
HSOP-8	12: 1.2v 15: 1.5V 18: 1.8V 25: 2.5V AD: ADJ	<p>A: Internal Pull High B: Internal Pull Low C: Internal Pull Low, soft-start time</p> <p>UTC L11831 Date Code L: Lead Free G: Halogen Free</p>
DFN3030-10		<p>Voltage Code L 11831 Date Code</p> <p>A: Internal Pull High B: Internal Pull Low C: Internal Pull Low, soft-start time</p>


## PIN CONFIGURATION

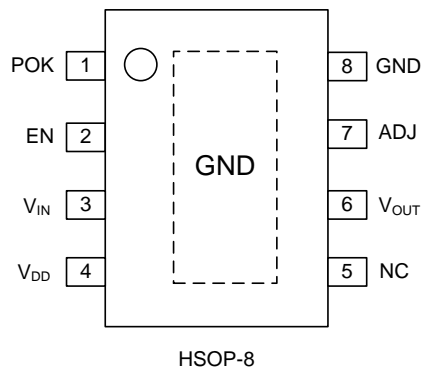

## PIN DESCRIPTION

PIN NO.		PIN NAME	DESCRIPTION
HSOP-8	DFN3030-10		
1	5	POK	This pin will indicate high under this situation: $V_O$ reaches 90% of its rating voltage. Open-drain output.
2	6	EN	Chip enable (active-high)
3	7 ~ 9	$V_{IN}$	The pin of input voltage.
4	10	$V_{DD}$	This pin is for input voltage to control circuit.
5	-	NC	No internal connection
6	1 ~ 3	$V_{OUT}$	Output voltage
7	4	ADJ	When this pin connected to the ground, $V_{OUT}$ will be set by the internal feedback resistors. Otherwise, if using external feedback resistors to decide the $V_{OUT}$ , $V_{OUT} = 0.8(R1+R2)/R2$ Volts.
8	11	GND	Ground.

## ■ BLOCK DIAGRAM

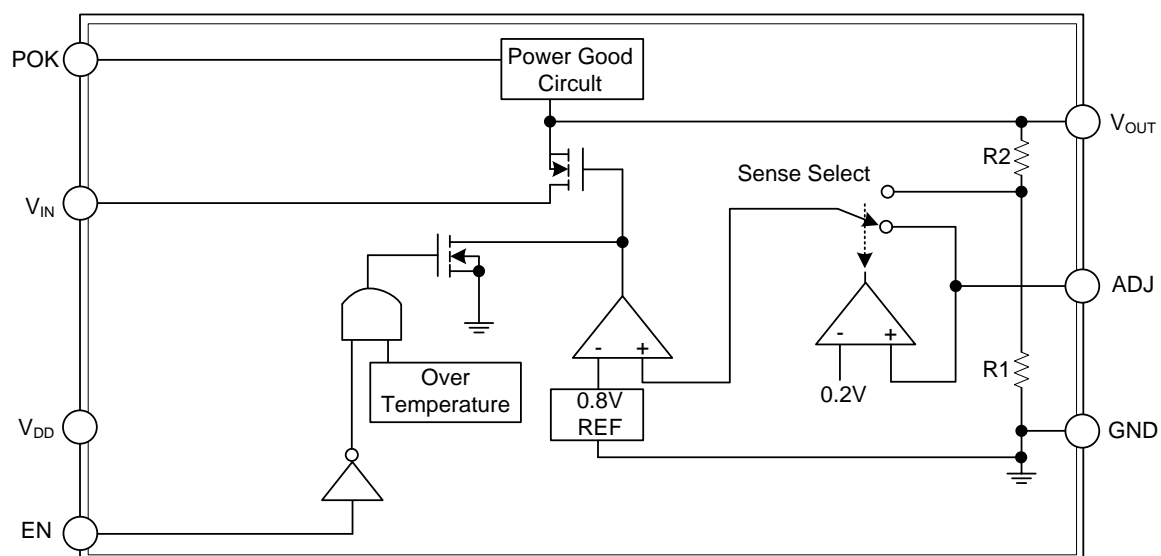

## ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	$V_{DD}, V_{IN}$	6	V
Power Dissipation	$P_D$	Internally limited	
Junction Temperature	$T_J$	150	°C
Operation Temperature	$T_{OPR}$	-40 ~ +85	°C
Storage Temperature	$T_{STG}$	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.  
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

## ■ RECOMMENDED OPERATING CONDITIONS (Note 1)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{IN}$	2.5 ~ 5.5	V
Control Voltage ( $V_{DD} \geq V_{OUT} + 1.5V$ )	$V_{DD}$	3.0 ~ 5.5	V
Junction Temperature Range	$T_J$	-40 ~ +125	°C
Ambient Temperature Range	$T_A$	-40 ~ +85	°C

## ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	$\theta_{JA}$	143	°C/W
Junction to Case	$\theta_{JC}$	14	°C/W

## ■ ELECTRICAL CHARACTERISTICS

( $V_{IN}=V_{OUT}+500\text{mV}$ ,  $V_{EN}=V_{DD}=5\text{V}$ ,  $C_{IN}=C_{OUT}=10\mu\text{F}$ ,  $T_A=T_J=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
POR Threshold				2.4	2.7	3	V
POR Hysteresis					0.2		V
Adjustable Pin Threshold		V <sub>TH_ADJ</sub>	I <sub>OUT</sub> =1mA		0.2	0.4	V
Reference Voltage (ADJ Pin Voltage)		V <sub>ADJ</sub>	I <sub>OUT</sub> =1mA	0.788	0.8	0.812	V
Fixed Output Voltage Range		ΔV <sub>OUT</sub>		-1.5	0	1.5	%
Line Regulation (V <sub>IN</sub> )		ΔV <sub>LINE_IN</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +0.5V to 5V, I <sub>OUT</sub> =1mA		0.2	0.6	%
Load Regulation (Note 2)		ΔV <sub>LOAD</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +1V, I <sub>OUT</sub> =1mA~3A		0.4	1	%
Dropout Voltage (Note 3)		V <sub>DROP</sub>	I <sub>OUT</sub> =2A		200	250	mV
			I <sub>OUT</sub> =3A		300	350	mV
Quiescent Current (Note 4)		I <sub>Q</sub>	V <sub>DD</sub> =5.5V		1.1		mA
Current Limit		I <sub>LIM</sub>		3.2	5.5		A
Short Circuit Current			V <sub>OUT</sub> <0.2V	0.5	1.8		A
V <sub>OUT</sub> Pull Low Resistance			V <sub>EN</sub> =0V		110		Ω
Soft-Start	L11831C	T <sub>SS</sub>	V <sub>OUT</sub> =10% to 90%		2.5		ms
Chip Enable							
EN Input Bias Current	L11831A	I <sub>EN</sub>	V <sub>EN</sub> =0V		12		μA
	L11831B		V <sub>EN</sub> =5V		12		μA
	L11831C		V <sub>EN</sub> =5V		12		μA
V <sub>DD</sub> Shutdown Current	L11831A	I <sub>SHDN</sub>	V <sub>EN</sub> =0V		10	20	μA
	L11831B					1	μA
	L11831C					1	μA
EN Threshold Voltage	Logic-High	V <sub>ENH</sub>	V <sub>DD</sub> =5V	1.2			V
	Logic-Low	V <sub>ENL</sub>	V <sub>DD</sub> =5V			0.7	V
Power Good							
POK Rising Threshold					90		%
POK Hysteresis				3	10		%
POK Sink Capability			I <sub>POK</sub> =10mA		0.2	0.4	V
POK Delay	L11831A/B	T <sub>POK</sub>	V <sub>OUT</sub> >90% to Pok Rising		0.25		ms
	L11831C				0.55		ms
Thermal Protection							
Thermal Shutdown Temperature		T <sub>SD</sub>			160		°C
Thermal Shutdown Hysteresis		ΔT <sub>SD</sub>			30		°C

Notes: 1. The device is not guaranteed to function outside its operating conditions.

2. Regulation is measured at constant junction temperature by using a 2ms current pulse. Devices are tested for load regulation in the load range from 1mA to 3A.
3. The dropout voltage is defined as  $V_{IN}-V_{OUT}$ , which is measured when  $V_{OUT}$  is  $V_{OUT(NORMAL)}-100\text{mV}$ . Only to output voltages of 2.5V and above dropout voltage specification applies. For output voltages below 2.5V, since the minimum input voltage is 2.5V, the drop-out voltage is nothing but the input to output differential.
4. Quiescent, or ground current, is the difference between input and output currents. It is defined by  $I_Q=I_{IN}-I_{OUT}$  under no load condition ( $I_{OUT}=0\text{mA}$ ). The total current drawn from the supply is the sum of the load current plus the ground pin current.

## ■ TYPICAL APPLICATION CIRCUIT

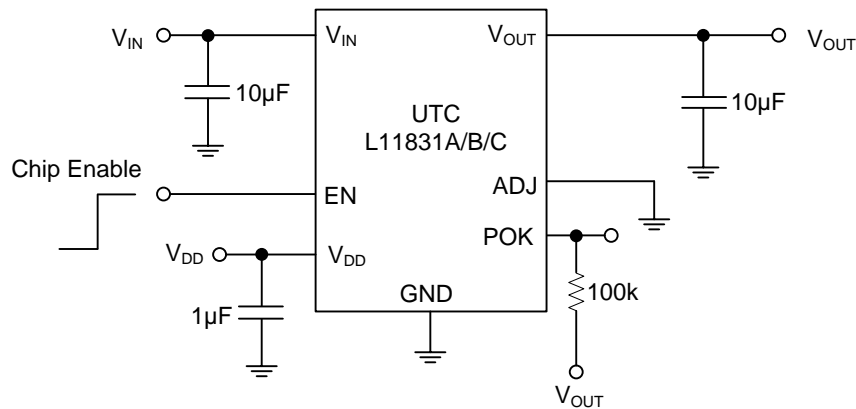


Figure 1. Fixed Voltage Regulator

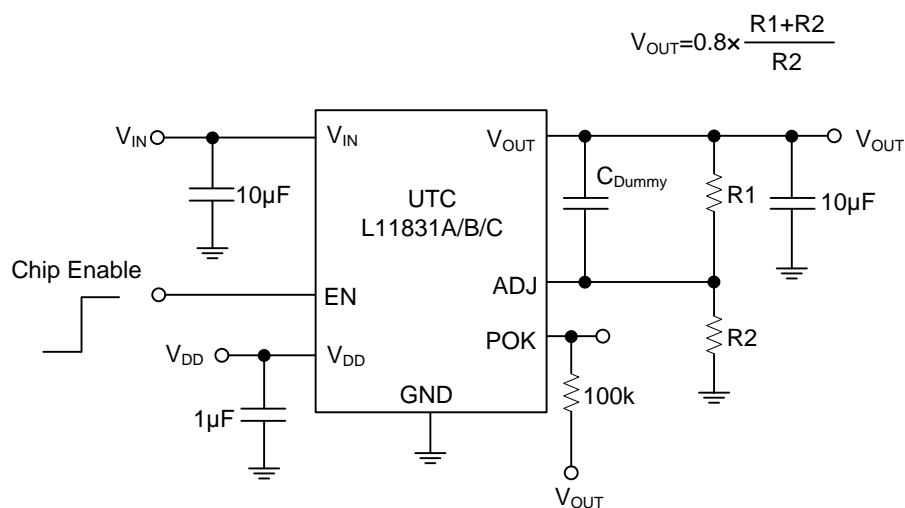


Figure 2. Adjustable Voltage Regulator

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.