

# **Data Book**

## **AU9720**

### **USB to Serial Bridge Controller**

### **Technical Reference Manual**

**Product Specification**

**Official Release**

**Revision 1.05W**

**Public**

**Apr 2005**

## Data Sheet Status

|                           |                                                                                       |
|---------------------------|---------------------------------------------------------------------------------------|
| Objective specification   | This data sheet contains target or goal specifications for product development.       |
| Preliminary specification | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification     | This data sheet contains final product specifications.                                |

## Revision History

| Date      | Revision | Description                                                         |
|-----------|----------|---------------------------------------------------------------------|
| Apr. 2005 | 1.05W    | Removed the schematics.<br>Please contact our sales if you need it. |
|           |          |                                                                     |
|           |          |                                                                     |
|           |          |                                                                     |
|           |          |                                                                     |
|           |          |                                                                     |



### Copyright Notice

Copyright 1997 - 2005  
Alcor Micro Corp.  
All Rights Reserved.

### Trademark Acknowledgements

The company and product names mentioned in this document may be the trademarks or registered trademarks of their manufacturers.

### Disclaimer

Alcor Micro Corp. reserves the right to change this product without prior notice.  
Alcor Micro Corp. makes no warranty for the use of its products and bears no responsibility for any error that appear in this document. Specifications are subject to change without prior notice.

### Contact Information:

**Web site:** <http://www.alcormicro.com/>

#### Taiwan

Alcor Micro Corp.  
4F, No 200 Kang Chien Rd., Nei Hu,  
Taipei, Taiwan, R.O.C.  
Phone: 886-2-8751-1984  
Fax: 886-2-2659-7723

#### Santa Clara Office

2901 Tasman Drive, Suite 206  
Santa Clara, CA 95054  
USA  
Phone: (408) 845-9300  
Fax: (408) 845-9086

#### Los Angeles Office

9070 Rancho Park Court  
Rancho Cucamonga, CA.91730  
USA  
Phone: (909) 483-9900  
Fax: (909) 944-0464

## Table of Contents

|          |                                                                |           |
|----------|----------------------------------------------------------------|-----------|
| <b>1</b> | <b><u>Introduction</u></b> .....                               | <b>6</b>  |
|          | 1.1 Description.....                                           | 6         |
|          | 1.2 Features.....                                              | 6         |
| <b>2</b> | <b><u>Application Block Diagram</u></b> .....                  | <b>7</b>  |
| <b>3</b> | <b><u>Pin Assignment</u></b> .....                             | <b>8</b>  |
| <b>4</b> | <b><u>System Architecture and Reference Design</u></b> .....   | <b>10</b> |
|          | 4.1 AU9720 Block Diagram.....                                  | 10        |
| <b>5</b> | <b><u>Electrical Characteristics</u></b> .....                 | <b>11</b> |
|          | 5.1 Recommended Operating Conditions.....                      | 11        |
|          | 5.2 General DC Characteristics.....                            | 11        |
|          | 5.3 DC Electrical Characteristics for 3.3 volts operation..... | 11        |
|          | 5.4 Crystal Oscillator Circuit Setup for Characterization..... | 12        |
|          | 5.5 ESD Test Results.....                                      | 12        |
|          | 5.6 Latch-Up Test Results.....                                 | 13        |
| <b>6</b> | <b><u>Mechanical Information</u></b> .....                     | <b>15</b> |

## List of Figures

|     |                                                                                     |    |
|-----|-------------------------------------------------------------------------------------|----|
| 2.1 | <a href="#">Block Diagram</a> .....                                                 | 7  |
| 3.1 | <a href="#">Pin Assignment Diagram</a> .....                                        | 8  |
| 4.1 | <a href="#">AU9720 Block Diagram</a> .....                                          | 10 |
| 5.1 | <a href="#">Crystal Oscillator Circuit Setup for Characterization Diagram</a> ..... | 11 |
| 5.2 | <a href="#">Latch-Up Test Results Diagram</a> .....                                 | 13 |
| 6.1 | <a href="#">Mechanical Information Diagram</a> .....                                | 15 |

## List of Tables

|     |                                                                             |    |
|-----|-----------------------------------------------------------------------------|----|
| 3.1 | <a href="#">Pin Descriptions</a> .....                                      | 9  |
| 5.1 | <a href="#">Recommended Operating Conditions</a> .....                      | 11 |
| 5.2 | <a href="#">General DC Characteristics</a> .....                            | 11 |
| 5.3 | <a href="#">DC Electrical Characteristics for 3.3 volts operation</a> ..... | 11 |
| 5.4 | <a href="#">ESD Data</a> .....                                              | 12 |
| 5.5 | <a href="#">Latch-Up Data Table</a> .....                                   | 13 |

# 1.0. Introduction

## 1.1. Description

The **AU9720** operates as a bridge between one USB port and one standard RS232 Serial port. The two large on-chip buffers have been pre-configured to accommodate the data flow between two different buses. The USB bulk-type data is adopted for maximum data transfer, which could be up to 6M bits/sec. Automatic handshake is supported at the Serial port. With these, a much higher baud rate can be achieved compared to the system uses legacy UART controller.


This device is also compliant with USB power management and remote wakeup scheme. Only minimum required power is consumed from the host during Suspend. By integrating all the function in a 28-SSOP package, this chip is suitable to be embedded inside a data cable. With such cables, users can connect between a PC host and any device with RS232 interface.

## 1.2. Features

- ◆ Support USB Specification v1.1 and USB CDC v1.1
- ◆ Support the RS232 Serial interface
- ◆ Support automatic handshake mode
- ◆ Support automatic hardware flow control with CTS/RTS
- ◆ Support automatic software flow control with XON/XOFF
- ◆ Support Remote wake-up and power management
- ◆ 384/128 bytes buffer each for upstream and downstream data flow
- ◆ Support default ROM or external EEPROM for device configuration
- ◆ On chip USB transceiver
- ◆ Crystal oscillator running at 12MHz
- ◆ Support Windows 98/SE, ME, 2000, XP, Windows CE3.0, CE.NET, Linux, and Mac OS
- ◆ 28 Pins SSOP Lead-Free package

## 2.0. Application Diagram


The following diagram shows several typical applications using AU9720. By connecting the USB connector to a desktop or notebook PC through AU9720, which is implemented as a bus-powered, a programmable speed could be gained to transfer data between PC and mobile phones with much higher baud rate speed than what normal UART devices could offer.

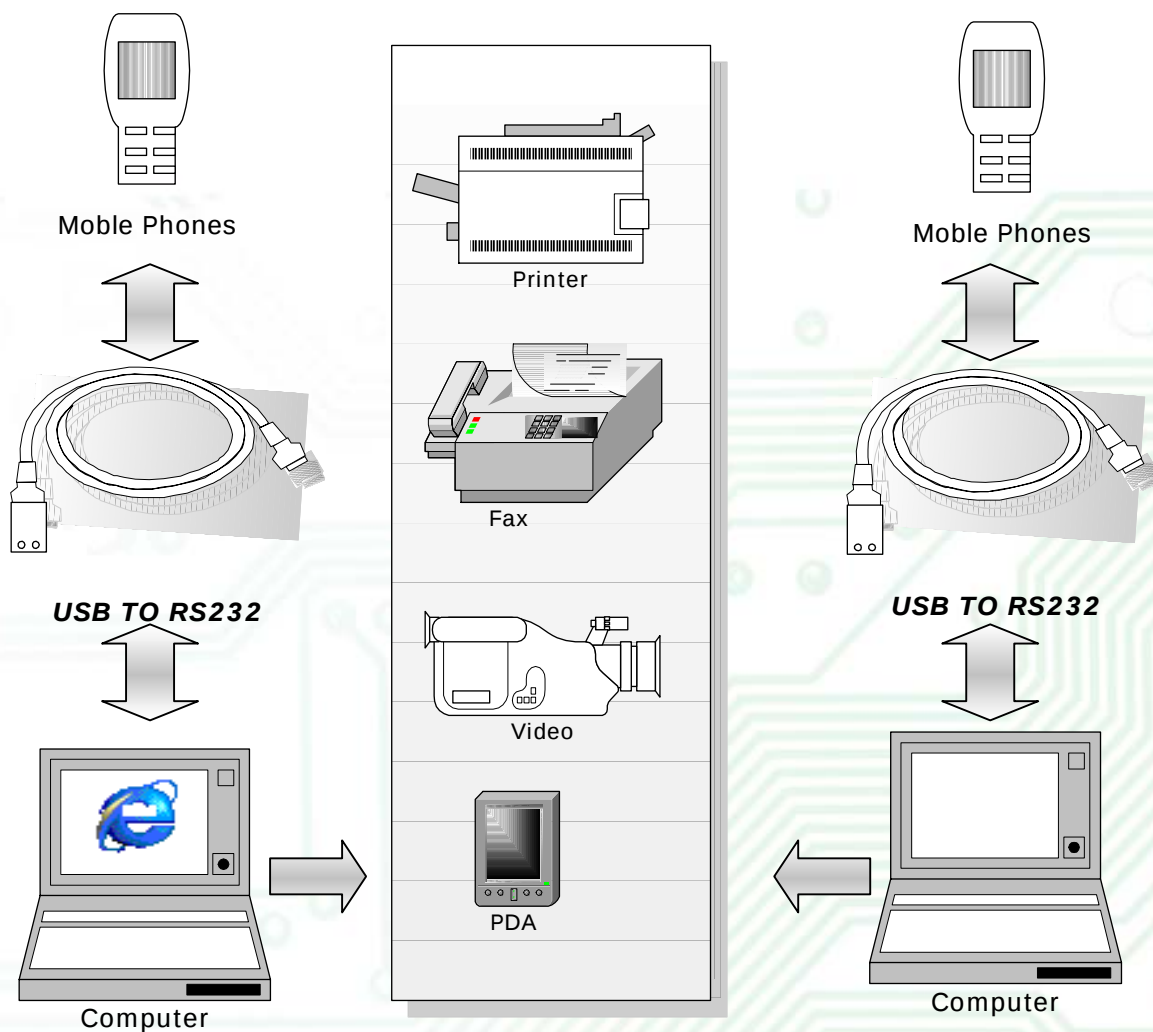

## 3.0. Pin Assignment

The AU9720 is packaged in 28pin SSOP Lead-Free. The following figure shows signal name for each pin and the table in the following page describes each pin in details.

**Figure 3.1 Pin Assignment Diagram**

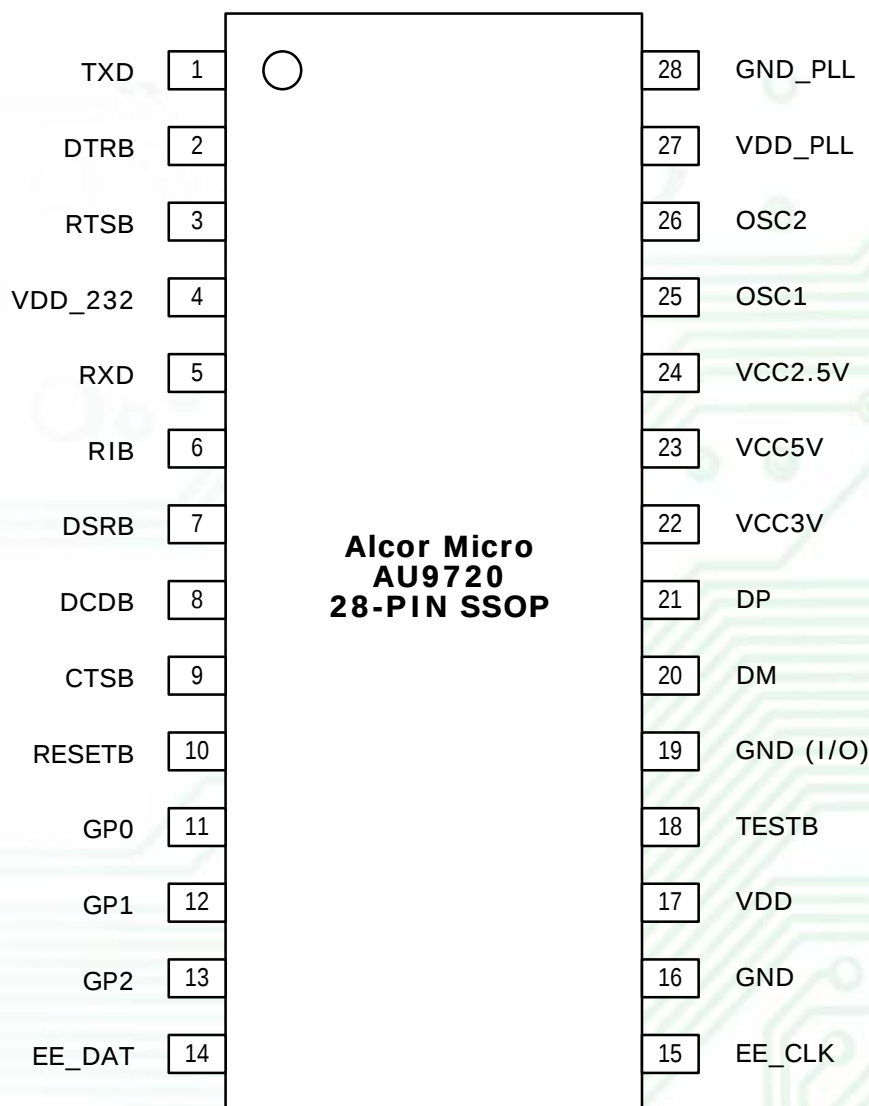


**Table 3.1 Pin Assignments**

| Pin # | Pin Name  | I/O | Description                                                                                                                                |
|-------|-----------|-----|--------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | TXD       | O   | Data Output to serial port                                                                                                                 |
| 2     | DTRB      | O   | Low: Data Terminal Ready (serial port)                                                                                                     |
| 3     | RTSB      | O   | Low: Request To Send; (serial port)                                                                                                        |
| 4     | VDD_232   | PWR | VDD for RS-232 (Input)                                                                                                                     |
| 5     | RXD       | I   | Data Input from serial port                                                                                                                |
| 6     | RIB       | I   | Low: Ring Indicator (Serial Port)                                                                                                          |
| 7     | DSRB      | I   | Low: Data Set Ready (Serial port)                                                                                                          |
| 8     | DCDB      | I   | Low: Data Carrier Detect (serial port)                                                                                                     |
| 9     | CTSB      | I   | Low: Clear to send (serial port)                                                                                                           |
| 10    | RESETB    | I   | System reset                                                                                                                               |
| 11    | GP0       | I/O | Reserved for System Output use                                                                                                             |
| 12    | GP1       | I/O | High (connect with external 47K resistor) for USB Heavy Load (500mA); Low (connect with external 220K resistor) for USB Light Load (100mA) |
| 13    | GP2       | I/O | Shutdown Transceiver under Suspend mode                                                                                                    |
| 14    | EE_DAT    | I/O | External EEPROM data signal                                                                                                                |
| 15    | EE_CLK    | I/O | External EEPROM clock                                                                                                                      |
| 16    | GND       | PWR | Ground                                                                                                                                     |
| 17    | VDD       | PWR | Power input (3.3V)                                                                                                                         |
| 18    | TESTB     | I   | Reserved                                                                                                                                   |
| 19    | GND (I/O) | PWR | I/O Ground                                                                                                                                 |
| 20    | DM        | I/O | USB DMINUS signal                                                                                                                          |
| 21    | DP        | I/O | USB DPLUS Signal                                                                                                                           |
| 22    | VCC3V     | PWR | 3.3v power output                                                                                                                          |
| 23    | VCC5V     | PWR | 5v power input                                                                                                                             |
| 24    | VCC2.5V   | PWR | 2.5v power output                                                                                                                          |
| 25    | OSC1      | I   | Crystal oscillator input                                                                                                                   |
| 26    | OSC2      | O   | Crystal oscillator output                                                                                                                  |
| 27    | VDD_PLL   | PWR | 3.3V input power for PLL                                                                                                                   |
| 28    | GND_PLL   | PWR | Ground for PLL                                                                                                                             |

## 4.0. System Architecture and Reference Design

### 4.1. Block Diagram

Figure 4.1 AU9720 USB to Serial Bridge controller Block Diagram

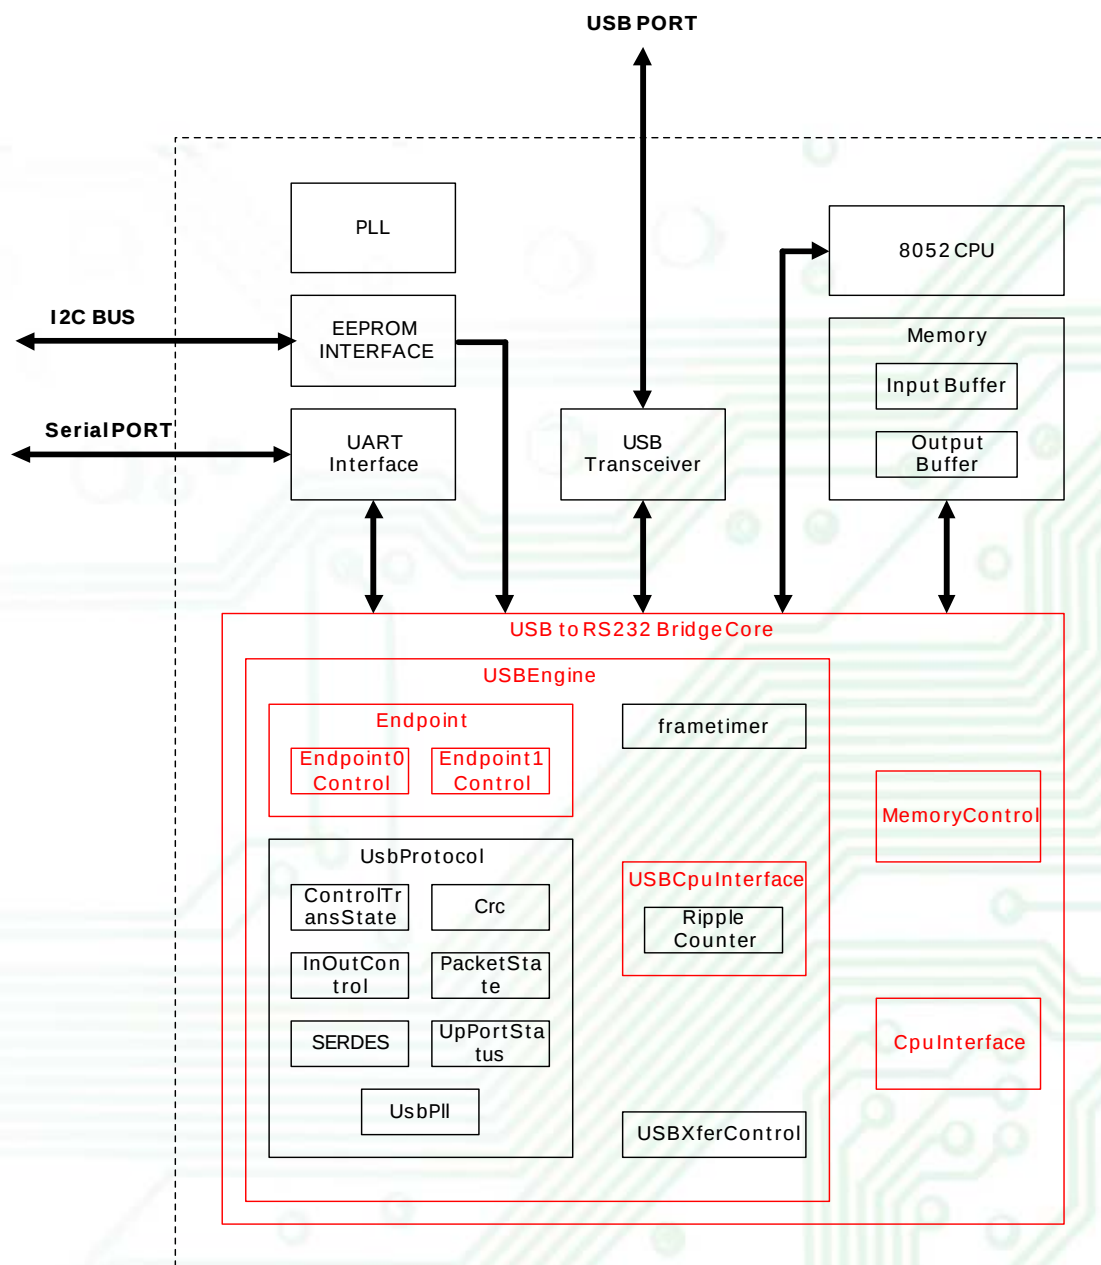

## 5.0. Electrical Characteristics

### 5.1 Recommended Operating Conditions

**Table 5.1 Recommended Operating Conditions**

| SYMBOL           | PARAMETER             | MIN  | TYP | MAX             | UNITS |
|------------------|-----------------------|------|-----|-----------------|-------|
| V <sub>CC</sub>  | Power Supply          | 4.75 | 5   | 5.25            | V     |
| V <sub>IN</sub>  | Input Voltage         | 0    |     | V <sub>CC</sub> | V     |
| T <sub>OPR</sub> | Operating Temperature | 0    |     | 85              | °C    |
| T <sub>STG</sub> | Storage Temperature   | -40  |     | 125             | °C    |

### 5.2 General DC Characteristics

**Table 5.2 General DC Characteristics**

| SYMBOL           | PARAMETER                         | CONDITIONS              | MIN | TYP | MAX | UNITS |
|------------------|-----------------------------------|-------------------------|-----|-----|-----|-------|
| I <sub>IL</sub>  | Input low current                 | no pull-up or pull-down | -1  |     | 1   | μA    |
| I <sub>IH</sub>  | Input high current                | no pull-up or pull-down | -1  |     | 1   | μA    |
| I <sub>OZ</sub>  | Tri-state leakage current         |                         | -10 |     | 10  | μA    |
| C <sub>IN</sub>  | Input capacitance                 |                         |     | 5   |     | pF    |
| C <sub>OUT</sub> | Output capacitance                |                         |     | 5   |     | pF    |
| C <sub>BID</sub> | Bi-directional buffer capacitance |                         |     | 5   |     | pF    |

### 5.3 DC Electrical Characteristics for 3.3 volts operation


**Table 5.3 DC Electrical Characteristics for 3.3 volts operation**

| SYMBOL          | PARAMETER                     | CONDITIONS                                                          | MIN | TYP      | MAX | UNITS |
|-----------------|-------------------------------|---------------------------------------------------------------------|-----|----------|-----|-------|
| V <sub>IL</sub> | Input Low Voltage             | CMOS                                                                |     |          | 0.9 | V     |
| V <sub>IH</sub> | Input Hight Voltage           | CMOS                                                                | 2.3 |          |     | V     |
| V <sub>OL</sub> | Output low voltage            | I <sub>OL</sub> =4mA, 16mA                                          |     |          | 0.4 | V     |
| V <sub>OH</sub> | Output high voltage           | I <sub>OH</sub> =4mA, 16mA                                          | 2.4 |          |     | V     |
| R <sub>I</sub>  | Input Pull-up/down resistance | V <sub>il</sub> =0 <sub>V</sub> or V <sub>ih</sub> =V <sub>CC</sub> |     | 10K/200K |     | KΩ    |

## 5.4 Crystal Oscillator Circuit Setup for Characterization

The following setup was used to measure the open loop voltage gain for crystal oscillator circuits. The feedback resistor serves to bias the circuit at its quiescent operating point and the AC coupling capacitor,  $C_s$ , is much larger than  $C_1$  and  $C_2$ .

Figure 5.1 Crystal Oscillator Circuit Setup for Characterization

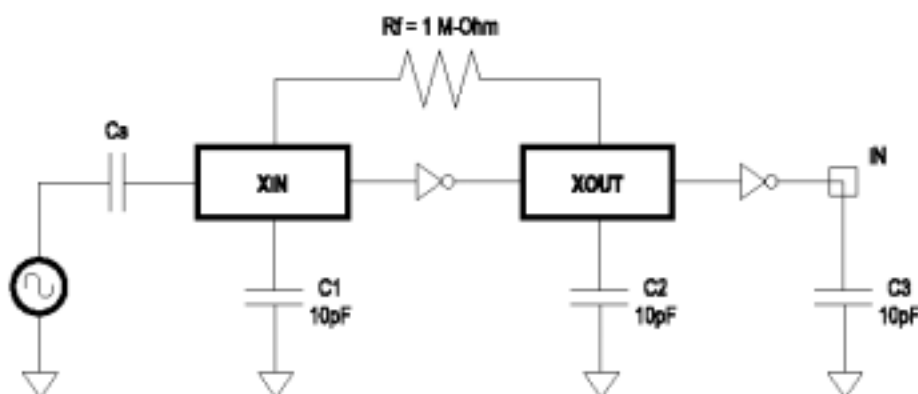

## 5.5 ESD Test Results

**Test Description:** ESD Testing was performed on a Zapmaster system using the Human-Body-Model (HBM) and Machine-Model (MM), according to MIL-STD 883 and EIAJ IC-121 respectively.

- Human-Body-Model stresses devices by sudden application of a high voltage supplied by a 100pF capacitor through 1.5k-ohm resistance.
- Machine-Model stresses devices by sudden application of a high voltage supplied by a 200pF capacitor through very low (0 ohm) resistance.

### Test circuit & condition

- Zap Interval: 1 second
- Number of Zaps: 3 positive and 3 negative at room temperature
- Criteria: I-V Curve Tracing

Table 5.4 ESD Data

| Model | Mode          | S/S | Target | Results |
|-------|---------------|-----|--------|---------|
| HBM   | Vdd, Vss, I/C | 15  | 6000V  | PASS    |
| MM    | Vdd, Vss, I/C | 15  | 200V   | PASS    |

## 5.6 Latch-Up Test Results


**Test Description:** Latch-Up testing was performed at room ambience using an IMCS-4600 system which applies a stepped voltage to one pin per device with all other pins open except Vdd and Vss, to which 5Volts and ground were biased respectively. Testing was started at 5.0V (Positive) or 0V (Negative), and the DUT was biased for 0.5 seconds. If neither the PUT current supply nor the device current supply reached the predefined limit (DUT=00mA, Icc=100mA), then the voltage was increased by 0.1Volts and the pin was tested again.

This procedure was recommended by the JEDEC JC-40.2 CMOS Logic standardization committee.


### Notes:

1. DUT: The device under test.
2. PUT: The pin under test.


Figure 5.2 Latch-Up Test Results

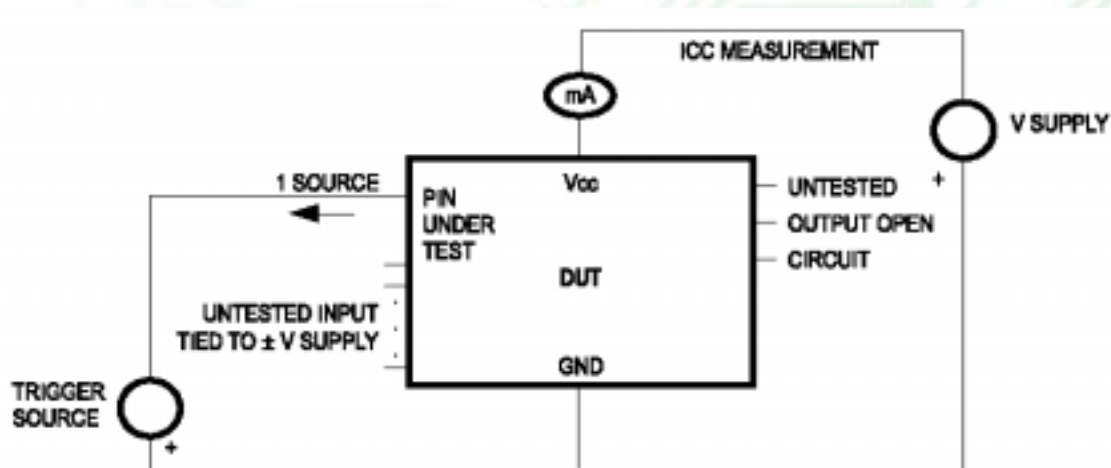

Test Circuit: Positive Input / Output Overvoltage / Overcurrent

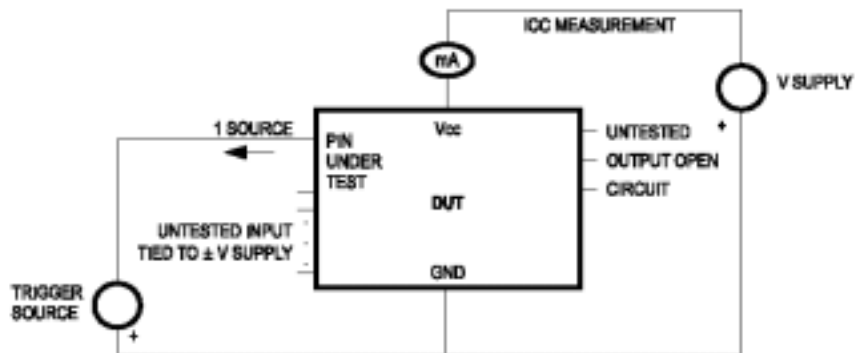

Test Circuit: Negative Input /Output Overvoltage /Overcurrent

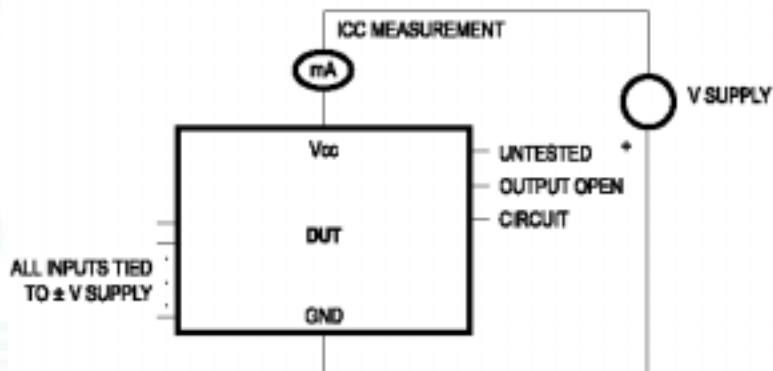


### Supply Overvoltage Test

Table 5.5 Latch-Up Data

| Mode      |   | Voltage (V) /Current (mA) | S/S | Results |
|-----------|---|---------------------------|-----|---------|
| Voltage   | + | 11.0                      | 5   | Pass    |
|           | - | 11.0                      | 5   | Pass    |
| Current   | + | 200                       | 5   | Pass    |
|           | - | 200                       | 5   | Pass    |
| Vdd - Vxx |   | 9.0                       | 5   | Pass    |

## 6.0 Mechanical Information

Figure 6.1 Mechanical Information Diagram

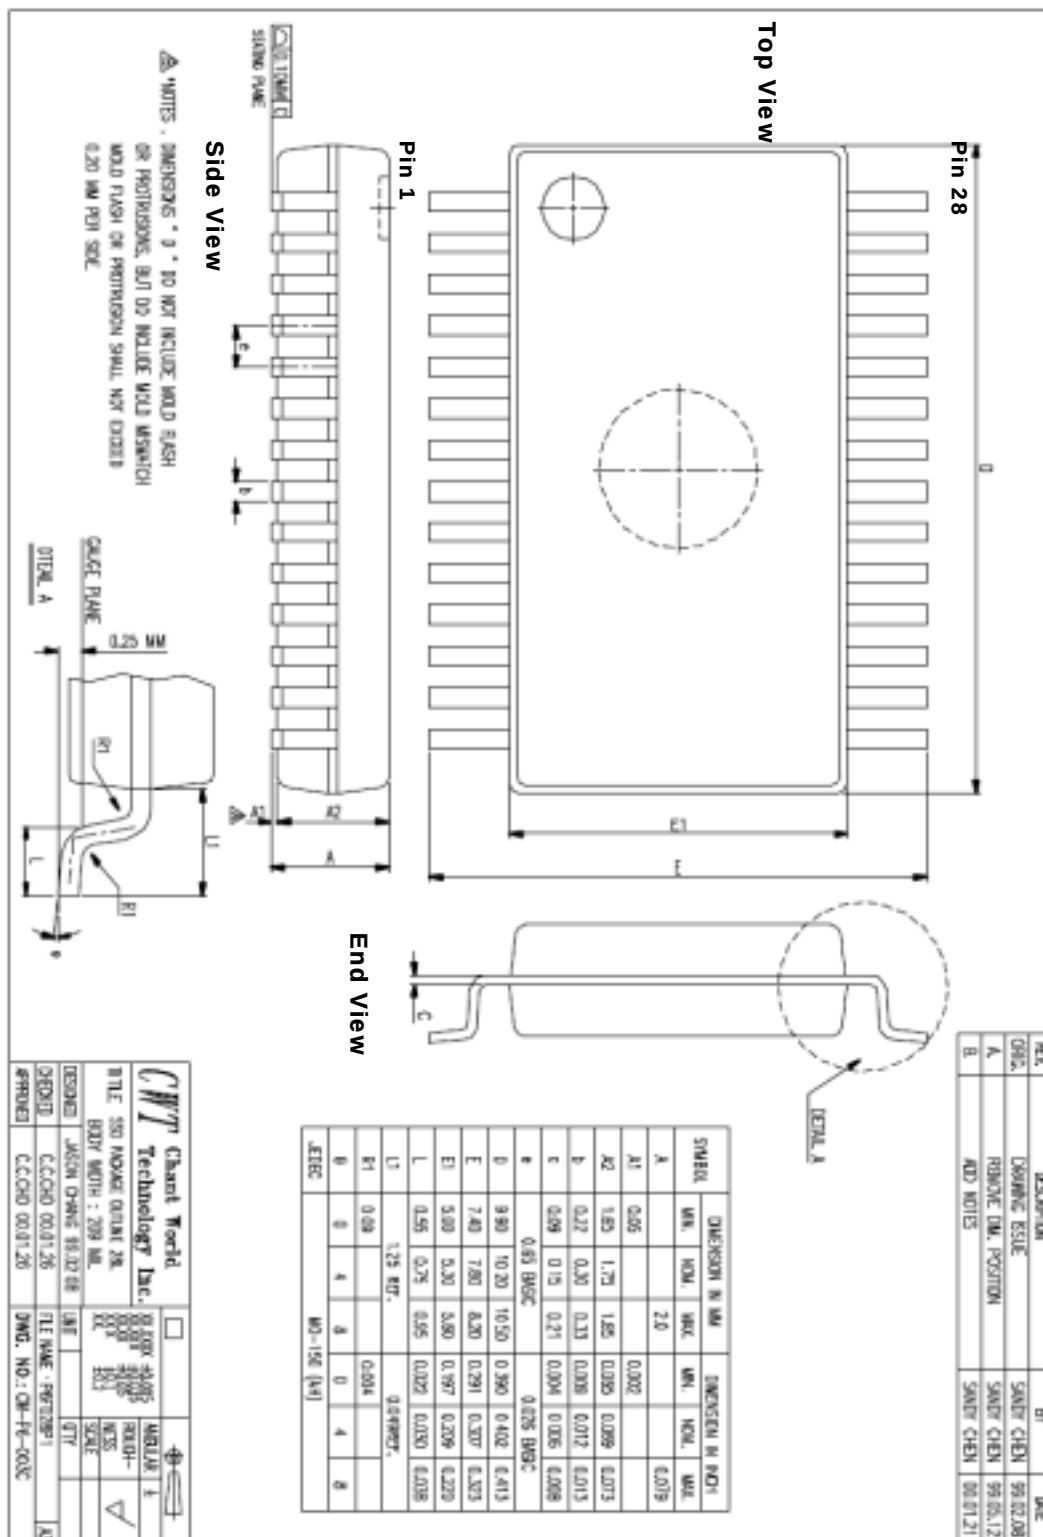



## 【MEMO】

### About Alcor Micro, Corp

Alcor Micro, Corp. designs, develops and markets highly integrated and advanced peripheral semiconductor, and software driver solutions for the personal computer and consumer electronics markets worldwide. We specialize in USB solutions and focus on emerging technology such as USB and IEEE 1394. The company offers a range of semiconductors including controllers for USB hub, integrated keyboard/USB hub and USB Flash memory card reader...etc. Alcor Micro, Corp. is based in Taipei, Taiwan, with sales offices in Taipei, Japan, Korea and California.

Alcor Micro is distinguished by its ability to provide innovative solutions for spec-driven products. Innovations like single chip solutions for traditional multiple chip products and on-board voltage regulators enable the company to provide cost-efficiency solutions for the computer peripheral device OEM customers worldwide.