



SAW Components

Preliminary Data Sheet B4229

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are in a bold, sans-serif font, appearing to be part of a larger, curved structure that resembles a stylized globe or a series of overlapping planes. The graphic is rendered in shades of gray and white, with a glowing effect around the letters.



SAW Components

B4229

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Preliminary Data Sheet



Features

- Low-loss duplexer for cellular band mobile telephone systems
- 50 Ω ports by integrated matching network
- Multifunctional ceramic base material for Surface Mounted Technology (SMT)
- Small size and low height


Chip sized SAW package QCS12C

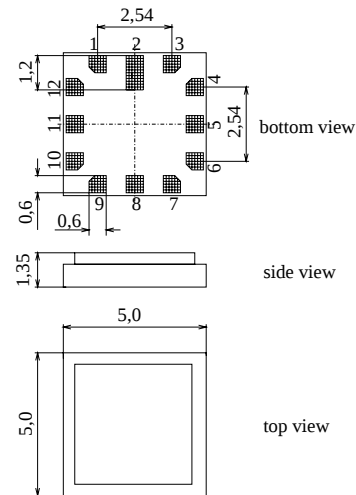

Dimensions in mm, approx. weight 0,13 g

Pin configuration

5	RX Output
11	TX Input
8	Antenna
1, 2, 3, 4, 6	Ground
7, 9, 10, 12	Ground

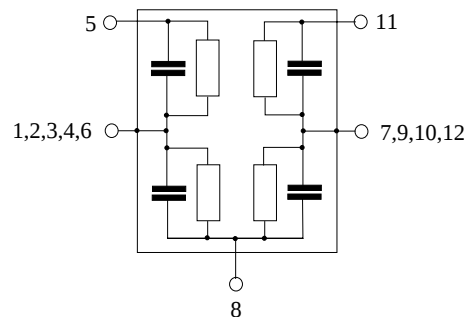

Type	Ordering code	Marking and Package according to	Packing according to
B4229	B39881-B4229-D510	C61157-A3-A3	F61074-V8159-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operating temperature range	T	- 30/+ 85	$^{\circ}\text{C}$	source and load impedance 50 Ω } continuous wave
Storage temperature range	T_{stg}	- 40/+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Input power max.	P_{IN}	30	dBm	
824,0 ... 849,0 MHz		10	dBm	
elsewhere				



SAW Components

B4229

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Preliminary Data Sheet



Characteristics

Reference temperature	T	$= 25 \pm 2^\circ \text{C}$
ANT terminating impedance	Z_{ANT}	$= 50 \Omega$
RX terminating impedance	Z_{RX}	$= 50 \Omega$
TX terminating impedance	Z_{TX}	$= 50 \Omega$

Characteristics TX - ANT		min.	typ.	max.	
Center frequency	f_c	—	836,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,2	2,4	dB
824,00 ... 849,00 MHz		—	2,2	2,4	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,1	dB
824,00 ... 849,00 MHz		—	0,8	1,1	dB
Return loss		7,5	8,2	—	dB
824,00 ... 849,00 MHz		7,5	8,2	—	dB
Attenuation	α	21	32	—	dB
0,03 ... 800,00 MHz		21	32	—	dB
869,00 ... 894,00 MHz		44	46	—	dB
914,00 ... 1004,00 MHz		30	34	—	dB
1004,00 ... 3200,00 MHz		20	23	—	dB
1648,00 ... 1698,00 MHz		30	38	—	dB
2472,00 ... 2547,00 MHz		20	25	—	dB

Characteristics ANT - RX		min.	typ.	max.	
Center frequency	f_c	—	881,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,9	3,3	dB
869,00 ... 894,00 MHz		—	2,9	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,0	1,8	dB
869,00 ... 894,00 MHz		—	1,0	1,8	dB
Return loss		9,0	10,0	—	dB
869,00 ... 894,00 MHz		9,0	10,0	—	dB
Attenuation	α	35	40	—	dB
0,03 ... 824,00 MHz		35	40	—	dB
824,00 ... 849,00 MHz		54	55	—	dB
914,00 ... 1000,00 MHz		36	40	—	dB
1000,00 ... 1200,00 MHz		36	39	—	dB
1200,00 ... 3200,00 MHz		30	35	—	dB

Characteristics TX - RX		min.	typ.	max.	
Isolation between TX and RX path	α	54	56	—	dB
824,00 ... 849,00 MHz		54	56	—	dB
869,00 ... 894,00 MHz		45	46	—	dB



SAW Components

B4229

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Preliminary Data Sheet



Characteristics

Reference temperature	T	= -30 to 85 °C
ANT terminating impedance	Z_{ANT}	= 50 Ω
RX terminating impedance	Z_{RX}	= 50 Ω
TX terminating impedance	Z_{TX}	= 50 Ω

Characteristics TX - ANT		min.	typ.	max.	
Center frequency	f_c	—	836,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,2	2,5	dB
824,00 ... 849,00 MHz		—	2,2	2,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,1	dB
824,00 ... 849,00 MHz		—	0,8	1,1	dB
Return loss		7,5	8,2	—	dB
824,00 ... 849,00 MHz		7,5	8,2	—	dB
Attenuation	α	21	32	—	dB
0,03 ... 800,00 MHz		21	32	—	dB
869,00 ... 894,00 MHz		44	45	—	dB
914,00 ... 1004,00 MHz		30	34	—	dB
1004,00 ... 3200,00 MHz		20	23	—	dB
1648,00 ... 1698,00 MHz		30	38	—	dB
2472,00 ... 2547,00 MHz		20	25	—	dB

Characteristics ANT - RX		min.	typ.	max.	
Center frequency	f_c	—	881,5	—	MHz
Maximum insertion attenuation	α_{max}	—	3,4	3,8	dB
869,00 ... 894,00 MHz		—	3,4	3,8	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,5	2,3	dB
869,00 ... 894,00 MHz		—	1,5	2,3	dB
Return loss		9,0	10,0	—	dB
869,00 ... 894,00 MHz		9,0	10,0	—	dB
Attenuation	α	35	40	—	dB
0,03 ... 824,00 MHz		35	40	—	dB
824,00 ... 849,00 MHz		53	54	—	dB
914,00 ... 1000,00 MHz		36	40	—	dB
1000,00 ... 1200,00 MHz		36	39	—	dB
1200,00 ... 3200,00 MHz		30	35	—	dB

Characteristics TX - RX		min.	typ.	max.	
Isolation between TX and RX path	α	52	53	—	dB
824,00 ... 849,00 MHz		52	53	—	dB
869,00 ... 894,00 MHz		45	46	—	dB



SAW Components

B4229


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Preliminary Data Sheet



Frequency Response TX - ANT

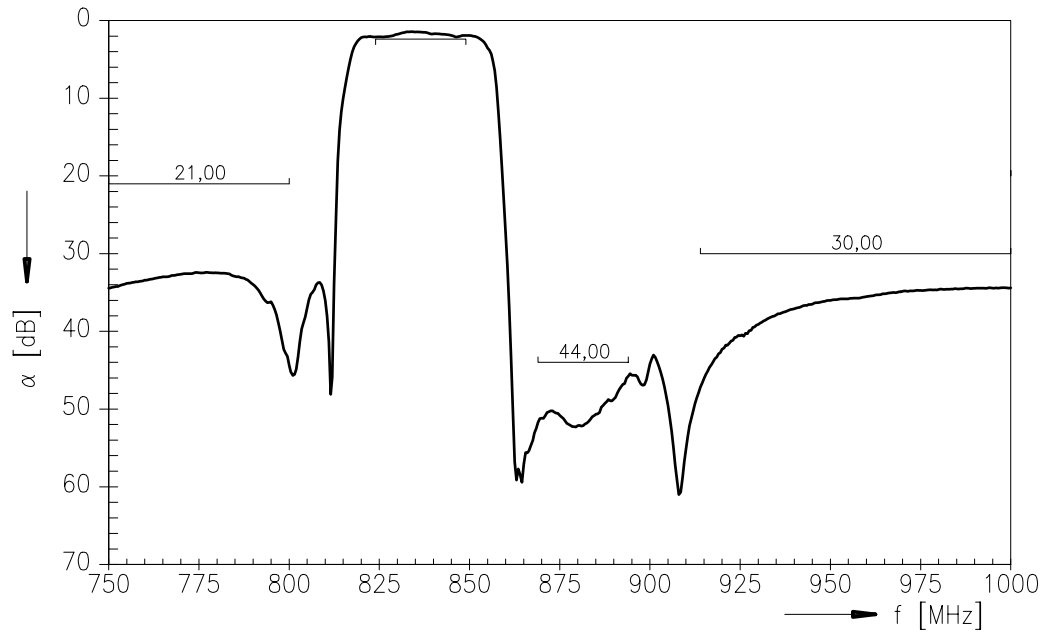

Frequency Response TX - ANT (wideband)

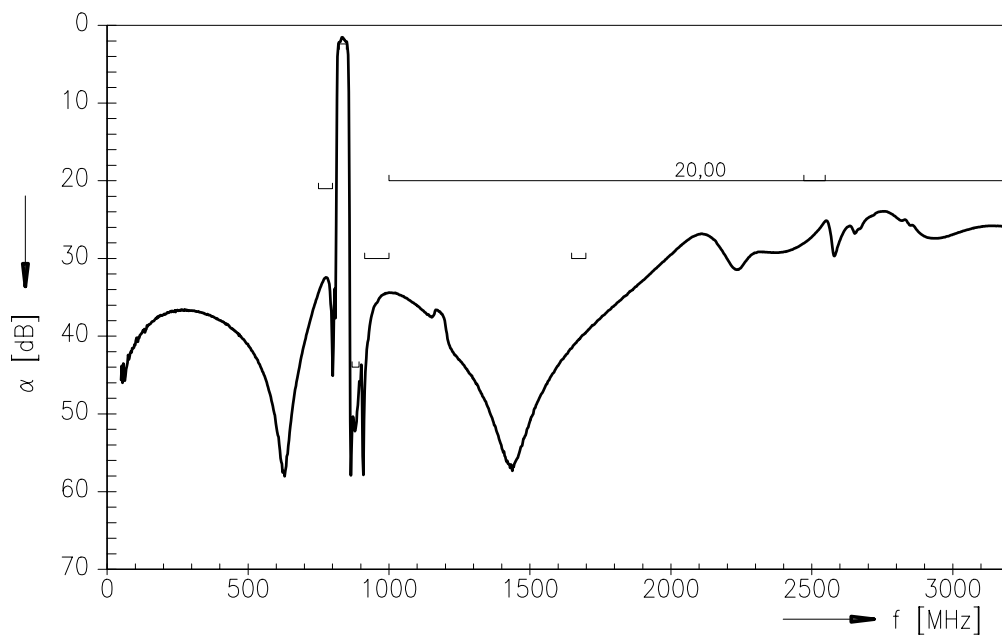



SAW Components

B4229


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Preliminary Data Sheet



Frequency Response ANT - RX

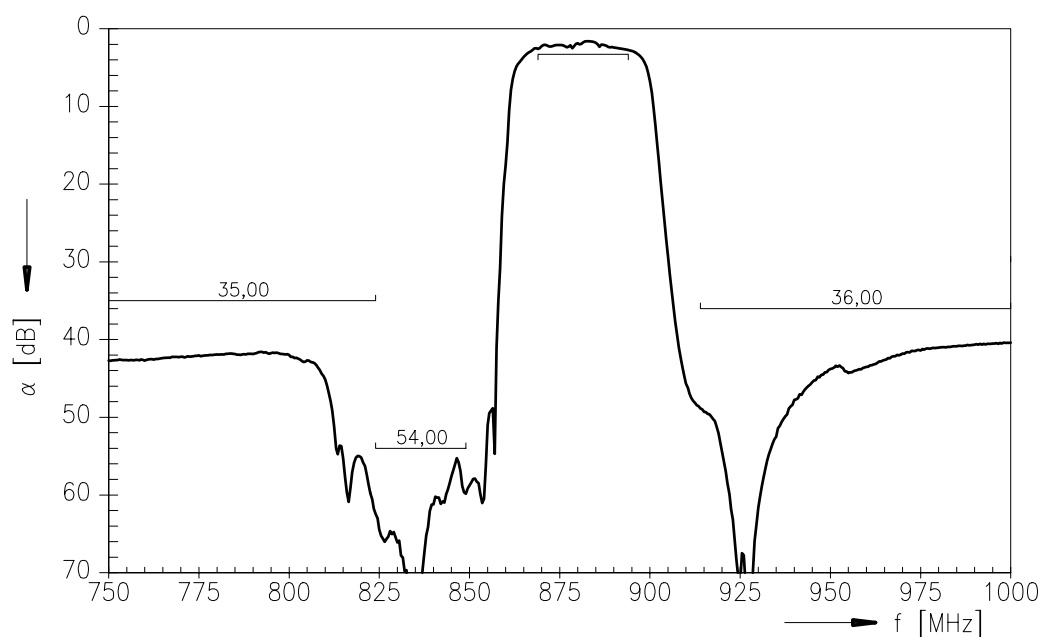

Frequency Response ANT - RX (wideband)

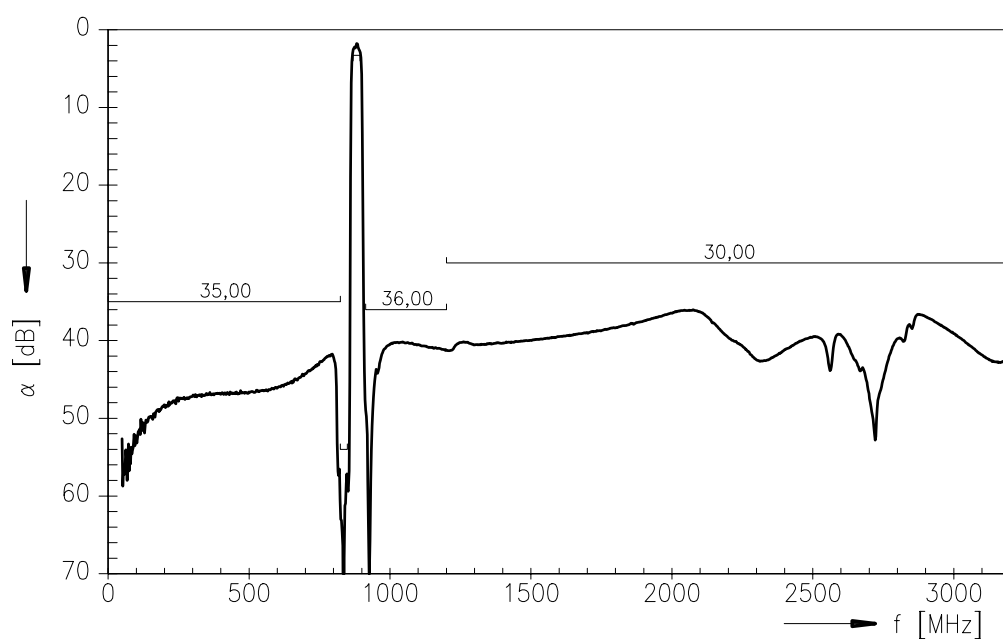



SAW Components

B4229


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Preliminary Data Sheet



Frequency Response TX - RX

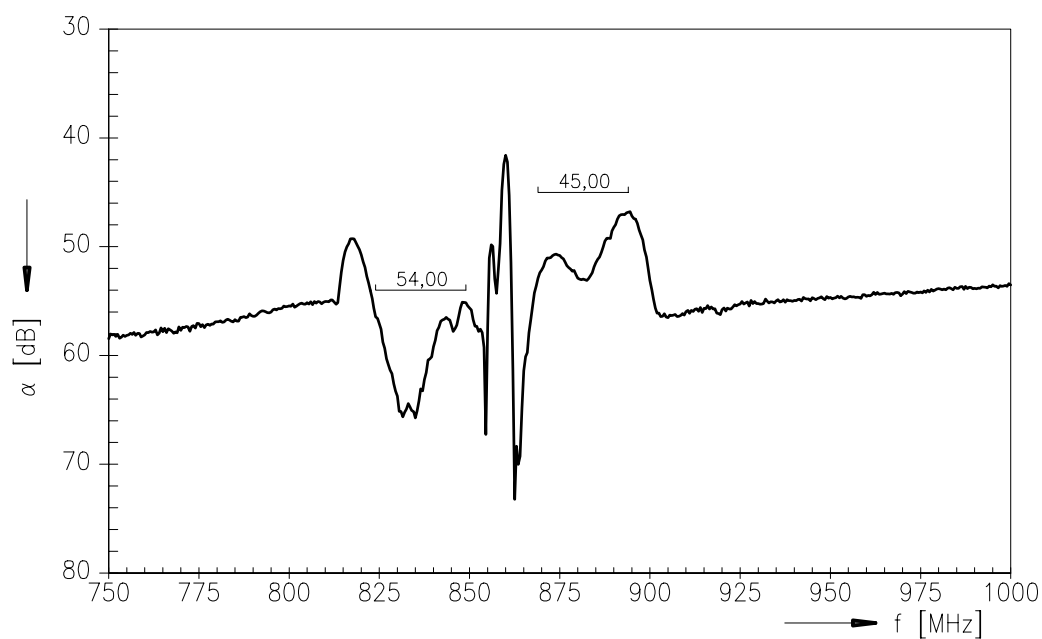

Frequency Response TX - RX (wideband)

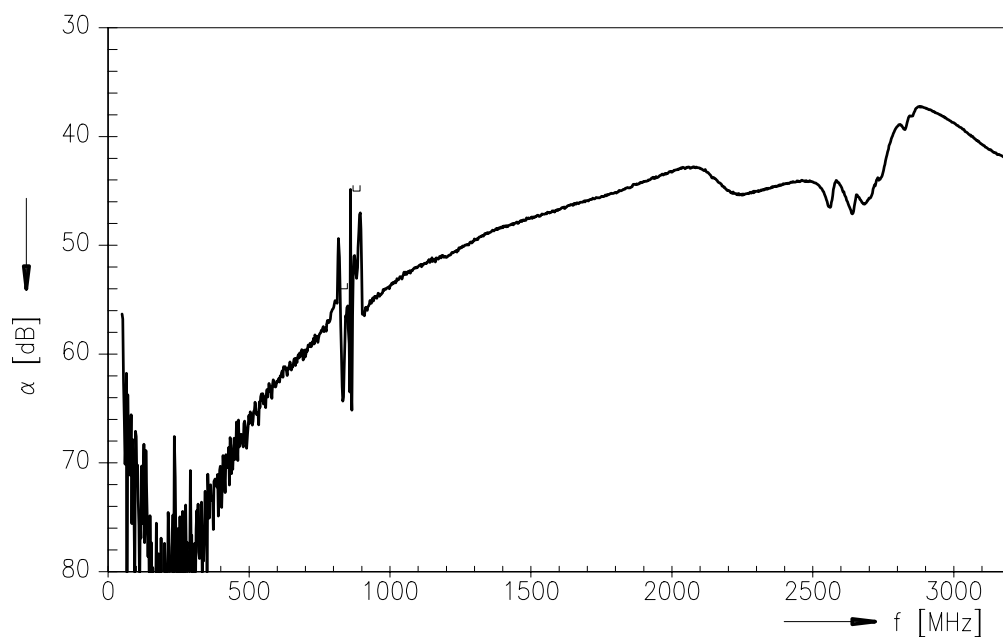



SAW Components

B4229

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Preliminary Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2002. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.