

## 1 Scope

The present specifications shall apply to an RM11C.

## 2 Outline

Type	Silicon Diode
Structure	Resin Molded
Applications	Commercial Frequency Rectification

## 3 Flammability

UL94V-0(Equivalent)



## 4 Absolute maximum ratings

No.	Item	Symbol	Unit	Rating	Conditions
1	Transient Peak Reverse Voltage	$V_{RSM}$	V	1000	
2	Peak Reverse Voltage	$V_{RM}$	V	1000	
3	Average Forward Current	$I_{F(AV)}$	A	1.2	Refer to derating curve in Section 7
4	Peak Surge Forward Current	$I_{FSM}$	A	100	10ms. Half sine wave, one shot
5	$I^2t$ Limiting Value	$I^2t$	$A^2s$	50	$1ms \leq t \leq 10ms$
6	Junction Temperature	$T_j$	°C	-40 to +150	
7	Storage Temperature	$T_{sig}$	°C	-40 to +150	


5 Electrical characteristics ( $T_a=25^\circ\text{C}$ , unless otherwise specified)

No.	Item	Symbol	Unit	Rating	Conditions
1	Forward Voltage Drop	$V_F$	V	0.92 max.	$I_F=1.5A$
2	Reverse Leakage Current	$I_R$	$\mu A$	10 max.	$V_R=V_{RM}$
3	Reverse Leakage Current Under High Temperature	$H \cdot I_R$	$\mu A$	50 max.	$V_R=V_{RM}$ , $T_j=100^\circ\text{C}$
4	Thermal Resistance	$R_{th(j-l)}$	°C/W	15 max.	Between Junction and Lead

6 Characteristics

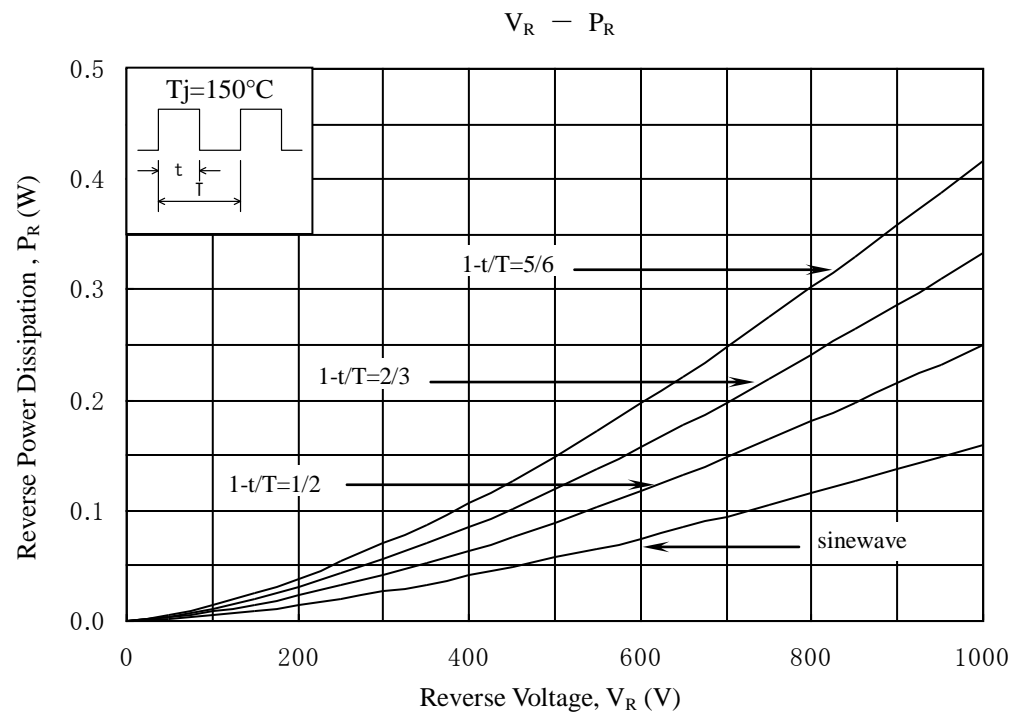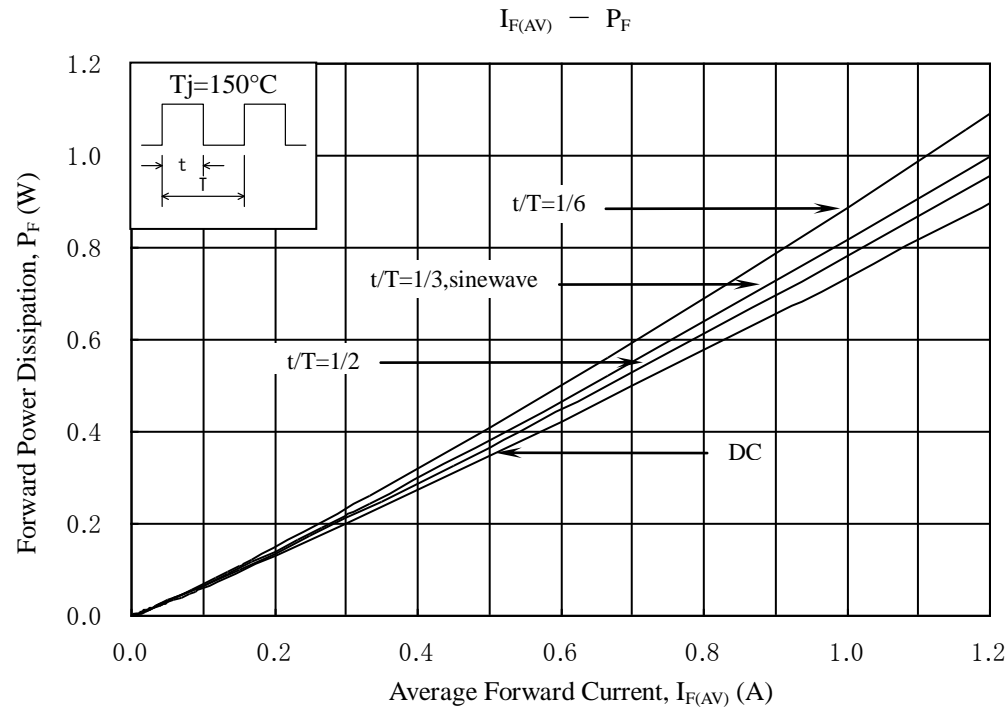


7 Derating

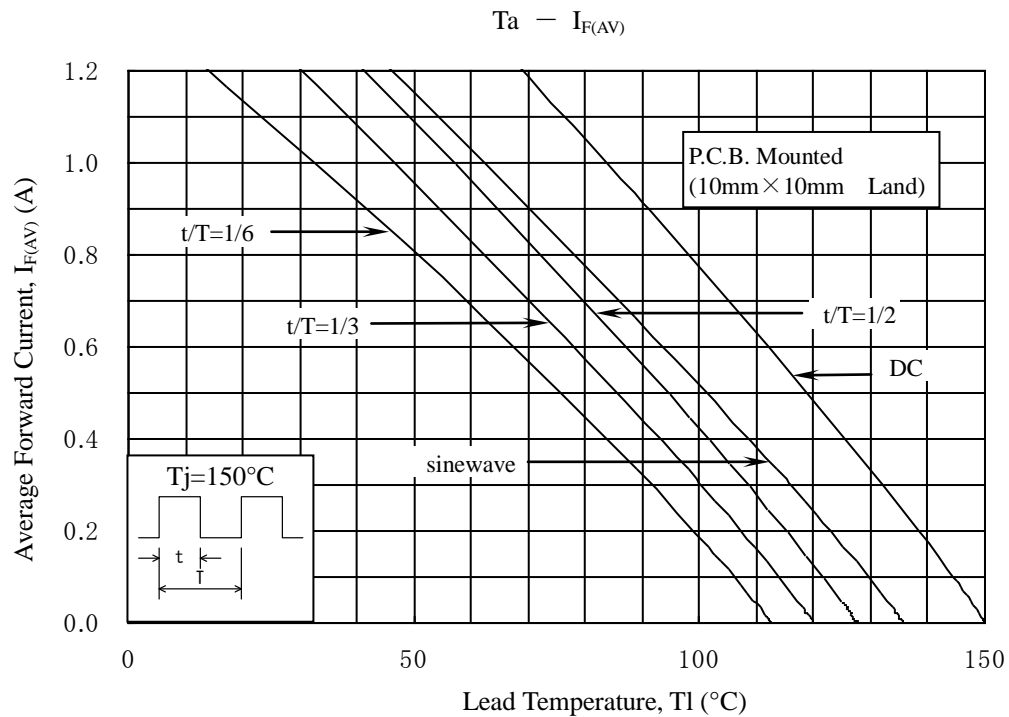

## 8 Package information

### 8-1 Package type, physical dimensions and material

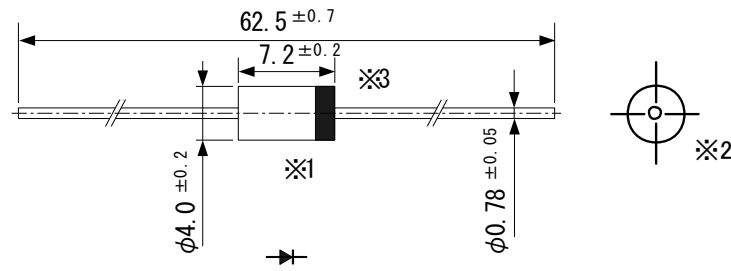

\*1 The allowance position of Body against the center of whole lead wire is 0.5mm(max.)

\*2 The centric allowance of lead wire against center of physical body is 0.3mm(max.)

\*3 The burr may exit up to 2mm from the body of lead

Dimensions in mm

## 8-2 Appearance

The body shall be clean and shall not bear any stain, rust or flaw.

### 8-3 Marking

- ① Type number      RM11C
- ② Lot number 1  
    First digit: Last digit of Year  
    Second digit: Month  
                From 1 to 9 for Jan. to Sep.  
                O for Oct., N for Nov., and D for Dec.
- ③ Lot number 2 (ten days)
  - Top of the month
  - Middle of month
  - End of month

