


IC-Fassungen, Low cost-Version, Raster 2.54mm

IC-sockets, low cost version, pitch 2.54mm



Isolierkörper

Polyester, glasfaserverstärkt,
UL 94V-0

Kontakte

Phosphorbronze, verzinnt

Betriebstemperatur

-55°C bis + 105°C

Strombelastbarkeit

1A

Durchschlagsspannung

1000V AC (1min)

Insulator

Polyester, glass reinforced
UL 94V-0

Contacts

Phosphor bronze, tin plated

Operating temperature

-55°C to +105°C



Current rating

1A

Withstanding voltage

1000V AC (1min)

		Dimensions		
No. of Contacts	Qty per Tube	A	B	C
06	80	7.62	10.0	7.62
08	60	10.06	9.96	7.62
14	34	17.68	9.96	7.62
16	30	20.22	9.96	7.62
18	26	22.76	9.96	7.62
20	24	22.86	9.96	7.62
22	21	27.80	9.96	7.62
22*	21	27.70	12.62	10.16
24	20	30.38	17.68	15.24
24**	20	30.38	17.68	7.62
28	17	35.46	17.68	15.24
28**	17	35.46	17.68	7.62
32	15	40.50	17.68	15.24
40	12	50.70	17.68	15.24

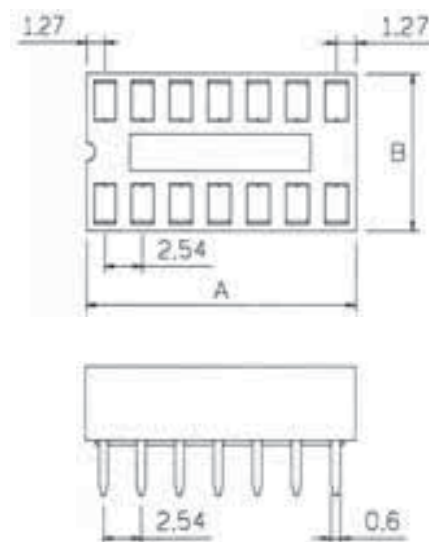

Bestellcode:
Ordercode :

A - **x** - **LC** - **x**

Bitte „x“ durch die unten geeignete Option ersetzen
Please replace „x“ with appropriate option listed below

1.

2.

1.

Polzahl

06, 08, 14, 16, 18, 20, 22, 24, 28, 32, 40

2.

Ausführung

TT -Standard

T2* -Gesamtbreite(B) des Isolierkörpers 12.62mm
(nur 22-polig verfügbar)

7-T** -Raster 7.62mm (nur 24 und 28 polig)

TR -gesickt

No. of contacts

06, 08, 14, 16, 18, 20, 22, 24, 28, 32, 40

Version

TT -Standard

T2* -width(B) of the Isobody 12.62mm
(only 22-poles available)

7-T** -pitch 7.62mm (only 24 and 28 poles)

TR -retentive legs