


# FAST RECOVERY DIODE 11A/100~200V/trr:35nsec

C10P10F C10P20F F10P10F F10P20F  
C10P10FR C10P20FR F10P10FR F10P20FR

## FEATURES

- Similar to TO-220AB Case
- Fully Mold Isolation (F-Type)
- Dual Diodes - Cathode Common and Anode Common (Type - R)
- Ultra - Fast Recovery
- Low Forward Voltage Drop
- High Surge Capability
- 100 Volts thru 600 Volts Types Available

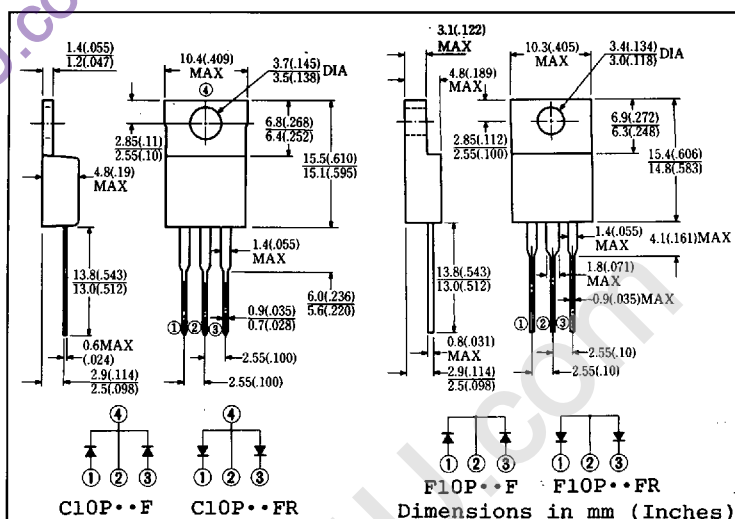

Approx. Net Weight: 1.9 Grams

1.75 Grams

## MAXIMUM RATINGS

Voltage Rating	TYPE Symbol	◆C10P10F ◆F10P10F ◆C10P10FR ◆F10P10FR	C10P20F F10P20F C10P20FR F10P20FR	Unit	
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	100	200	V	
Non-Repetitive Peak Reverse Voltage	V <sub>RSM</sub>	110	220	V	
Electrical Rating	Symbol	Condition		Rating	Unit
Average Rectified Output Current	I <sub>O</sub>	Full rectangular wave conduction T <sub>C</sub> = 112°C		11	A
		Full sinusoidal wave conduction T <sub>C</sub> = 117°C		10	
RMS Forward Current	I <sub>F(RMS)</sub>			11	A
Peak One-cycle Forward Surge Current	I <sub>FSM</sub>	50Hz full sine wave, non-repetitive		80	A
Operating Junction Temperature Range	T <sub>jw</sub>			-40 to 150	°C
Storage Temperature Range	T <sub>stg</sub>			-40 to 150	°C
Mounting Torque	F <sub>tor</sub>	Recommended torque		0.5 (5.1)	N•m (kgf•cm)

## ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition	Max.	Unit
Peak Forward Voltage	$V_{FM}$	$I_{FM} = 5A$ $T_j = 25^\circ\text{C}$ per diode leg	0.98	v
Peak Reverse Current	$I_{RM}$	$V_{RM} = V_{RRM}$ $T_j = 25^\circ\text{C}$ per diode leg	20	$\mu\text{A}$
Reverse Recovery Time	$t_{rr}$	$I_{FM} = 5A$ $-di/dt = 50A/\mu\text{s}$ $T_j = 25^\circ\text{C}$	35	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	3	$^\circ\text{C/W}$
	$R_{th(c-f)}$	Case to Fin for F10P type	1.5	

◆ For spare parts only

6615123 0002253 8T5

