

# Technical Information

CK1047

COLD CATHODE  
HALF-WAVE RECTIFIER

The CK1047 is a ruggedized, instant starting, cold cathode, gas-filled, half-wave rectifier of miniature construction suitable for high voltage, low current power supplies up to 12 mAdc output. Several tubes can be operated in cascade to produce very high voltages. The CK1047 is designed for use in high vibration environmental conditions such as found in mobile and aircraft equipments.

www.DataSheet4U.com

MECHANICAL RATINGS: (Absolute Maximum)

|                                                               |              |
|---------------------------------------------------------------|--------------|
| Fatigue (Vibrational Acceleration for Extended Periods) ..... | 35G          |
| Bulb Temperature .....                                        | -55 to +90°C |
| Altitude .....                                                | 10,000 Ft.   |

**ELECTRICAL DATA**RATINGS: (Absolute Maximum Values)

|                                                 |           |
|-------------------------------------------------|-----------|
| Peak Inverse Voltage .....                      | 2800 v    |
| Plate Supply Voltage (Minimum) .....            | 500 Vac   |
| Peak Plate Current (Steady State) .....         | 100 ma    |
| Output Current .....                            | 12 mAdc   |
| Peak Surge Current .....                        | 300 ma    |
| Plate Circuit Impedance (Minimum, Note A) ..... | 6000 ohms |

CHARACTERISTICS AND TYPICAL OPERATION

60~ Half Wave Rectifier

|                                       |             |
|---------------------------------------|-------------|
| Plate Supply Voltage .....            | 1200 Vac    |
| Plate Supply Impedance .....          | 7500 ohms   |
| Load Current .....                    | 12 mAdc     |
| Load Resistor .....                   | 90,000 ohms |
| Load Capacitor .....                  | 2.0 $\mu$ f |
| Anode to Cathode Drop (Approx.) ..... | 100 Vdc     |



APPLICATION NOTES

NOTE A: To avoid damage to the equipment or tube, it is recommended that the anode supply impedance be adjusted to limit forward currents and intermittent reverse peak currents to stated values. Typical resistance is 7500 ohms minus the effective equivalent transformers loss, but never less than 2000 ohms dc resistance. For voltage multiplier circuits, a separate limiting resistor should be connected in series with the anode or cathode of each tube. In the event of a reverse arc, the absence of a surge limiting resistor causes all of the energy of the filter condensor to be dissipated in the tube.

CAUTION: To Electronic Equipment Design Engineers: Special attention should be given to the temperature at which the tubes are to be operated. Reliability will be seriously impaired if maximum bulb temperature is exceeded. The life expectancy may be reduced if conditions other than those specified for life test are imposed on the tube and will be reduced appreciably if absolute maximum ratings are exceeded.

**MECHANICAL DATA**

ENVELOPE ..... T-5½  
 BASE ..... 7 Pin Miniature  
 (with cut pins)  
 CATHODE ..... Glow Discharge  
 MOUNTING POSITION ..... Any

**PHYSICAL DIMENSIONS****BASING**

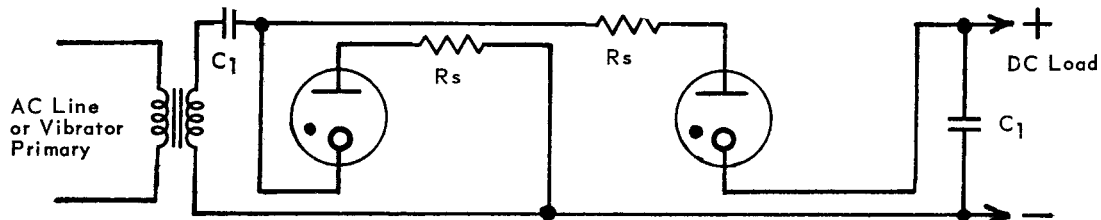
BOTTOM VIEW

TERMINAL CONNECTIONS:

|       |         |
|-------|---------|
| Pin 1 | Cathode |
| Pin 2 | Cathode |
| Pin 3 | Cathode |
| Pin 4 | Cathode |
| Pin 5 | Cathode |
| Pin 6 | Cathode |
| Pin 7 | Cathode |
| Cap   | Anode   |

## CK1047

## COLD CATHODE HALF-WAVE RECTIFIER

VOLTAGE DOUBLER HIGH VOLTAGE POWER SUPPLY  
TYPICAL CIRCUIT FOR AC LINE OR BATTERY OPERATION

$R_s$  = Surge Resistor. Adjust to keep Peak Cathode Current (steady state) and Peak Cathode Current (surge) within ratings of 100 ma. and 300 ma., respectively.  $R_s$  should not be less than 2000 ohms in voltage doubler circuits regardless of transformer characteristics.

$C_1$  = 1.0  $\mu$ f, (Typical for 60 cycle operation).

