

CX-400 SERIES

www.DataSheet4U.com

■ General terms and conditions..... P.1

■ Sensor selection guide.....P.11~ / P.229~

Related Information

■ MS-AJ / CHX-SC2.....P.799 / P.800

■ Glossary of terms / General precautions.....P.983~ / P.986~

■ Korea's S-mark..... P.1034~

SUNX website <http://www.sunx.com>

World standard photoelectric sensors Full line up 116 models!

Wide variety of 116 models

You can find your desired sensors among the **CX-400** series because of their high basic performance, superior cost performance, and wide variation of types.


Type	Sensing range
Thru-beam (long sensing range)	15 m 49.213 ft
Thru-beam	10 m 32.808 ft
Retroreflective (long sensing range)	5 m 16.404 ft
Retroreflective (with polarizing filters)	3 m 9.843 ft
Retroreflective (for transparent object sensing)	0.1 to 2 m 0.328 in 6.562 in
Retroreflective (for transparent object sensing)	50 to 500 mm 1.969 to 19.685 in
Diffuse reflective (800 mm 9.843 in type)	800 mm 9.843 in
Diffuse reflective (300 mm 11.811 in type)	300 mm 11.811 in
Diffuse reflective (100 mm 3.937 in type)	100 mm 3.937 in
Diffuse reflective (narrow-view type)	70 to 200 mm 2.756 to 7.874 in
Adjustable range reflective	20 to 300 mm 0.787 to 11.811 in
Adjustable range reflective	15 to 100 mm 0.591 to 3.937 in
Adjustable range reflective	2 to 50 mm 0.079 to 1.969 in
Adjustable range reflective (small spot)	2 to 50 mm 0.079 to 1.969 in

Output	NPN, PNP
Connecting method (Note 1)	Cable type, M8 Plug-in connector type, M12 Pigtailed type
Cable length of cable type (Note 2)	0.5 m 1.640 ft, 2 m 6.562 ft, 5 m 16.404 ft

Notes: 1) The adjustable range reflective type includes the cable type and M8 connector type only.
2) The adjustable range reflective type includes the 2 m 6.562 ft cable type (standard) only.


Strong against oil and coolant liquids **CX-41□/42□/49□**

The lens material for the thru-beam type, retroreflective type (excluding the **CX-48□**) and the diffuse reflective type are made of a strong acrylic that resists the harmful effects of coolants. These sensors can be used with confidence even around metal processing machinery that disperses oil mists. The protection mechanism also conforms to IP67 (IEC).



Strong against ethanol **CX-44□/48□**


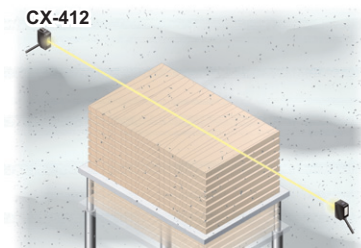


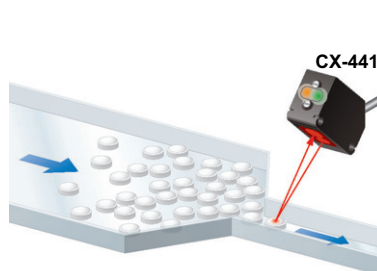
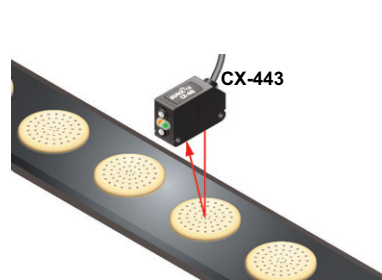
A strong, ethanol resistant polycarbonate was used for the front and display covers. Safe even for installing near food processing machinery that disperses ethanol based detergents. The protection mechanism also conforms to IP67 (IEC).



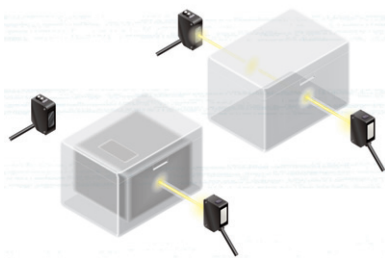
Caution: Set the **CX-48□** so that cleaning liquid will not get on to the attached reflector.

ORDER GUIDE
P.236~SPECIFICATIONS
P.240~I/O CIRCUIT DIAGRAMS
P.242SENSING CHARACTERISTICS
P.243~PRECAUTIONS FOR PROPER USE
P.248~DIMENSIONS
P.250~

www.DataSheet4U.com

APPLICATIONS**Detecting out of position tape feeder cassette****Detecting objects in places that have a lot of dust or clouds of particles****Passage confirmation of object on a conveyor belt****Detecting transparent glass bottles****Small tablet sensing****Biscuit sensing****BASIC PERFORMANCE****Strong infrared beam****CX-412**

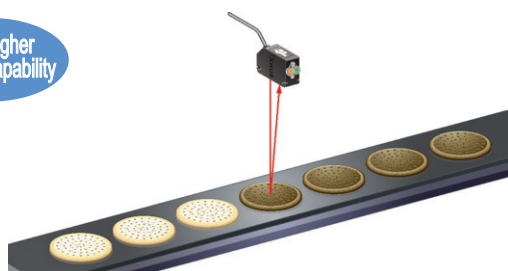
The longest in its class, it realizes a 15 m **49.213 ft** long-distance sensing range. Remarkable penetrating power enables applications such as package content detection. (Note)



Note: When sensing utilizing penetrating power, make sure to verify using the actual sensor.

Hardly affected by color**CX-441/443**

Both black and white objects can be sensed at the same distances. No adjuster control is needed, even when products of different colors are moving along the production line.

30 % higher sensing capability**Can sense differences as small as 0.4 mm **0.016 in**, with hysteresis of 2 % or less****CX-441/443**

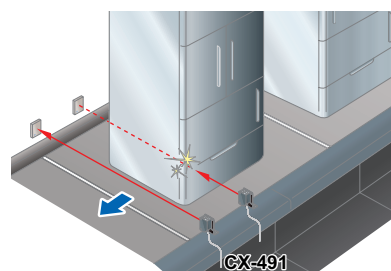
An advanced optical system provides sensing performance that is 2.5 times approx. than conventional models. Even ultra-small differences of 0.4 mm **0.016 in** can be detected accurately.

2.5 times the sensing capability!

Height differences of as little as 0.4 mm **0.016 in** can be detected at a setting distance of 20 mm **0.787 in**

**Retroreflective type with polarizing filters****CX-491**

Built-in polarizing filters ensure stable sensing even on a specular object.



FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

CX-400**EX-10****EX-20****EX-30****EX-40****EQ-30****EQ-500****MQ-W****RX-LS200****RX****CY****PX-2****RT-610**

Power Supply Built-in

NX5**VF**

Amplifier-separated

SU-7 / SH**SS-A5 / SH**

Other Products

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSSAFETY
COMPONENTSPRESSURE
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC CONTROL
DEVICESLASER
MARKERSSelection
GuideAmplifier
Built-in**CX-400**

EX-10

EX-20

EX-30

EX-40

EQ-30

EQ-500

MQ-W

RX-LS200

RX

CY

PX-2

RT-610

Power Supply
Built-in

NX5

VF

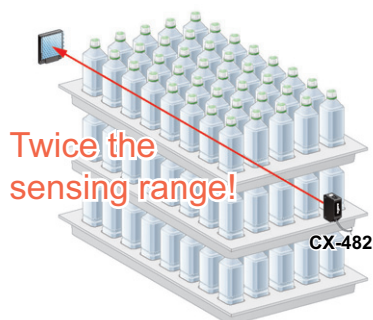
Amplifier-
separated

SU-7 / SH

SS-A5 / SH

Other
Products**BASIC PERFORMANCE****Introducing the transparent object sensing type sensor****CX-48□**

Our unique optical system and transparent object sensing circuitry provide stable sensing of even thinner transparent objects than the conventional models.



Transparent objects detectable with **CX-48□** (Typical examples)

Sensing object	Sensing object size (mm in)	
Glass sheet	□50 □1.969	t = 0.7 0.028
Cylindrical glass	ø50 ø1.969 ℓ = 50 1.969	t = 1.3 0.051
Acrylic board	□50 □1.969	t = 1.0 0.039
Styrol (Floppy case)	□50 □1.969	t = 0.9 0.035
Food wrapping film	□50 □1.969	t = 10 μm 0.394 mil
Cigarette case film	□50 □1.969	t = 20 μm 0.787 mil
Vinyl sack	□50 □1.969	t = 30 μm 1.181 mil
Pet bottle (500ml)	ø66 ø2.598	

Reflector setting range **CX-481**: 300 to 500 mm 11.811 to 19.685 in,

CX-482: 1 to 2 m 3.281 to 6.562 ft

[with the **RF-230** reflector at the optimum condition (Note)]

Each object should pass across the beam at the center between the sensor and the reflector.

ℓ: Length of cylindrical glasses

t: Thickness of sensing object


Note: The optimum condition is defined as the condition in which the sensitivity level is set such that the stability indicator just lights up when the object is absent.

Long sensing range of 5 m 16.404 ft CX-493

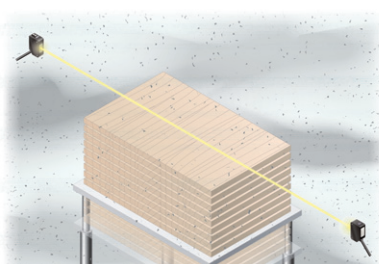
A long 5 m 16.404 ft sensing range is possible with the red LED type that is easy to align with the beam axis. Can be used for wide automatic door shutters.

**Less power consumed**

The **CX-400** series sensors achieve a maximum of approx. 55 % the power consumption of conventional sensors. Contributes to preserving the environment.

**ENVIRONMENTAL RESISTANCE****Strong on dust and dirt****CX-412**


Because the light source is an infrared light, it is strong on dust and dirt compared to the red beam type.

**Strong even in cold environments**

Stable performance can be maintained even in environments of -25 °C -13 °F.

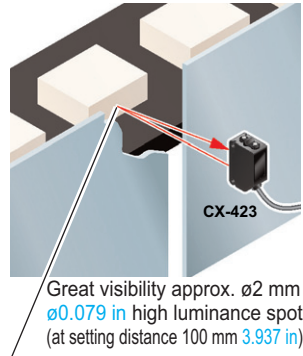
Strong against noise

Significantly stronger against inverter light and other extraneous light as well as high frequency and electromagnetic noise generated by high-pressure inverter motors and other devices.



MOUNTING**Beam axis alignment made easy with a high luminance spot beam CX-423**

These sensors realize a high luminance red LED spot that provides bright visibility enabling the sensing position to be checked at a glance. Because it has the smallest spot in its class, $\varnothing 2$ mm $\varnothing 0.079$ in approx., even the minutest object can be accurately detected.

**The bright spot makes beam axis alignment easy CX-441**

These sensors realize a high luminance red spot that provides bright visibility. The sensing position can be checked at a glance. Because the **CX-441** sensor has the smallest spot in its class $\varnothing 2$ mm $\varnothing 0.079$ in approx., even the minutest object can be accurately detected.

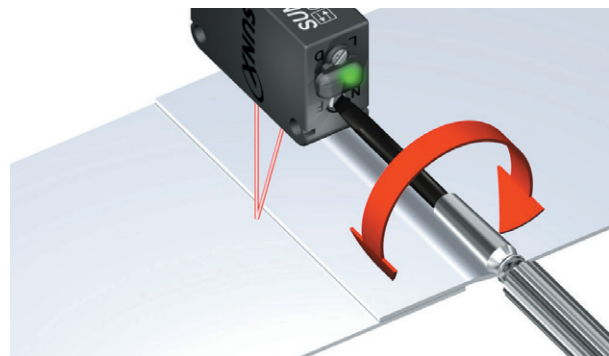
**OPERABILITY****Reduction of volume adjustment labor CX-42□**

Because these sensors possess many variations depending on the sensing range, enables you to make optimal volume adjustment easily.

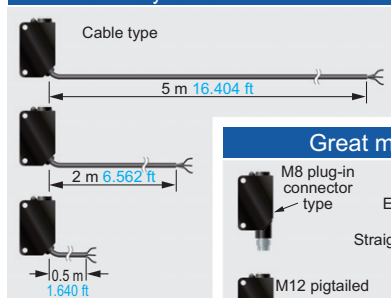
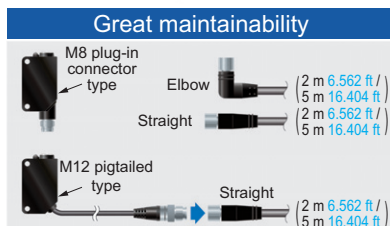
CX-422: 800 mm 31.496 in
CX-421: 300 mm 11.811 in
CX-424: 100 mm 3.937 in

**Can be used for sensing minute differences CX-44□**

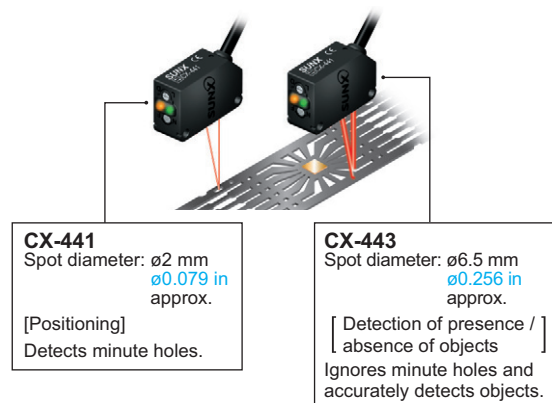
Equipped with a 5-turn adjuster so that even challenging range settings can be handled with ease.

**VARIETIES****Less processing**

M8 plug-in connector type and M12 pigtailed type are available. This contributes to less time spent in setting up. In addition, cable types are available with cable lengths of 0.5 m 1.640 ft, 2 m 6.562 ft and 5 m 16.404 ft. This results in less wastage.

No unnecessary cables or terminal blocks**Great maintainability****Select from 2 spot diameters as per the application CX-441/443**

Within the choice of 50 mm 1.969 in sensing range sensors, we offer small spot approx. $\varnothing 2$ mm $\varnothing 0.079$ in type optimal for detecting minute object and large approx. $\varnothing 6.5$ mm $\varnothing 0.256$ in spot type capable of sensing object covered with holes and grooves.



FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

CX-400**EX-10****EX-20****EX-30****EX-40****EQ-30****EQ-500****MQ-W****RX-LS200****RX****CY****PX-2****RT-610**

Power Supply Built-in

NX5**VF**

Amplifier-separated

SU-7 / SH**SS-A5 / SH**

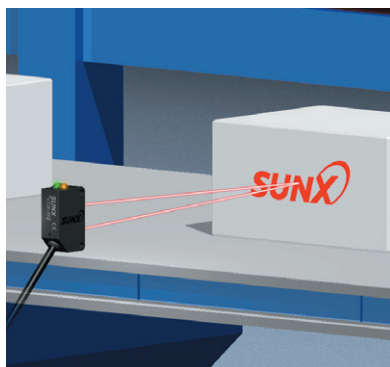
Other Products

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSSAFETY
COMPONENTSPRESSURE
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC CONTROL
DEVICESLASER
MARKERSSelection
GuideAmplifier
Built-in**CX-400****EX-10****EX-20****EX-30****EX-40****EQ-30****EQ-500****MQ-W****RX-LS200****RX****CY****PX-2****RT-610**Power Supply
Built-in**NX5****VF**Amplifier-
separated**SU-7 / SH****SS-A5 / SH**Other
Products**FUNCTIONS****BGS / FGS functions make even the most challenging settings possible!****CX-44□**


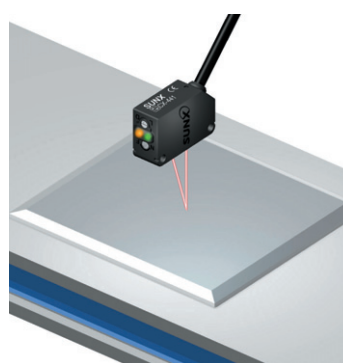
For details on the operation of the BGS / FGS functions, refer to p.249, “**BGS / FGS functions**” of “**PRECAUTIONS FOR PROPER USE**”.

The BGS function is best suited for the following case**Background not present**


When object and background are separated

BGS

Not affected if the background color changes or someone passes behind the conveyor.

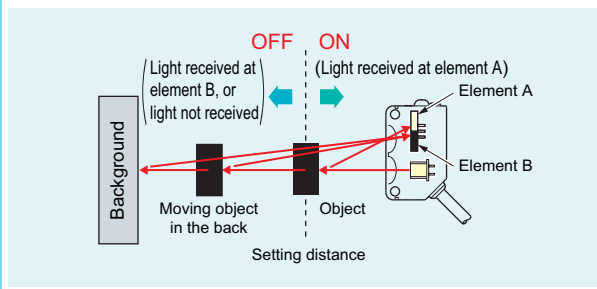
**The FGS function is best suited for the following case****Background present**When object and background are close together
When the object is glossy or uneven**FGS**

Unaffected by gloss, color or uneven surfaces when sensing objects present on a conveyor belt.

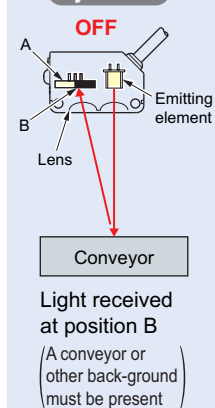
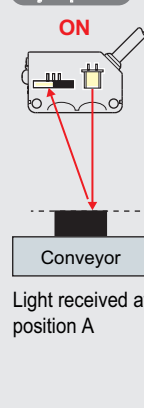
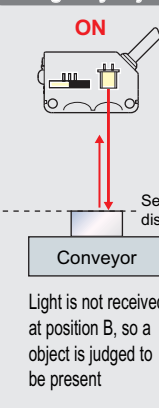
**BGS (Background suppression) function**

The sensor judges that an object is present when light is received at position A of the light-receiving element (2-segment element).



This is useful if the object and background are far apart. The distance adjustment method is the same as the conventional adjustment method for adjustable range reflective type sensors.

**FGS (Foreground suppression) function**

The sensor judges that an object is present when no light is received at position B of the light-receiving element (2-segment element). Accordingly, even objects that are glossy can be sensed. This is useful if the object and background are close together, or if the object being sensed is glossy.

OFF in this condition only**Object absent****ON in all other conditions****Object present****For glossy object****Strong against interference**





The interference prevention function lets two sensors to be mounted close together precisely.

**OTHERS****Less resources used**

Based on environmental considerations, simplified packaging is used in order to reduce waste. In addition, the bag is made from polyethylene which produces no toxic gases even when burned.




ORDER GUIDE

Type	Appearance	Sensing range	Model No. (Note 1)		Emitting element
			NPN output	PNP output	
Thru-beam		 10 m 32.808 ft	CX-411	CX-411-P	Red LED
		 15 m 49.213 ft	CX-412	CX-412-P	Infrared LED
Retroreflective		 3 m 9.843 ft (Note 2)	CX-491	CX-491-P	Red LED
		 5 m 16.404 ft (Note 2)	CX-493	CX-493-P	
		 50 to 500 mm 1.969 to 19.685 in (Note 2)	CX-481	CX-481-P	Infrared LED
		 0.1 to 2 m 0.328 to 6.562 ft (Note 2)	CX-482	CX-482-P	
Diffuse reflective		 100 mm 3.937 in	CX-424	CX-424-P	Infrared LED
		 300 mm 11.811 in	CX-421	CX-421-P	
		 800 mm 31.496 in	CX-422	CX-422-P	
		 70 to 200 mm 2.756 to 7.874 in	CX-423	CX-423-P	Red LED
Adjustable range reflective		 20 mm	CX-441	CX-441-P	Red LED
		 2 to 50 mm 0.079 to 1.969 in	CX-443	CX-443-P	
		 15 to 100 mm 0.591 to 3.937 in	CX-444	CX-444-P	
		 20 to 300 mm 0.787 to 11.811 in	CX-442	CX-442-P	

NOTE: Mounting bracket is not supplied with the sensor. Please select from the range of optional sensor mounting brackets.

Notes: 1) The model No. with suffix "E" shown on the label affixed to the thru-beam type sensor is the emitter, "D" shown on the label is the receiver.
(e.g.) Emitter of **CX-411**: **CX-411E**, Receiver of **CX-411**: **CX-411D**

2) The sensing range of the retroreflective type sensor is specified for the **RF-230** reflector. The sensing range represents the actual sensing range of the sensor. The sensing ranges itemized in "A" of the table below may vary depending on the shape of sensing object. Be sure to check the operation with the actual sensing object.



	CX-491□	CX-493□	CX-481□	CX-482□
A	0 to 3 m 0 to 9.843 ft	0 to 5 m 0 to 16.404 ft	50 to 500 mm 1.969 to 19.685 in	0.1 to 2 m 0.328 to 6.562 ft
B	0.1 to 3 m 0.328 to 9.843 ft	0.1 to 5 m 0.328 to 16.404 ft	100 to 500 mm 3.937 to 19.685 in	0.8 to 2 m 2.625 to 6.562 ft

ORDER GUIDE

0.5 m 1.640 ft / 5 m 16.404 ft cable length types

0.5 m 1.640 ft / 5 m 16.404 ft cable length types (standard: 2 m 6.562 ft) are also available.

When ordering this type, suffix "-C05" for the 0.5 m 1.640 ft cable length type, "-C5" for the 5 m 16.404 ft cable length type to the model No. (Please note that 0.5 m 1.640 ft cable length type and 5 m 16.404 ft cable length type are not available for CX-44□.)

(e.g.) 0.5m 1.640 ft cable length type of CX-411-P is "CX-411-P-C05"

5 m 16.404 ft cable length type of CX-411-P is "CX-411-P-C5"

M8 plug-in connector type, M12 pigtailed type

M8 plug-in connector type and M12 pigtailed type are also available.

When ordering this type, suffix "-Z" for the M8 connector type, "-J" for the M12 pigtailed type to the model No. (Please note that M12 pigtailed type is not available for CX-44□.)

(e.g.) M8 connector type of CX-411-P is "CX-411-P-Z"

M12 pigtailed type of CX-411-P is "CX-411-P-J"

• Mating cable (2 cables are required for the thru-beam type.)

Type		Model No.	Cable length	Description
For M8 plug-in connector type	Straight	CN-24A-C2	2 m 6.562 ft	Can be used with all models
		CN-24A-C5	5 m 16.404 ft	
	Elbow	CN-24AL-C2	2 m 6.562 ft	
		CN-24AL-C5	5 m 16.404 ft	
For M12 pigtailed type	2-core	CN-22-C2	2 m 6.562 ft	For thru-beam type emitter (2-core)
		CN-22-C5	5 m 16.404 ft	
	4-core	CN-24-C2	2 m 6.562 ft	Can be used with all models
		CN-24-C5	5 m 16.404 ft	

Package without reflector

NPN output type: CX-491-Y

PNP output type: CX-491-P-Y


Accessory

• RF-230 (Reflector)




Mating cable


• CN-24A-C2 CN-24A-C5



• CN-24AL-C2 CN-24AL-C5



• CN-22-C2, CN-22-C5 CN-24-C2, CN-24-C5




OPTIONS

Designation	Model No.		Slit size	Sensing range		Min. sensing object	
	Slit	Sensor		Slit on one side	Slit on both sides	Slit on one side	Slit on both sides
Round slit mask (For thru-beam type sensor only)	OS-CX-05	CX-411 □	ø0.5 mm ø0.020 in	400 mm 15.748 in	20 mm 0.787 in	ø12 mm ø0.472 in	ø0.5 mm ø0.020 in
		CX-412 □		600 mm 23.622 in	30 mm 1.181 in		
	OS-CX-1	CX-411 □	ø1 mm ø0.039 in	900 mm 35.433 in	100 mm 3.937 in	ø12 mm ø0.472 in	ø1 mm ø0.039 in
		CX-412 □		1.35 m 4.429 ft	150 mm 5.906 in		
	OS-CX-2	CX-411 □	ø2 mm ø0.079 in	2 m 6.562 ft	400 mm 15.748 in	ø12 mm ø0.472 in	ø2 mm ø0.079 in
		CX-412 □		3 m 9.843 ft	600 mm 23.622 in		
Rectangular slit mask (For thru-beam type sensor only)	OS-CX-05×6	CX-411 □	0.5 × 6 mm 0.020 × 0.236 in	2 m 6.562 ft	400 mm 15.748 in	ø12 mm ø0.472 in	0.5 × 6 mm 0.020 × 0.236 in
		CX-412 □		3 m 9.843 ft	600 mm 23.622 in		
	OS-CX-1×6	CX-411 □	1 × 6 mm 0.039 × 0.236 in	3 m 9.843 ft	1 m 3.281 ft	ø12 mm ø0.472 in	1 × 6 mm 0.039 × 0.236 in
		CX-412 □		4.5 m 14.764 ft	1.5 m 4.921 ft		
	OS-CX-2×6	CX-411 □	2 × 6 mm 0.079 × 0.236 in	5 m 16.404 ft	2 m 6.562 ft	ø12 mm ø0.472 in	2 × 6 mm 0.079 × 0.236 in
		CX-412 □		7.5 m 24.606 ft	3 m 9.843 ft		

Designation	Model No.	Sensing range	Min. sensing object
Interference prevention filter (For CX-441□ only)	PF-CX4-V (Vertical) 2 pcs. per set	5 m 16.404 ft (Note 1)	ø12 mm ø0.472 in (Note 1)
	PF-CX4-H (Horizontal) 2 pcs. per set	5 m 16.404 ft (Note 1)	ø12 mm ø0.472 in (Note 1)
Reflector (For retroreflective type sensor only)	RF-210	CX-491 □	1 m 3.281 ft (Note 2)
		CX-493 □	1.5 m 4.921 ft (Note 2)
		CX-481 □	—
		CX-482 □	0.1 to 0.6 m 0.328 to 1.969 ft (Note 2)
	RF-220	CX-491 □	1.5 m 4.921 ft (Note 2)
		CX-493 □	3 m 9.843 ft (Note 2)
		CX-481 □	50 to 300 mm 1.969 to 11.811 in (Note 2)
		CX-482 □	0.1 to 1.3 m 0.328 to 4.265 ft (Note 2)

Notes: 1) Value when attached to both sides.

- 2) Set the distance between the **CX-491**□/**493**□ and the reflector to 0.1 m 0.328 ft or more. However, see the table below for **CX-48**□. The sensing range "A" may vary depending on the shape of sensing object. Be sure to check the operation with the actual sensing object.




Model No.		A	B
Sensor	Reflector		
CX-481 □	RF-220	50 to 300 mm 1.969 to 11.811 in	100 to 300 mm 3.937 to 11.811 in
		0.1 to 1.3 m 0.328 to 4.265 ft	0.5 to 1.3 m 1.640 to 4.265 ft
CX-482 □	RF-220	0.1 to 1.3 m 0.328 to 4.265 ft	0.5 to 1.3 m 1.640 to 4.265 ft
	RF-210	0.1 to 0.6 m 0.328 to 1.969 ft	0.3 to 0.6 m 0.984 to 1.969 ft

Round slit mask

• OS-CX-□


Fitted on the front face of the sensor with one-touch.



Rectangular slit mask

• OS-CX-□×6

Fitted on the front face of the sensor with one-touch.




Interference prevention filter

• PF-CX4-V

• PF-CX4-H

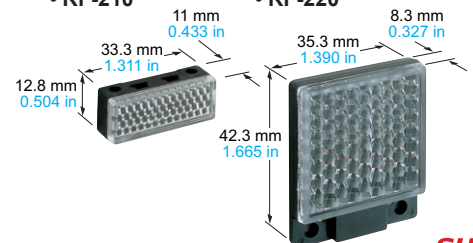
Two sets of **CX-441**□ can be mounted close together.



Reflector

• RF-210

• RF-220



FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE- SAVING SYSTEMS

MEASURE- MENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

CX-400

EX-10

EX-20

EX-30

EX-40

EQ-30

EQ-500

MQ-W

RX-LS200

RX

CY

PX-2

RT-610

Power Supply Built-in

NX5

VF

Amplifier-separated

SU-7 / SH

SS-A5 / SH

Other Products


OPTIONS

Designation	Model No.	Description
Reflector mounting bracket	MS-RF21-1	Protective mounting bracket for RF-210 It protects the reflector from damage and maintains alignment.
	MS-RF22	For RF-220
	MS-RF23	For RF-230
Reflective tape	RF-11	- Sensing range (Note 4): 0.5 m 1.640 ft [CX-491□] 0.8 m 2.625 ft [CX-493□] - Ambient temperature: -25 to +50 °C -13 to +122 °F - Ambient humidity: 35 to 85 % RH
	RF-12	- Sensing range (Note 4): 0.7 m 2.297 ft [CX-491□] 1.2 m 3.937 ft [CX-493□] 0.1 to 0.6 m 0.328 to 1.969 ft [CX-482□] Notes - Keep the tape free from stress. If it is pressed too much, its capability may deteriorate. - Do not cut the tape. It will deteriorate the sensing performance.
	RF-13	- Sensing range (Note 4): 0.5 m 1.640 ft [CX-491□] 0.8 m 2.625 ft [CX-493□] - Ambient temperature: -25 to +55 °C -13 to +131 °F - Ambient humidity: 35 to 85 % RH
Sensor mounting bracket (Note 1)	MS-CX2-1	Foot angled mounting bracket It can also be used for mounting RF-210 .
	MS-CX2-2	Foot biangled mounting bracket It can also be used for mounting RF-210 .
	MS-CX2-4	Protective mounting bracket
	MS-CX2-5	Back biangled mounting bracket
	MS-CX-3	Back angled mounting bracket
Universal sensor mounting stand (Note 2)	MS-AJ1	Horizontal mounting type
	MS-AJ2	Vertical mounting type
	MS-AJ1-A	Horizontal mounting type
	MS-AJ2-A	Vertical mounting type
	MS-AJ1-M	Horizontal mounting type
	MS-AJ2-M	Vertical mounting type
Sensor checker (Note 3)	CHX-SC2	It is useful for beam alignment of thru-beam type sensors. The optimum receiver position is given by indicators, as well as an audio signal.

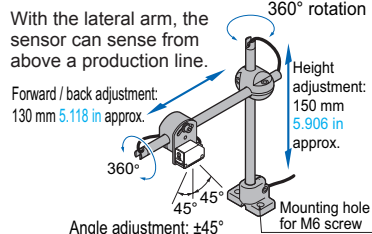
Notes: 1) The plug-in connector type sensor does not allow use of some sensor mounting brackets because of the protrusion of the connector.
 2) Refer to p.799 for details of the universal sensor mounting stand.
 3) Refer to p.800 for details of the sensor checker **CHX-SC2**.
 4) Set the distance between the sensor and the reflective tape to 0.1 m **0.328 ft (CX-482□)**: 0.4 m **1.312 ft** or more.

Universal sensor mounting stand


• MS-AJ1




• MS-AJ1-A



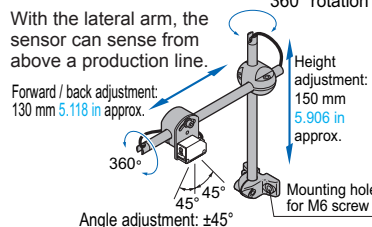
• MS-AJ1-M




• MS-AJ2



• MS-AJ2-A




• MS-AJ2-M




Reflector mounting bracket

• MS-RF21-1




Two M3 (length 12 mm **0.472 in**) screws with washers are attached.

• MS-RF22



Two M3 (length 8 mm **0.315 in**) screws with washers are attached.


• MS-RF23



Two M4 (length 10 mm **0.394 in**) screws with washers are attached.

Reflective tape


• RF-11



• RF-12




• RF-13




Sensor mounting bracket

• MS-CX2-1




Two M3 (length 12 mm **0.472 in**) screws with washers are attached.

• MS-CX2-2




Two M3 (length 12 mm **0.472 in**) screws with washers are attached.

• MS-CX2-4




Two M3 (length 14 mm **0.551 in**) screws with washers are attached.

• MS-CX2-5



Two M3 (length 12 mm **0.472 in**) screws with washers are attached.


• MS-CX-3



Two M3 (length 12 mm **0.472 in**) screws with washers are attached.

Sensor checker

• CHX-SC2




SPECIFICATIONS

Item	Model No.	Type	Thru-beam		Retroreflective				Diffuse reflective			
				Long sensing range	With polarizing filters	Long sensing range	For transparent object sensing					Narrow-view
		NPN output	CX-411	CX-412	CX-491	CX-493	CX-481	CX-482	CX-424	CX-421	CX-422	CX-423
		PNP output	CX-411-P	CX-412-P	CX-491-P	CX-493-P	CX-481-P	CX-482-P	CX-424-P	CX-421-P	CX-422-P	CX-423-P
Sensing range			10 m 32.808 ft	15 m 49.213 ft	3 m 9.843 ft (Note 2)	5 m 16.404 ft (Note 2)	50 to 500 mm 1.969 to 19.685 in (Note 2)	0.1 to 2 m 0.328 to 6.562 ft (Note 2)	100 mm 3.937 in (Note 3)	300 mm 11.811 in (Note 3)	800 mm 31.496 in (Note 3)	70 to 200 mm 2.756 to 7.874 in (Notes 3)
Sensing object			ø12 mm ø0.472 in or more opaque object (Note 4)		ø50 mm ø1.969 in or more opaque, translucent or specular object (Note 2, 5)	ø50 mm ø1.969 in or more opaque or translucent object (Note 2, 5)	ø50 mm ø1.969 in or more transparent, translucent or opaque object (Note 2, 5)		Opaque, translucent or transparent object (Note 5)			Opaque, translucent or transparent object (Note 5) (Min. sensing object: ø0.5 mm ø0.020 in copper wire)
Hysteresis									15 % or less of operation distance (Note 3)			
Repeatability (perpendicular to sensing axis)			0.5 mm 0.020 in or less						1 mm 0.039 in or less			0.5 mm 0.020 in or less
Supply voltage			12 to 24 V DC ± 10 % Ripple P-P 10 % or less									
Current consumption			Emitter: 20 mA or less Receiver: 20 mA or less	Emitter: 25 mA or less Receiver: 20 mA or less	20 mA or less			25 mA or less	25 mA or less			20 mA or less
Output			<NPN output type> NPN open-collector transistor • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 1 V or less (at 100 mA sink current) 0.4 V or less (at 16 mA sink current)					<PNP output type> PNP open-collector transistor • Maximum source current: 100 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 1 V or less (at 100 mA source current) 0.4 V or less (at 16 mA source current)				
			Output operation			Switchable either Light-ON or Dark-ON						
			Short-circuit protection			Incorporated						
Response time			1 ms or less									
Operation indicator			Orange LED (lights up when the output is ON) (incorporated on the receiver for thru-beam type)									
Stability indicator			Green LED (lights up under stable light received condition or stable dark condition) (incorporated on the receiver for thru-beam type)									
Power indicator			Green LED (lights up when the power is ON) (incorporated on the emitter)									
Sensitivity adjuster			Continuously variable adjuster (incorporated on the receiver for thru-beam type)									
Automatic interference prevention function			Two units of sensors can be mounted close together with interference prevention filters. (Sensing range: 5 m 16.404 ft)		Incorporated (Two units of sensors can be mounted close together.)							
Environmental resistance	Protection		IP67 (IEC) (Refer to p.984 for details of standards.)									
	Ambient temperature		– 25 to +55 °C –13 to +131 °F (No dew condensation or icing allowed), Storage: –30 to +70 °C –22 to +158 °F									
	Ambient humidity		35 to 85 % RH, Storage: 35 to 85 % RH									
	Ambient illuminance		Incandescent light: 3,000 lx at the light-receiving face									
	EMC		EN 60947-5-2									
	Voltage withstandability		1,000 V AC for one min. between all supply terminals connected together and enclosure									
	Insulation resistance		20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure									
	Vibration resistance		10 to 500 Hz frequency, 1.5 mm 0.059 in amplitude (10 G max.) in X, Y and Z directions for two hours each									
	Shock resistance		500 m/s ² acceleration (50 G approx.) in X, Y and Z directions for three times each									
Emitting element (modulated)			Red LED	Infrared LED	Red LED		Infrared LED		Infrared LED		Red LED	
Peak emission wavelength			680 nm 0.027 mil	870 nm 0.034 mil	680 nm 0.027 mil	650 nm 0.026 mil	870 nm 0.034 mil		860 nm 0.034 mil		645 nm 0.025 mil	
Material			Enclosure: PBT (polybutylene terephthalate), Lens: acrylic (CX-48□: polycarbonate), Indicator cover: acrylic (CX-48□: polycarbonate)									
Cable			0.2 mm ² 3-core (thru-beam type emitter: 2-core) cabtyre cable, 2 m 6.562 ft long									
Cable extension			Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable (thru-beam type: both emitter and receiver).									
Weight	Net weight		Emitter: 45 g approx., Receiver: 50 g approx.				50 g approx.					
	Gross weight		100 g approx.				80 g approx.				60 g approx.	
Accessory							RF-230 (Reflector): 1 pc.					

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C +73.4 °F.

2) The sensing range and the sensing object of the retroreflective type sensor are specified for the RF-230 reflector. The sensing range represents the actual sensing range of the sensor. The sensing ranges itemized in "A" of the table below may vary depending on the shape of sensing object. Be sure to check the operation with the actual sensing object.



	CX-491□	CX-493□	CX-481□	CX-482□
A	0 to 3 m 0 to 9.843 ft	0 to 5 m 0 to 16.404 ft	50 to 500 mm 1.969 to 19.685 in	0.1 to 2 m 0.328 to 6.562 ft
B	0.1 to 3 m 0.328 to 9.843 ft	0.1 to 5 m 0.328 to 16.404 ft	100 to 500 mm 3.937 to 19.685 in	0.8 to 2 m 2.625 to 6.562 ft

3) The sensing range and the hysteresis of the diffuse reflective type sensor are specified for white non-glossy paper (200 × 200 mm 7.874 × 7.874 in) as the object.

4) If slit masks (optional) are fitted, an object of ø0.5 mm ø0.020 in (using round slit mask) can be detected.

5) Make sure to confirm detection with an actual sensor before use.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE- SAVING SYSTEMS

MEASURE- MENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

CX-400

EX-10

EX-20

EX-30

EX-40

EQ-30

EQ-500

MQ-W

RX-LS200

RX

CY

PX-2

RT-610

Power Supply Built-in

NX5

VF

Amplifier-separated

SU-7 / SH


SS-A5 / SH

Other Products

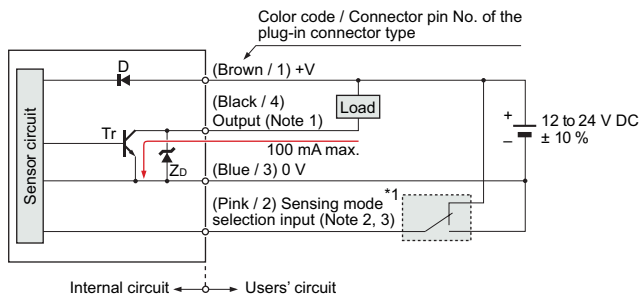
SPECIFICATIONS

		Type	Adjustable range reflective					
			Small spot					
Item	Model No.	NPN output	CX-441	CX-443	CX-444	CX-442		
		PNP output	CX-441-P	CX-443-P	CX-444-P	CX-442-P		
Adjustable range (Note 2)			20 to 50 mm 0.787 to 1.969 in		20 to 100 mm 0.787 to 3.937 in	40 to 300 mm 1.575 to 11.811 in		
Sensing range (with white non-glossy paper)			2 to 50 mm 0.079 to 1.969 in		15 to 100 mm 0.591 to 3.937 in	20 to 300 mm 0.787 to 11.811 in		
Hysteresis			2 % or less of operation distance (with white non-glossy paper)			5 % or less of operation distance (with white non-glossy paper)		
Repeatability			Along sensing axis: 1 mm 0.039 in or less, Perpendicular to sensing axis: 0.2 mm 0.008 in or less (with white non-glossy paper)					
Supply voltage			12 to 24 V DC ± 10 % Ripple P-P 10 % or less					
Current consumption			25 mA or less					
Output			<NPN output type> NPN open-collector transistor • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 1 V or less (at 100 mA sink current) 0.4 V or less (at 16 mA sink current)		<PNP output type> PNP open-collector transistor • Maximum source current: 100 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 1 V or less (at 100 mA source current) 0.4 V or less (at 16 mA source current)			
			Output operation				Switchable either Detection-ON or Detection-OFF	
			Short-circuit protection				Incorporated	
Response time			1 ms or less					
Operation indicator			Orange LED (lights up when the output is ON)					
Stability indicator			Green LED (lights up under stable operating condition)					
Distance adjuster			5-turn mechanical adjuster					
Sensing mode			BGS / FGS functions Switchable with wiring of sensing mode selection input					
Automatic interference prevention function (Note 3)			Incorporated					
Environmental resistance	Protection		IP67 (IEC) (Refer to p.984 for details of standards.)					
	Ambient temperature		−25 to +55 °C −13 to +131 °F (No dew condensation or icing allowed), Storage: −30 to +70 °C −22 to +158 °F					
	Ambient humidity		35 to 85 % RH, Storage: 35 to 85 % RH					
	Ambient illuminance		Incandescent light: 3,000 lx at the light-receiving face					
	EMC		EN 60947-5-2					
	Voltage withstandability		1,000 V AC for one min. between all supply terminals connected together and enclosure					
	Insulation resistance		20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure					
	Vibration resistance		10 to 500 Hz frequency, 3 mm 0.118 in amplitude in X, Y and Z directions for two hours each					
Shock resistance			500 m/s ² acceleration (50 G approx.) in X, Y and Z directions for three times each					
Emitting element			Red LED (Peak emission wavelength: 680 nm 0.027 mil, modulated)					
Spot diameter			ø2 mm ø0.079 in approx. (at 50 mm 1.969 in distance)	ø6.5 mm ø0.256 in approx. (at 50 mm 1.969 in distance)	ø9 mm ø0.354 in approx. (at 100 mm 3.937 in distance)	□15 mm □0.591 in approx. (at 300 mm 11.811 in distance)		
Material			Enclosure: PBT (Polybutylene terephthalate), Front cover: Polycarbonate, Indicator cover: Polycarbonate					
Cable			0.2 mm ² 4-core cabtyre cable, 2 m 6.562 ft long					
Cable extension			Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable.					
Weight			Net weight: 55 g approx., Gross weight: 80 g approx.					

- Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.
- 2) The adjustable range stands for the maximum sensing range which can be set with the distance adjuster. The sensor can detect an object 2 mm **0.079 in** [CX-444(-P)]: 15 mm **0.591 in**, CX-442(-P): 20 mm **0.787 in**], or more, away.
- 3) Note that detection may be unstable depending on the mounting conditions or the sensing object. In the state that this product is mounted, be sure to check the operation with the actual sensing object.



	CX-441□/443□	CX-444□	CX-442□
A	2 to 50 mm 0.079 to 1.969 in	15 to 100 mm 0.591 to 3.937 in	20 to 300 mm 0.787 to 11.811 in
B	20 to 50 mm 0.787 to 1.969 in	20 to 100 mm 0.787 to 3.937 in	40 to 300 mm 1.575 to 11.811 in

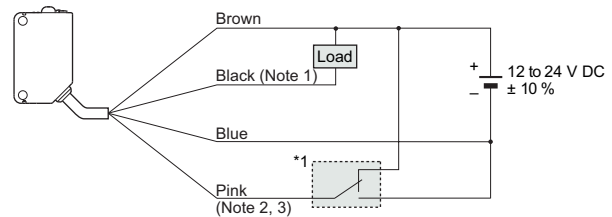
I/O CIRCUIT AND WIRING DIAGRAMS**NPN output type****I/O circuit diagram**

- Notes: 1) The emitter of the thru-beam type sensor does not incorporate the output.
 2) Sensing mode selection input is incorporated only for the **CX-44□** adjustable range reflective type. When using the **CX-44□**, be sure to wire the sensing mode selection input (pink / 2).
 3) When the mating cable is connected to the plug-in connector type of **CX-44□**, its color is white.

* 1

- Sensing mode selection input
BGS function: Connect to 0 V
FGS function: Connect to +V



Symbols ... D : Reverse supply polarity protection diode
 Zd : Surge absorption zener diode
 Tr : NPN output transistor

Wiring diagram

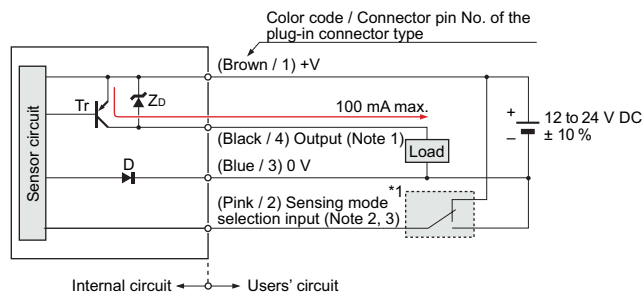
- Notes: 1) The emitter of the thru-beam type sensor does not incorporate the black wire.
 2) The pink wire is incorporated only for the **CX-44□** adjustable range reflective type. When using the **CX-44□**, be sure to wire the pink wire.
 3) When the mating cable is connected to the plug-in connector type of **CX-44□**, its color is white.

* 1

- Sensing mode selection input
BGS function: Connect to 0 V
FGS function: Connect to +V

Connector pin position**M8 plug-in connector type****M12 pigtailed type**

- Notes: 1) The emitter of the thru-beam type sensor does not incorporate the output.
 2) Sensing mode selection input is incorporated only for the **CX-44□** adjustable range reflective type. When using the **CX-44□**, be sure to wire the sensing mode selection input (pink / 2).

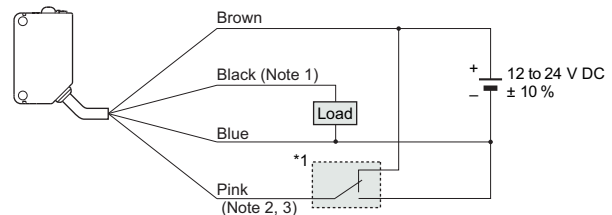
PNP output type**I/O circuit diagram**

- Notes: 1) The emitter of the thru-beam type sensor does not incorporate the output.
 2) Sensing mode selection input is incorporated only for the **CX-44□-P** adjustable range reflective type. When using the **CX-44□-P**, be sure to wire the sensing mode selection input (pink / 2).
 3) When the mating cable is connected to the plug-in connector type of **CX-44□-P**, its color is white.

* 1

- Sensing mode selection input
BGS function: Connect to 0 V
FGS function: Connect to +V



Symbols ... D : Reverse supply polarity protection diode
 Zd : Surge absorption zener diode
 Tr : PNP output transistor

Wiring diagram

- Notes: 1) The emitter of the thru-beam type sensor does not incorporate the black wire.
 2) The pink wire is incorporated only for the **CX-44□-P** adjustable range reflective type. When using the **CX-44□-P**, be sure to wire the pink wire.
 3) When the mating cable is connected to the plug-in connector type of **CX-44□-P**, its color is white.

* 1

- Sensing mode selection input
BGS function: Connect to 0 V
FGS function: Connect to +V

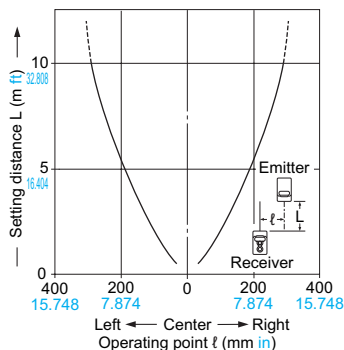

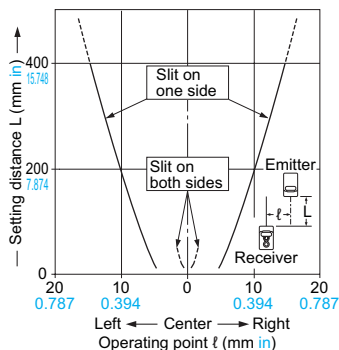
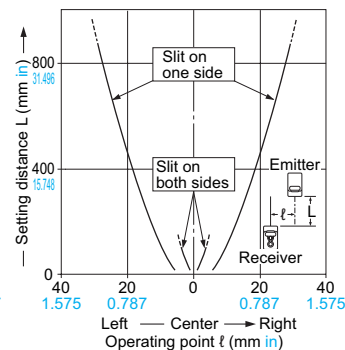
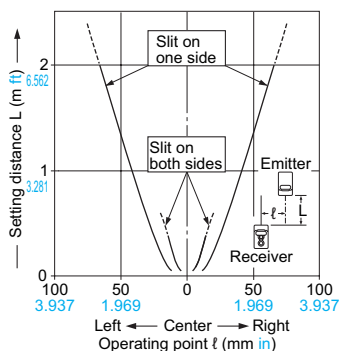
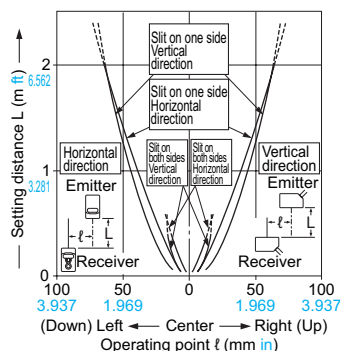
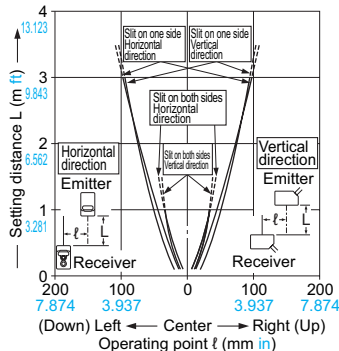
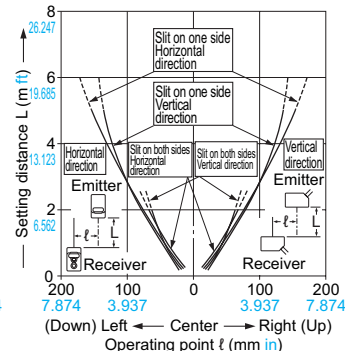
Connector pin position**M8 plug-in connector type****M12 pigtailed type**

- Notes: 1) The emitter of the thru-beam type sensor does not incorporate the output.
 2) Sensing mode selection input is incorporated only for the **CX-44□-P** adjustable range reflective type. When using the **CX-44□-P**, be sure to wire the sensing mode selection input (pink / 2).

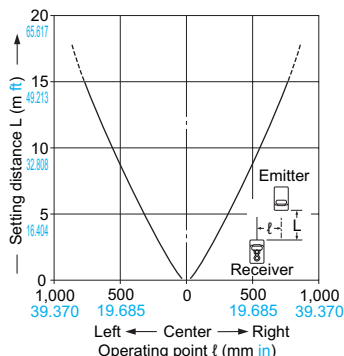

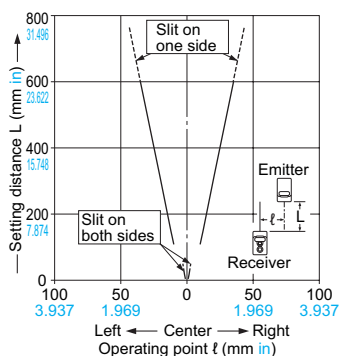
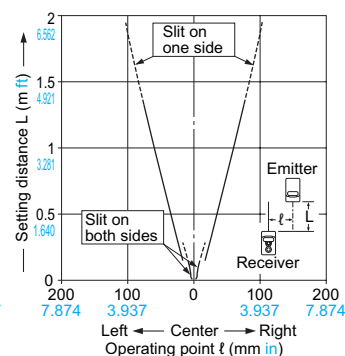
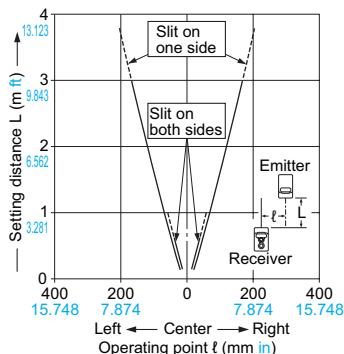
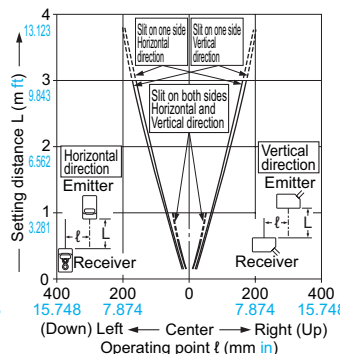
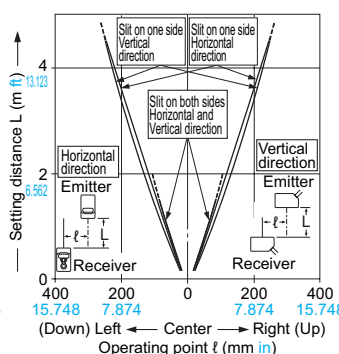
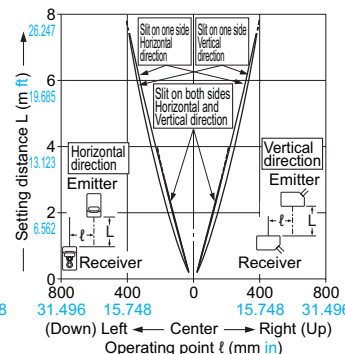
FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY
COMPONENTSPRESSURE
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSWIRE-
SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERSSelection
GuideAmplifier
Built-in**CX-400****EX-10****EX-20****EX-30****EX-40****EQ-30****EQ-500****MQ-W****RX-LS200****RX****CY****PX-2****RT-610**Power Supply
Built-in**NX5****VF**Amplifier-
separated**SU-7 / SH****SS-A5 / SH**Other
Products

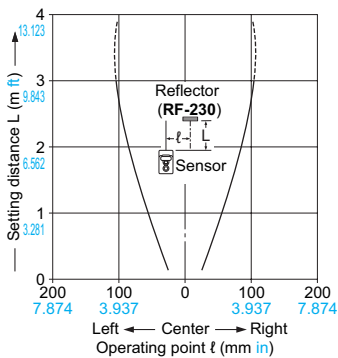
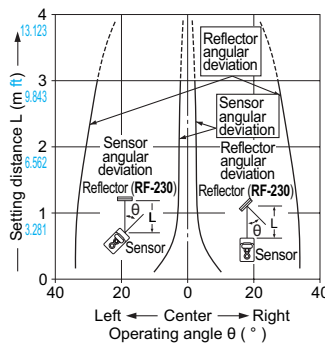
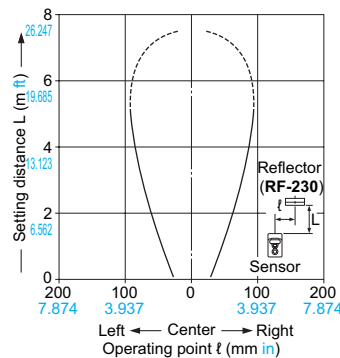
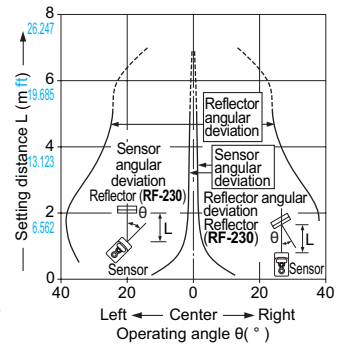
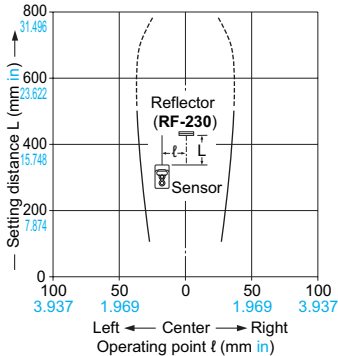

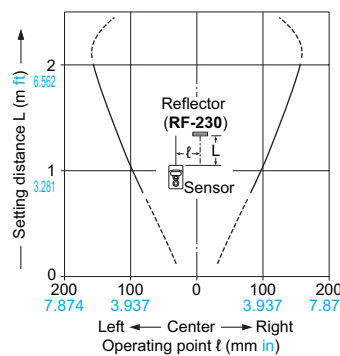

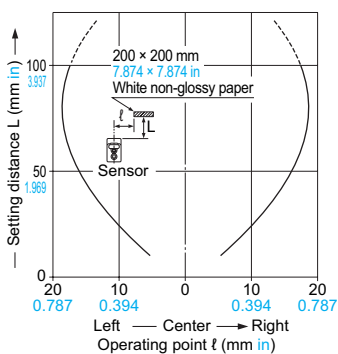
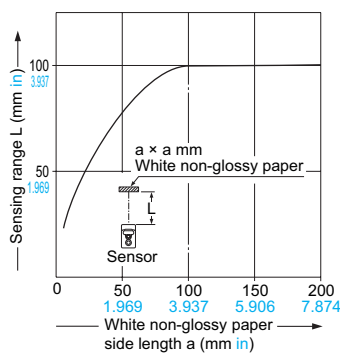
SENSING CHARACTERISTICS (TYPICAL)**CX-411□**

Thru-beam type

Parallel deviation**Angular deviation****Parallel deviation with round slit masks ($\phi 0.5$ mm $\phi 0.020$ in)****Parallel deviation with round slit masks ($\phi 1$ mm $\phi 0.039$ in)****Parallel deviation with round slit masks ($\phi 2$ mm $\phi 0.079$ in)****Parallel deviation with rectangular slit masks (0.5×6 mm 0.020×0.236 in)****Parallel deviation with rectangular slit masks (1×6 mm 0.039×0.236 in)****Parallel deviation with rectangular slit masks (2×6 mm 0.079×0.236 in)****CX-412□**

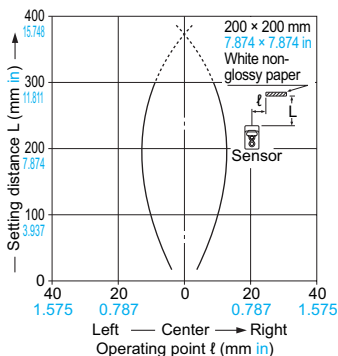
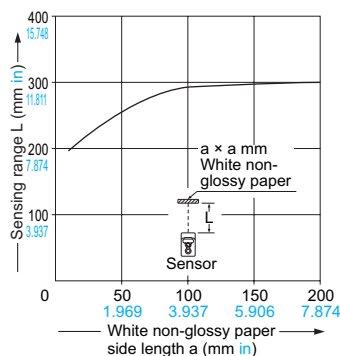
Thru-beam type

Parallel deviation**Angular deviation****Parallel deviation with round slit masks ($\phi 0.5$ mm $\phi 0.020$ in)****Parallel deviation with round slit masks ($\phi 1$ mm $\phi 0.039$ in)****Parallel deviation with round slit masks ($\phi 2$ mm $\phi 0.079$ in)****Parallel deviation with rectangular slit masks (0.5×6 mm 0.020×0.236 in)****Parallel deviation with rectangular slit masks (1×6 mm 0.039×0.236 in)****Parallel deviation with rectangular slit masks (2×6 mm 0.079×0.236 in)**

SENSING CHARACTERISTICS (TYPICAL)**CX-491□****Retroreflective type****Parallel deviation****Angular deviation****CX-493□****Retroreflective type****Parallel deviation****Angular deviation****CX-481□****Retroreflective type****Parallel deviation****Angular deviation****CX-482□****Retroreflective type****Parallel deviation****Angular deviation****CX-424□****Diffuse reflective type****Sensing field****Correlation between sensing object size and sensing range**

As the sensing object size becomes smaller than the standard size (white non-glossy paper 200 × 200 mm 7.874 × 7.874 in), the sensing range shortens, as shown in the left graph.

(For plotting the left graph, the sensitivity has been set such that a 200 × 200 mm 7.874 × 7.874 in white non-glossy paper is just detectable at a distance of 100 mm 3.937 in.)

CX-421□**Diffuse reflective type****Sensing field****Correlation between sensing object size and sensing range**



As the sensing object size becomes smaller than the standard size (white non-glossy paper 200 × 200 mm 7.874 × 7.874 in), the sensing range shortens, as shown in the left graph.

(For plotting the left graph, the sensitivity has been set such that a 200 × 200 mm 7.874 × 7.874 in white non-glossy paper is just detectable at a distance of 300 mm 11.811 in.)

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY
COMPONENTSPRESSURE
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSWIRE-
SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERSSelection
GuideAmplifier
Built-in**CX-400****EX-10****EX-20****EX-30****EX-40****EQ-30****EQ-500****MQ-W****RX-LS200****RX****CY****PX-2****RT-610**Power Supply
Built-in**NX5****VF**Amplifier-
separated**SU-7 / SH****SS-A5 / SH**Other
Products

SENSING CHARACTERISTICS (TYPICAL)**CX-422□**

Diffuse reflective type

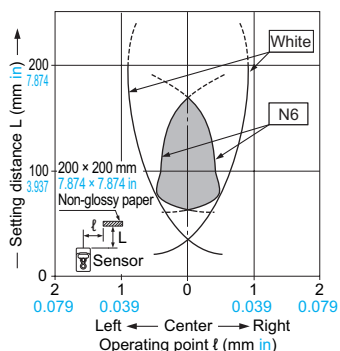
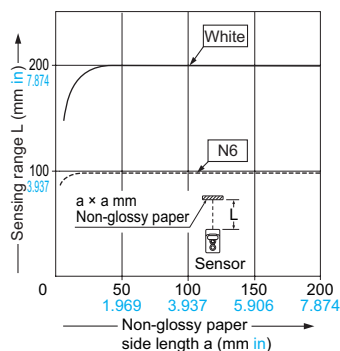
Sensing field**Correlation between sensing object size and sensing range**

As the sensing object size becomes smaller than the standard size (white non-glossy paper 200 × 200 mm 7.874 × 7.874 in), the sensing range shortens, as shown in the left graph.

(For plotting the left graph, the sensitivity has been set such that a 200 × 200 mm 7.874 × 7.874 in white non-glossy paper is just detectable at a distance of 800 mm 31.496 in.)

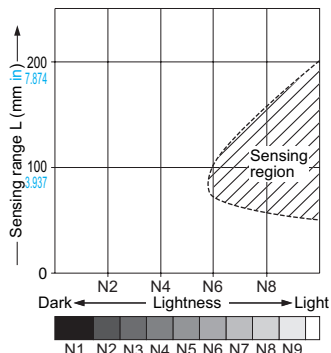
CX-423□

Diffuse reflective type

Sensing field**Correlation between sensing object size and sensing range**


As the sensing object size becomes smaller than the standard size (white non-glossy paper 200 × 200 mm 7.874 × 7.874 in), the sensing range shortens, as shown in the left graph.

(For plotting the left graph, the sensitivity has been set such that a 200 × 200 mm 7.874 × 7.874 in white non-glossy paper is just detectable at a distance of 200 mm 7.874 in.)

Correlation between lightness and sensing range

The sensing region is represented by oblique lines in the left figure. However, the sensitivity should be set with an enough margin because of slight variation in products.

(Lightness shown on the left may differ slightly from the actual object condition.)

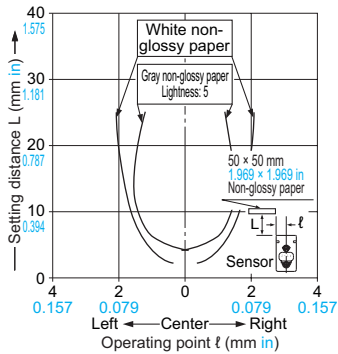
Emitted beam

SENSING CHARACTERISTICS (TYPICAL)**CX-441□**

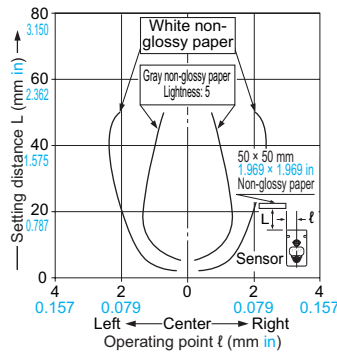


Adjustable range reflective type

Sensing fields

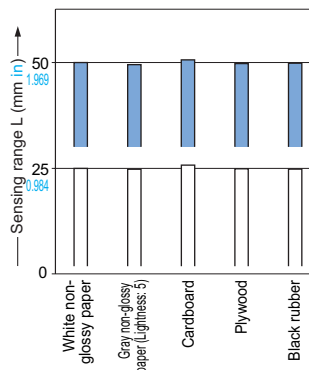
- Setting distance: 25 mm **0.984 in**



- Setting distance: 50 mm **1.969 in**

**Emitted beam****Correlation between color**(50 × 50 mm **1.969 × 1.969 in** construction paper) and sensing range

These bars indicate the sensing range with the respective colors when the distance adjuster is set to a sensing range of 50 mm **1.969 in** and 25 mm **0.984 in** long, respectively, with white color. The sensing range also varies depending on material.

Correlation between material(50 × 50 mm **1.969 × 1.969 in**) and sensing range

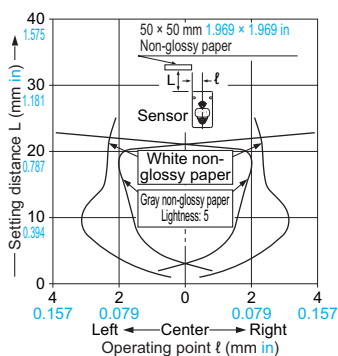
These bars indicate the sensing range with the respective objects when the distance adjuster is set to a sensing range of 50 mm **1.969 in** and 25 mm **0.984 in** long, respectively, with white non-glossy paper.

CX-443□

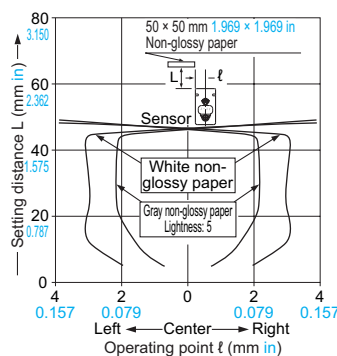


Adjustable range reflective type

Sensing fields

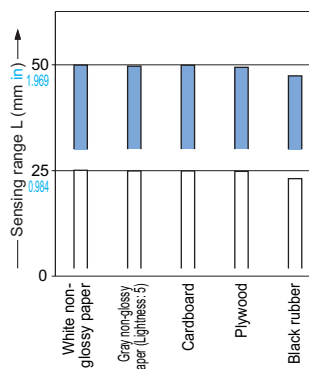
- Setting distance: 25 mm **0.984 in**



- Setting distance: 50 mm **1.969 in**

**Emitted beam****Correlation between color**(50 × 50 mm **1.969 × 1.969 in** construction paper) and sensing range

These bars indicate the sensing range with the respective colors when the distance adjuster is set to a sensing range of 50 mm **1.969 in** and 25 mm **0.984 in** long, respectively, with white color. The sensing range also varies depending on material.

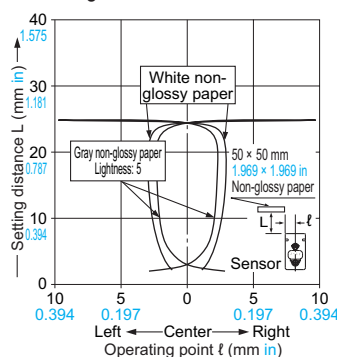
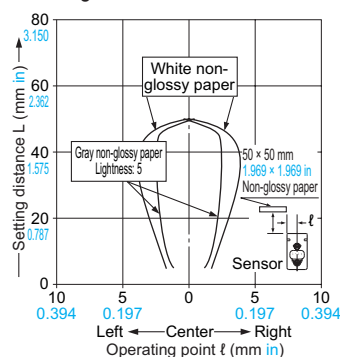
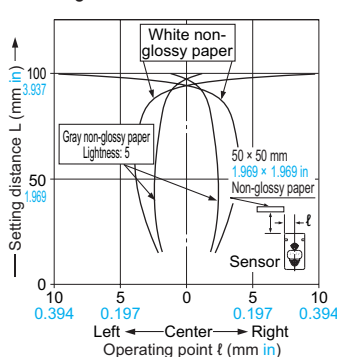

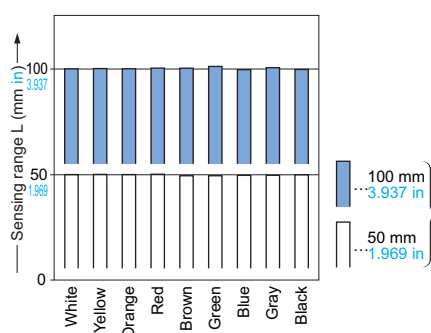
Correlation between material(50 × 50 mm **1.969 × 1.969 in**) and sensing range

These bars indicate the sensing range with the respective objects when the distance adjuster is set to a sensing range of 50 mm **1.969 in** and 25 mm **0.984 in** long, respectively, with white non-glossy paper.

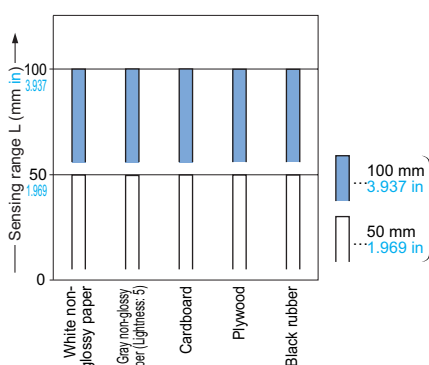
FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY
COMPONENTSPRESSURE
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSWIRE-
SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERSSelection
GuideAmplifier
Built-in**CX-400****EX-10****EX-20****EX-30****EX-40****EQ-30****EQ-500****MQ-W****RX-LS200****RX****CY****PX-2****RT-610**Power Supply
Built-in**NX5****VF**Amplifier-
separated**SU-7 / SH****SS-A5 / SH**Other
Products

SENSING CHARACTERISTICS (TYPICAL)**CX-444□**

Adjustable range reflective type

Sensing fields• Setting distance: 25 mm **0.984 in**• Setting distance: 50 mm **1.969 in**• Setting distance: 100 mm **3.937 in****Emitted beam****Correlation between color**(50 × 50 mm **1.969 × 1.969 in** construction paper) and sensing range

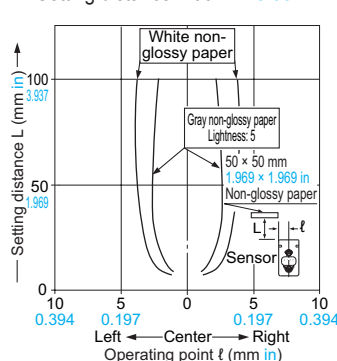
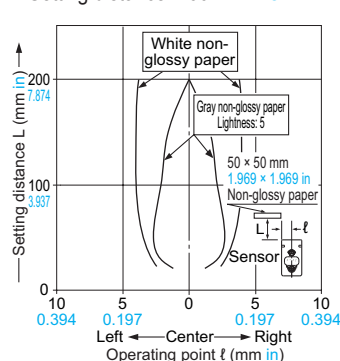
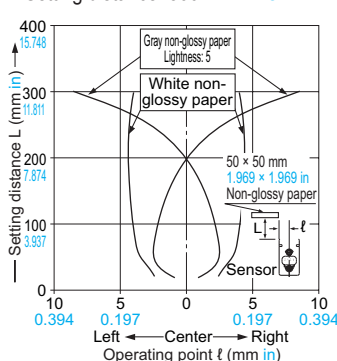

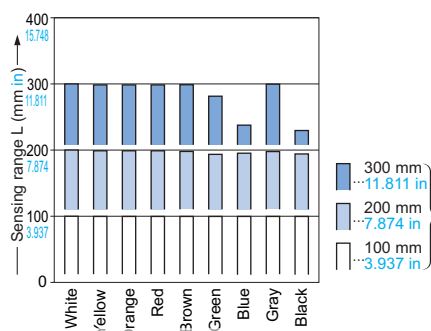
These bars indicate the sensing range with the respective colors when the distance adjuster is set to a sensing range of 100 mm **3.937 in** and 50 mm **1.969 in** long, respectively, with white color. The sensing range also varies depending on material.

Correlation between material(50 × 50 mm **1.969 × 1.969 in**) and sensing range

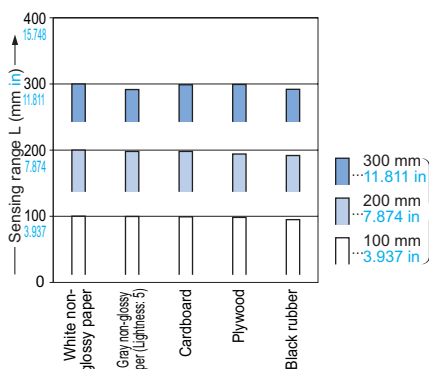
These bars indicate the sensing range with the respective objects when the distance adjuster is set to a sensing range of 100 mm **3.937 in** and 50 mm **1.969 in** long, respectively, with white non-glossy paper.

CX-442□

Adjustable range reflective type

Sensing fields• Setting distance: 100 mm **3.937 in**• Setting distance: 200 mm **7.874 in**• Setting distance: 300 mm **11.811 in****Emitted beam****Correlation between color**(50 × 50 mm **1.969 × 1.969 in** construction paper) and sensing range

These bars indicate the sensing range with the respective colors when the distance adjuster is set to a sensing range of 300 mm **11.811 in**, 200 mm **7.874 in** and 100 mm **3.937 in** long, respectively, with white color. The sensing range also varies depending on material.

Correlation between material(50 × 50 mm **1.969 × 1.969 in**) and sensing range

These bars indicate the sensing range with the respective objects when the distance adjuster is set to a sensing range of 300 mm **11.811 in**, 200 mm **7.874 in** and 100 mm **3.937 in** long, respectively, with white non-glossy paper.

PRECAUTIONS FOR PROPER USE

Refer to p.986~ for general precautions.


All models

- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

CX-49□ CX-48□**Retroreflective type sensor (excluding CX-491□)**

- Please take care of the following points when detecting materials having a gloss.

- ① Make L, shown in the diagram, sufficiently long.
- ② Install at an angle of 10 to 30 degrees to the sensing object.

**Retroreflective type sensor with polarizing filters (CX-491□)**

- If a shiny object is covered or wrapped with a transparent film, such as those described below, the retroreflective type sensor with polarizing filters may not be able to detect it. In that case, follow the steps given below.

Example of sensing objects




- Can wrapped by clear film
- Aluminum sheet covered by plastic film
- Gold or silver color (specular) label or wrapping paper

Steps

- Tilt the sensor with respect to the sensing object while fitting.
- Reduce the sensitivity.
- Increase the distance between the sensor and the sensing object.

CX-44□**Mounting**

- Care must be taken regarding the sensor mounting direction with respect to the object's direction of movement.

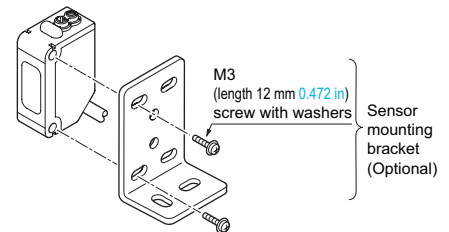
Correct**Correct****Incorrect**

Do not make the sensor detect an object in this direction because it may cause unstable operation.

- When detecting a specular object (aluminum or copper foil, etc.) or an object having a glossy surface or coating, please take care that there are cases when the object may not be detected due to a change in angle, wrinkles on the object surface, etc.

Mounting


- The tightening torque should be 0.5 N·m or less.

**Others**





- Do not use during the initial transient time (50 ms) after the power supply is switched on.

CX-48□**Retroreflective type sensor for transparent object sensing (CX-48□)**

- Optimum sensing is possible when the position of the transparent sensing object is set at the center of the sensor and the reflector. If the sensing position is set near the sensor or the reflector, the sensing may be unstable. In this case, set the sensing position at the center of the sensor and the reflector.



- When the sensor detects an uneven plastic receptacle or glass bottle, the received-light amount may differ with the sensing position or direction. Adjust the sensitivity after confirming the stable sensing condition by turning the sensing object, etc.
- When sensing pipe-shaped transparent sensing object, set it in a standing, not lying, position as shown in Figure A. The sensor may fail to detect a lying object as shown in Figure B.

Correct**Incorrect****Incorrect****Correct**

- When a specular body is present below the sensor, use the sensor by tilting it slightly upwards to avoid wrong operation.

- If a specular body is present in the background, wrong operation may be caused due to a small change in the angle of the background body. In that case, install the sensor at an inclination and confirm the operation with the actual sensing object.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE- SAVING SYSTEMS

MEASURE- MENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

CX-400**EX-10****EX-20****EX-30****EX-40****EQ-30****EQ-500****MQ-W****RX-S200****RX****CY****PX-2****RT-610**

Power Supply Built-in

NX5**VF**

Amplifier-separated

SU-7 / SH**SS-A5 / SH**

Other Products

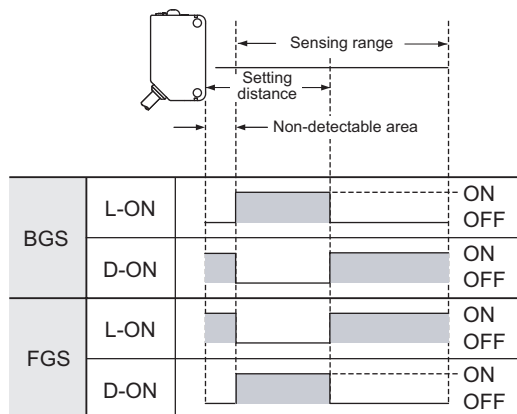
PRECAUTIONS FOR PROPER USE

Refer to p.986~ for general precautions.

CX-44□

Mounting

- Take care that there is a non-detectable area right in front of the sensor.
- Depending on whether you select the BGS or FGS function, the output operation changes as follows.




BGS / FGS functions

- This sensor incorporates BGS / FGS functions. Select either BGS or FGS function depending on the positions of the background and sensing object.


BGS function

- This function is used when the sensing object is apart from the background.



FGS function

- This function is used when the sensing object contacts the background or the sensing object is glossy, etc.



Distance adjustment



- When this product is used, be sure to carry out the distance adjustment.
- Since the distance adjuster of this sensor is a 5-turn adjuster, when the point (A) and (B) is adjusted as explained in the table right, there may be more than 1 turn between the point (A) and (B). Therefore, make sure to remember the turns of both points to find the optimum position.
- Be sure to wire the sensing mode selection input (Pink / 2) before distance adjustment. If the wiring is done after the distance adjustment, the sensing area is changed.

- Turn the distance adjuster gradually and lightly with a "minus" screwdriver (please arrange separately). In order to protect itself, the distance adjuster idles if turned fully. If the adjuster is idled when distance adjustment is done, carry out the adjustment again.

When using the BGS function

<When a sensing object is moving right or left to the sensor>

Step	Description	Distance adjuster
①	Turn the distance adjuster fully counterclockwise to the minimum sensing range position. (CX-441□/443□/444□: 20 mm 0.787 in approx., CX-442□: 40 mm 1.575 in approx.)	Turn fully
②	Place an object at the required distance from the sensor, turn the distance adjuster gradually clockwise, and find out point (A) where the sensor changes to the detecting condition.	
③	Remove the object, turn the adjuster clockwise further until the sensor goes into the detecting state again. Once it has entered, turn the distance adjuster backward until the sensor returns to the non-detecting condition. This position is designated as point (B). When the sensor does not go into the detecting condition even if the adjuster is turned fully clockwise, the position where the adjuster was fully turned is regarded as the point (B). (There may be more than 1 turn between point (A) and (B), since this sensor incorporates a 5-turn adjuster.)	
④	The optimum position to stably detect objects is the center point between (A) and (B).	

<When a sensing object is approaching / moving away from the sensor>

- Follow only steps ① and ②. Since the sensing point may change depending on the sensing object, be sure to check the operation with the actual sensing object.

When using the FGS function

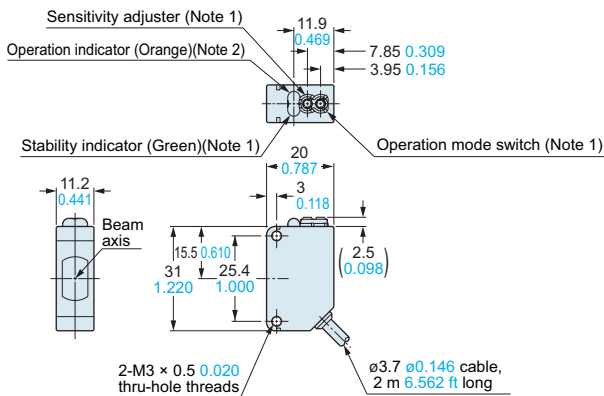
Step	Description	Distance adjuster
①	Turn the distance adjuster fully clockwise to the maximum sensing range position. (CX-441□/443□: 50 mm 1.969 in approx., CX-444□: 100 mm 3.937 in approx., CX-442□: 300 mm 11.811 in approx.)	Turn fully
②	In the state where the sensor detects the background, turn the distance adjuster gradually counterclockwise, and find out point (A) where the sensor changes to the non-detecting condition.	
③	Place an object at the required distance from the sensor, turn the adjuster counterclockwise further until the sensor goes into the non-detecting condition again. Once entered, turn the distance adjuster backward until the sensor returns to the detecting condition. This position is designated as point (B). When the sensor does not go into the non-detecting condition even if the adjuster is turned fully counterclockwise, the position where the adjuster was fully turned is regarded as the point (B). (There may be more than 1 turn between point (A) and (B), since this sensor incorporates a 5-turn adjuster.)	
④	The optimum position to stably detect objects is the center point between (A) and (B).	

Others

- Its distance adjuster is mechanically operated. Do not drop; avoid other shocks.

DIMENSIONS (Unit: mm in)The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>**CX-41□**

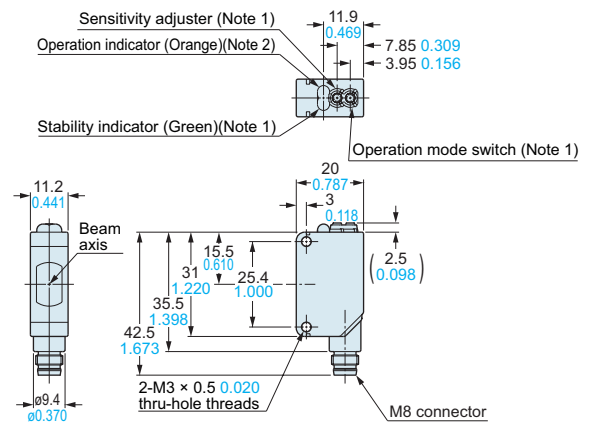
Sensor



Notes: 1) Not incorporated on the emitter.
2) It is the power indicator (green) on the emitter.

CX-41□-Z

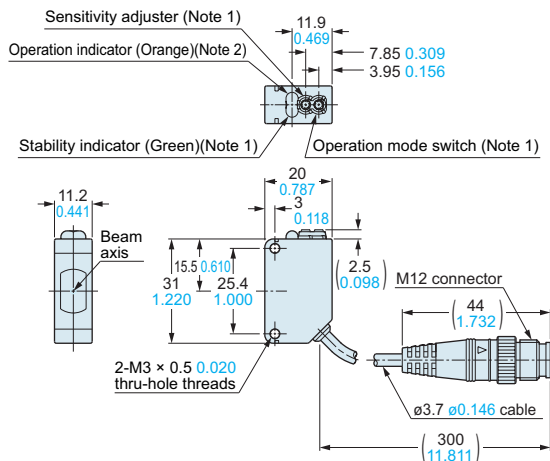
Sensor



Notes: 1) Not incorporated on the emitter.
2) It is the power indicator (green) on the emitter.

CX-41□-J

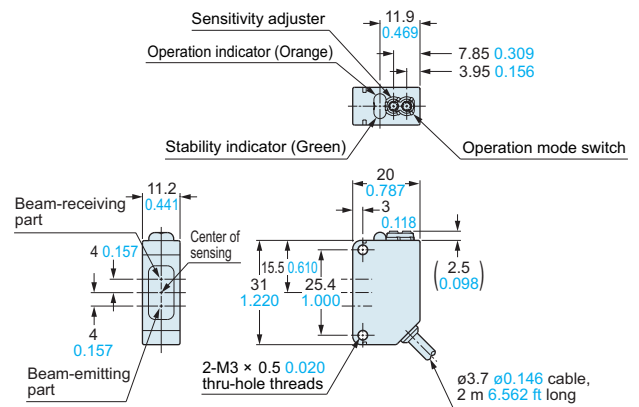
Sensor



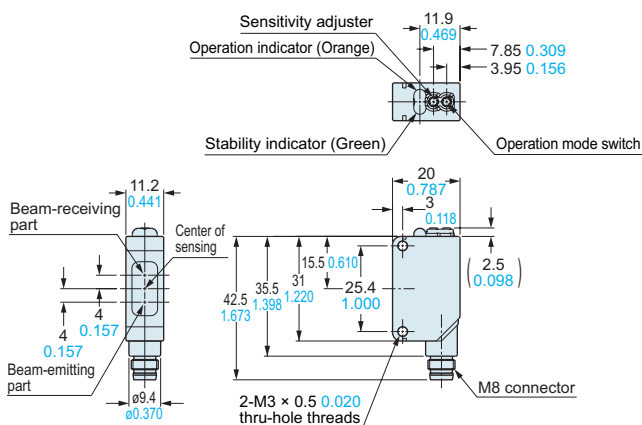
Notes: 1) Not incorporated on the emitter.
2) It is the power indicator (green) on the emitter.

CX-49□ CX-48□ CX-42□

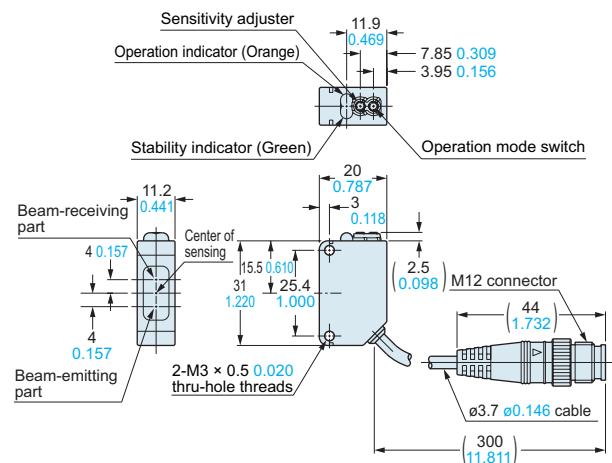
Sensor

**CX-49□-Z CX-48□-Z CX-42□-Z**

Sensor

**CX-49□-J CX-48□-J CX-42□-J**

Sensor



FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE- SAVING SYSTEMS

MEASURE- MENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

CX-400

EX-10

EX-20

EX-30

EX-40

EQ-30

EQ-500

MQ-W

RX-LS200

RX

CY

PX-2

RT-610

Power Supply Built-in

NX5

VF

Amplifier-separated

SU-7 / SH

SS-A5 / SH

Other Products

DIMENSIONS (Unit: mm in)The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY
COMPONENTSPRESSURE
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSWIRE-
SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERSSELECTION
GUIDEAMPLIFIER
BUILT-IN

CX-400

EX-10

EX-20

EX-30

EX-40

EQ-30

EQ-500

MQ-W

RX-LS200

RX

CY

PX-2

RT-610

Power Supply
Built-in

NX5

VF

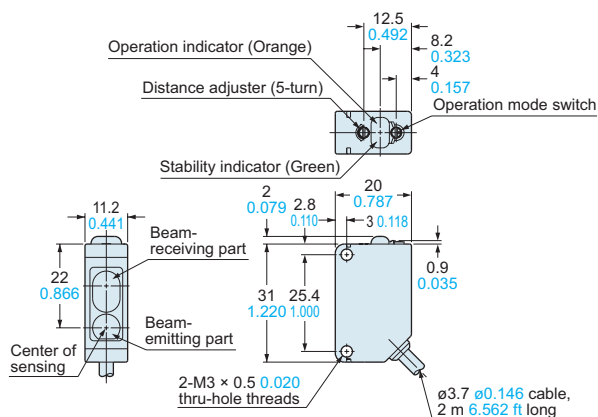
Amplifier-
separated

SU-7 / SH

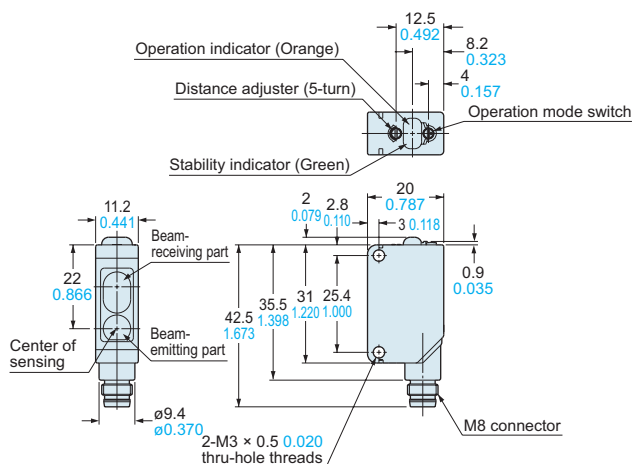
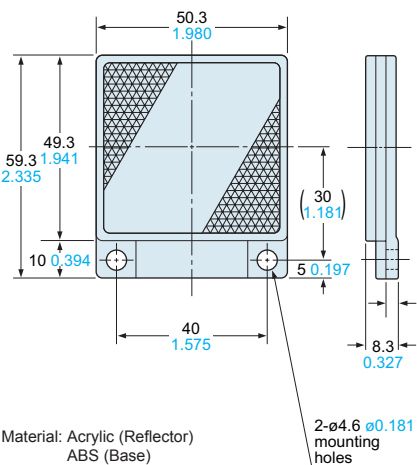
SS-A5 / SH

Other
Products**CX-44□**

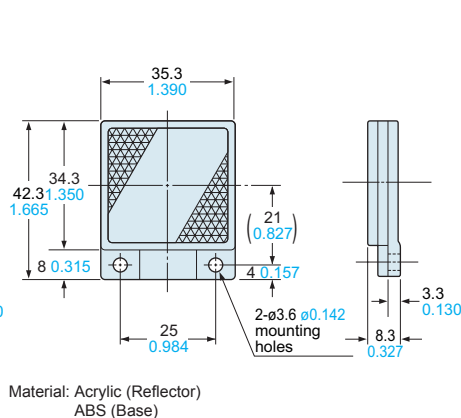
Sensor

**CX-44□-Z**

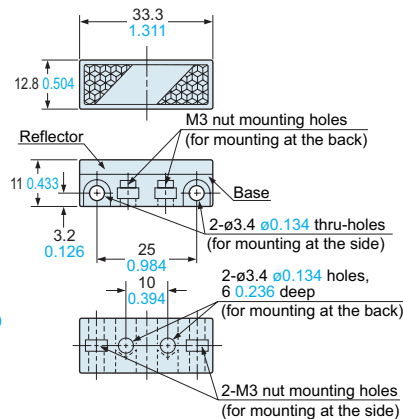
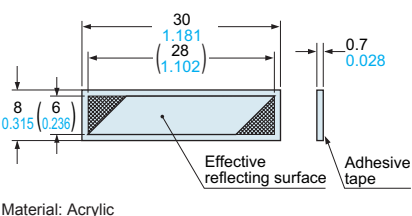
Sensor

**RF-230** Reflector (Accessory for the retroreflective type sensor)Material: Acrylic (Reflector)
ABS (Base)**RF-220**

Reflector (Optional)

Material: Acrylic (Reflector)
ABS (Base)**RF-210**

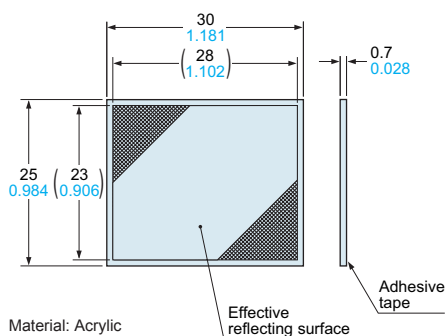
Reflector (Optional)

Material: Acrylic (Reflector)
ABS (Base)Two M3 (length 8 mm 0.315 in)
screws with washers and two nuts are attached.**RF-11** Reflective tape (Optional)

Material: Acrylic

RF-12

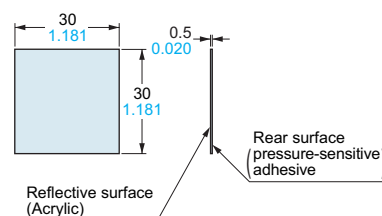
Reflective tape (Optional)



Material: Acrylic

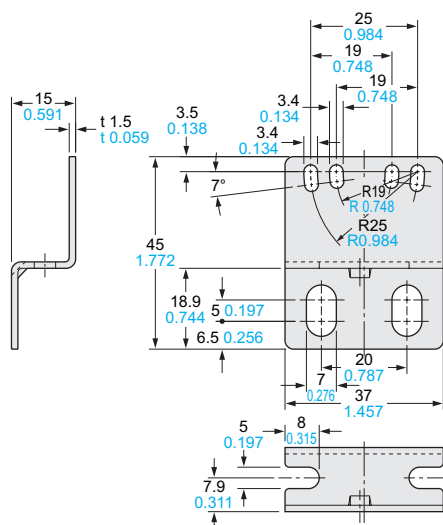
RF-13

Reflective tape (Optional)

Reflective surface
(Acrylic)

DIMENSIONS (Unit: mm in)The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>**MS-CX2-5**

Sensor mounting bracket (Optional)

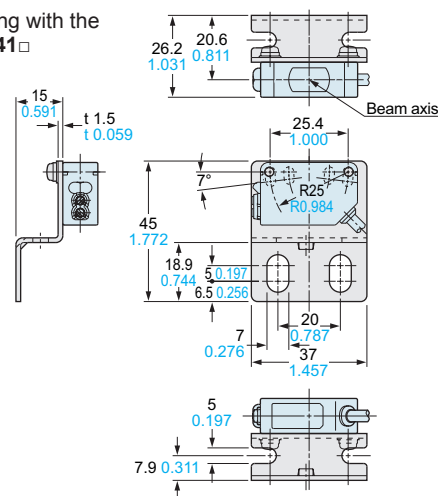


Material: Stainless steel (SUS304)

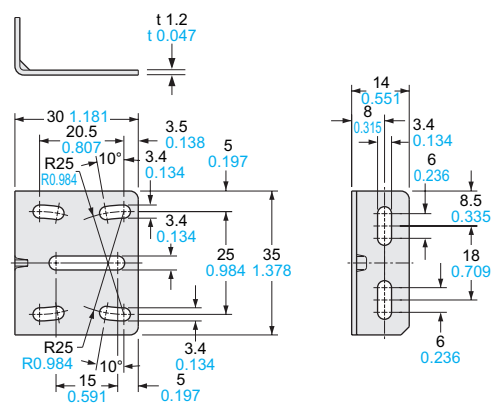
Two M3 (length 12 mm 0.472 in) screws with washers are attached.

Assembly dimensions

Mounting drawing with the receiver of CX-41□

**MS-CX-3**

Sensor mounting bracket (Optional)

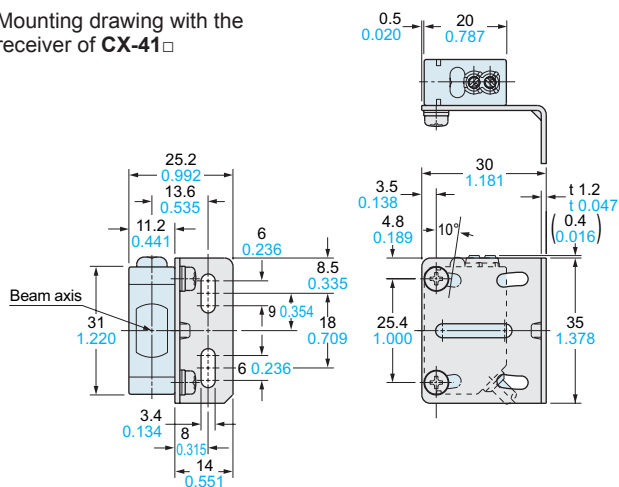


Material: Stainless steel (SUS304)

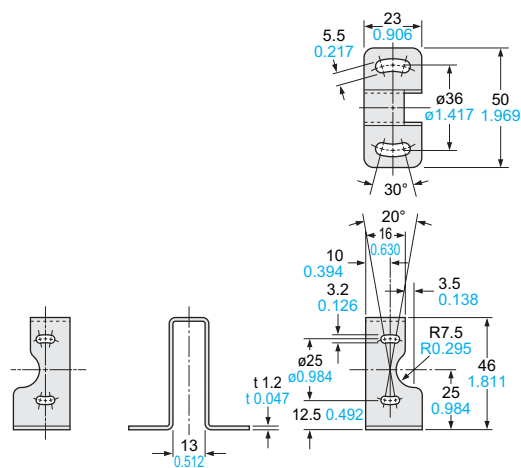
Two M3 (length 12 mm 0.472 in) screws with washers are attached.

Assembly dimensions

Mounting drawing with the receiver of CX-41□

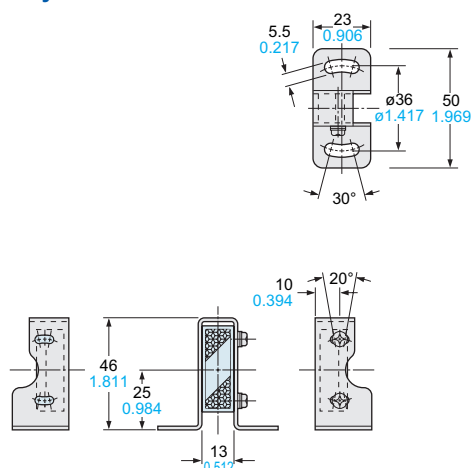
**MS-RF21-1**

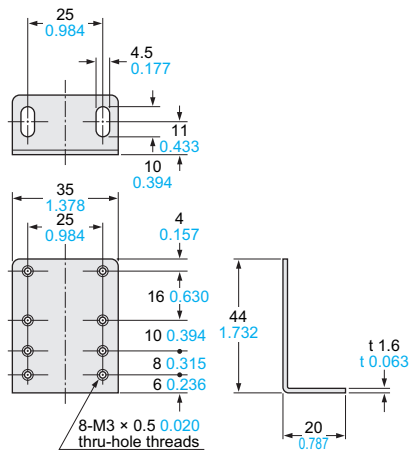
Reflector mounting bracket for RF-210 (Optional)

Assembly dimensions

Material: Stainless steel (SUS304)

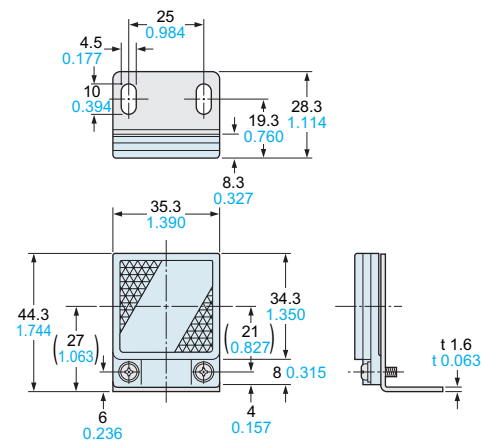
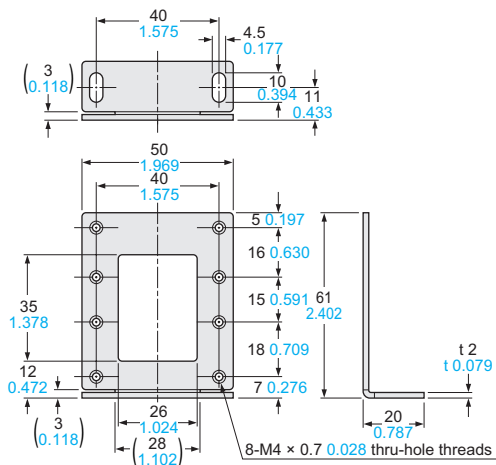
www.DataSheet4U.com screws with washers are attached.



DIMENSIONS (Unit: mm in) The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>**MS-RF22**Reflector mounting bracket for **RF-220** (Optional)**Assembly dimensions**

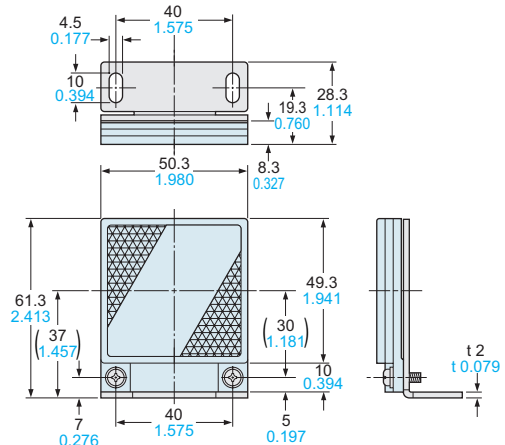
Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)

Two M3 (length 8 mm 0.315 in) screws with washers are attached.

**MS-RF23**Reflector mounting bracket for **RF-230** (Optional)**Assembly dimensions**

Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)

Two M4 (length 10 mm 0.394 in) screws with washers are attached.

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSSAFETY
COMPONENTSPRESSURE
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSWIRE-
SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
CONTROL
DEVICESLASER
MARKERSSelection
GuideAmplifier
Built-in
CX-400**EX-10****EX-20****EX-30****EX-40****EQ-30****EQ-500****MQ-W****RX-LS200****RX****CY****PX-2****RT-610**Power Supply
Built-in**NX5****VF**Amplifier-
separated**SU-7 / SH****SS-A5 / SH**Other
Products