



Digital Transistors (Built-in Resistors)

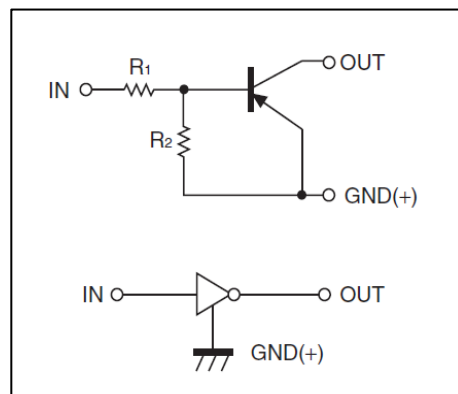
DTA143EM/DTA143EE/DTA143EUA DTA143EKA /DTA143ECA/DTA143ESA

DIGITAL TRANSISTOR (PNP)






FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

• Equivalent Circuit



PIN CONNENCTIONS and MARKING

DTA143EM  MARKING:13	SOT-723 1. IN 2. GND 3. OUT	DTA143EE  MARKING:13	SOT-523 1. IN 2. GND 3. OUT
DTA143EUA  MARKING:13	SOT-323 1. IN 2. GND 3. OUT	DTA143EKA  MARKING:13	SOT-23-3L 1. IN 2. GND 3. OUT
DTA143ECA  MARKING:13	SOT-23 1. IN 2. GND 3. OUT	DTA143ESA  123	TO-92S 1. GND 2. OUT 3. IN

MAXIMUM RATINGS(Ta=25°C unless otherwise noted)

Symbol	Parameter	Limits(DTA143E□)						Unit
		M	E	UA	KA	CA	SA	
V_{CC}	Supply Voltage	-50						V
V_{IN}	Input Voltage	-30~+10						V
I_O	Output Current	-100						mA
P_D	Power Dissipation	100	150	200	200	200	300	mW
T_j	Junction Temperature	150						°C
T_{stg}	Storage Temperature	-55~+150						°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	$V_{CC}=-5V, I_O=-100\mu A$	-0.5			V
	$V_{I(on)}$	$V_O=-0.3V, I_O=-20\text{ mA}$			-3	V
Output voltage	$V_{O(on)}$	$I_O/I_I=-10mA/-0.5mA$			-0.3	V
Input current	I_I	$V_I=-5V$			-1.8	mA
Output current	$I_{O(off)}$	$V_{CC}=-50V, V_I=0$			-0.5	μA
DC current gain	G_I	$V_O=-5V, I_O=-10mA$	30			
Input resistance	R_1		3.29	4.7	6.11	k Ω
Resistance ratio	R_2/R_1		0.8	1	1.2	
Transition frequency	f_T	$V_O=-10V, I_O=-5mA, f=100MHz$		250		MHz