

# MM74C912 6-Digit BCD Display Controller/Driver

## MM74C917 6-Digit Hex Display Controller/Driver

### General Description

The MM74C912, MM74C917 display controllers are interface elements, with memory, that directly drive a 6-digit, 8-segment LED display.

The display controllers receive data information through 5 data inputs A, B, C, D and DP, and digit information through 3 address inputs K1, K2 and K3.

The input data is written into the register selected by the address information when **CHIP ENABLE, CE**, and **WRITE ENABLE, WE**, are low and is latched when either **CE** or **WE** return high. Data hold time is not required. A self-contained internal oscillator sequentially presents the stored data to a decoder where 4 data bits control the format of the displayed character and 1 bit controls the decimal point. The internal oscillator is controlled by a control input labeled **OSCILLATOR ENABLE, OSE**, which is tied low in normal operation. A high level at **OSE** prevents automatic refresh of the display.

The 7-segment plus decimal point output information directly drives a LED display through high drive (100

mA typ) output drivers. The drivers are active when the control pin labeled **SEGMENT OUTPUT ENABLE, SOE**, is low and go into TRI-STATE® when **SOE** is high. This feature allows for duty cycle brightness control and for disabling the output drivers for power conservation.

The MM74C912 segment decoder converts BCD data into 7-segment format. The MM74C917 converts binary data into hex format.

All inputs are TTL compatible and do not clamp to the **VCC** supply.


### Features

- Direct segment drive (100 mA typ) TRI-STATEABLE
- 6 registers addressed like RAM
- Internal oscillator and scanning circuit
- Direct base drive to digit transistor (20 mA typ)
- Internal segment decoder
- TTL compatible inputs

### Truth Tables

### Connection Diagram

Dual-In-Line Package

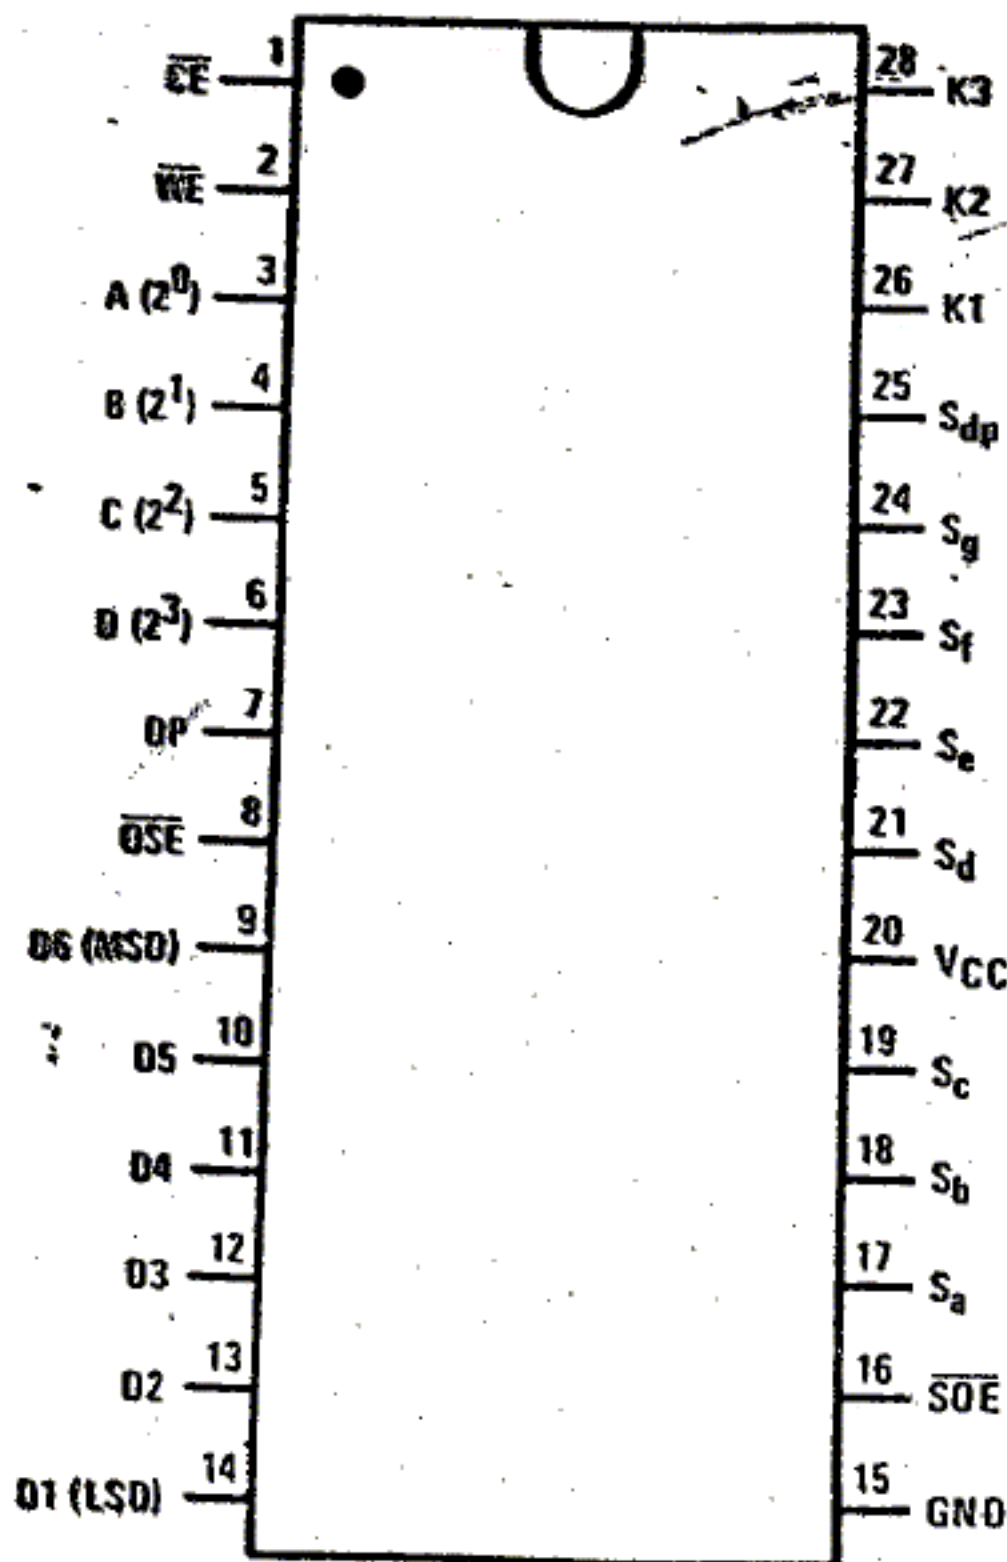

TOP VIEW

Input Control

CE	DIGIT ADDRESS			WE	OPERATION
	K3	K2	K1		
0	0	0	0	0	Write Digit 1
0	0	0	0	1	Latch Digit 1
0	0	0	1	0	Write Digit 2
0	0	0	1	1	Latch Digit 2
0	0	1	0	0	Write Digit 3
0	0	1	0	1	Latch Digit 3
0	0	1	1	0	Write Digit 4
0	0	1	1	1	Latch Digit 4
0	1	0	0	0	Write Digit 5
0	1	0	0	1	Latch Digit 5
0	1	0	1	0	Write Digit 6
0	1	0	1	1	Latch Digit 6
0	1	1	0	0	Write Null Digit
0	1	1	0	1	Latch Null Digit
0	1	1	1	0	Write Null Digit
0	1	1	1	1	Latch Null Digit
1	X	X	X	X	Disable Writing

X = don't care

Output Control

SOE	OSE	OPERATION
0	0	Refresh Display
0	1	Stop Oscillator*
1	0	Disable Segment Outputs
1	1	Standby Mode

\*Segment drive may exceed maximum display dissipation.

www.DataSheet4U.com



Voltage at Any Pin Except Inputs	-0.3V to $V_{CC}+0.3V$	Package Dissipation	Refer to PD MAX vs T <sub>A</sub> Graph
Voltage at Any Input	-0.3V to +15V	Operating V <sub>CC</sub> Range	3V to 6V
Operating Temperature Range (T <sub>A</sub> )	-40°C to +85°C	Absolute Maximum V <sub>CC</sub>	6.5V
Storage Temperature Range	-65°C to +150°C	Lead Temperature (Soldering, 10 seconds)	300°C

## DC Electrical Characteristics

Min/max limits apply at 40°C ≤ T<sub>J</sub> ≤ 85°C, unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>CMOS TO CMOS</b>					
V <sub>IN(1)</sub>	Logical "1" Input Voltage V <sub>CC</sub> = 5V	3.0			V
V <sub>IN(0)</sub>	Logical "0" Input Voltage V <sub>CC</sub> = 5V			1.5	V
I <sub>IN(1)</sub>	Logical "1" Input Current V <sub>CC</sub> = 5V, V <sub>IN</sub> = 15V		0.005	1.0	μA
I <sub>IN(0)</sub>	Logical "0" Input Current V <sub>CC</sub> = 5V, V <sub>IN</sub> = 0V	-1.0	-0.005		μA
I <sub>CC</sub>	Supply Current V <sub>CC</sub> = 5V, Outputs Open		0.5	2	mA
I <sub>OUT</sub>	TRI-STATE Output Current V <sub>CC</sub> = 5V, V <sub>O</sub> = 5V		0.03	3	μA
	V <sub>CC</sub> = 5V, V <sub>O</sub> = 0V	-3	-0.03		μA
<b>CMOS/LPTTL INTERFACE</b>					
V <sub>IN(1)</sub>	Logical "1" Input Voltage V <sub>CC</sub> = 4.75V	V <sub>CC</sub> -2.0			V
V <sub>IN(0)</sub>	Logical "0" Input Voltage V <sub>CC</sub> = 4.75V			0.8	V
<b>OUTPUT DRIVE</b>					
I <sub>SH</sub>	High Level Segment Current V <sub>CC</sub> = 5V, V <sub>O</sub> = 3.4V, T <sub>J</sub> = 25°C	-60	-100		mA
	T <sub>J</sub> = 100°C	-40	-60		mA
I <sub>DH</sub>	High Level Digit Current V <sub>CC</sub> = 5V, V <sub>O</sub> = 1V, T <sub>J</sub> = 25°C	-10	-20		mA
	T <sub>J</sub> = 100°C	-7	-15		mA
V <sub>OUT(1)</sub>	Logical "1" Output Voltage Any Digit V <sub>CC</sub> = 5V, I <sub>O</sub> = -360 μA	4.6			V
V <sub>OUT(0)</sub>	Logical "0" Output Voltage Any Output V <sub>CC</sub> = 5V, I <sub>O</sub> = 360 μA			0.4	V
θ <sub>JA</sub>	Thermal Resistance (Note 3)		100		°C/W

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Range" they are not meant to imply that the device should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: All voltages reference to ground.

Note 3: θ<sub>JA</sub> measured in free air with device soldered into printed circuit board.

## AC Electrical Characteristics



V<sub>CC</sub> = 5V, t<sub>r</sub> = t<sub>f</sub> = 20 ns, C<sub>L</sub> = 50 pF

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
t <sub>CW</sub>	Chip Enable to Write Enable Setup Time T <sub>J</sub> = 25°C	35	15		ns
	T <sub>J</sub> = 125°C	50	20		ns
t <sub>AW</sub>	Address to Write Enable Setup Time T <sub>J</sub> = 25°C	35	15		ns
	T <sub>J</sub> = 125°C	50	20		ns
t <sub>WW</sub>	Write Enable Width T <sub>J</sub> = 25°C	400	225		ns
	T <sub>J</sub> = 125°C	450	250		ns


PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
$t_{DW}$ Data to Write Enable Setup Time	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	390 430	225 250		ns
$t_{WD}$ Write Enable to Data Hold Time	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	0 0	-10 -15		ns
$t_{WA}$ Write Enable to Address Hold Time	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	0 0	-10 -15		ns
$t_{WC}$ Write Enable to Chip Enable Hold Time	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	50 75	30 40		ns
$t_{1H}, t_{0H}$ Logical "1", Logical "0" Levels Into TRI-STATE	$R_L = 10k$ , $T_J = 25^\circ\text{C}$ $C_L = 10\text{ pF}$ , $T_J = 125^\circ\text{C}$		275 325	500 600	ns
$t_{H1}, t_{H0}$ TRI-STATE to Logical "1" to Logical "0" Level	$R_L = 10k$ , $T_J = 25^\circ\text{C}$ $C_L = 50\text{ pF}$ , $T_J = 125^\circ\text{C}$		325 375	600 700	ns
$t_{IB}$ Interdigit Blanking Time	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	5 10	10 20		$\mu\text{s}$
$f_{MUX}$ Multiplex Scan Frequency	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$		350 250		Hz
$C_{IN}$ Input Capacitance	Note 4		5	7.5	pF
$C_{OUT}$ TRI-STATE Output Capacitance	Note 4		30	50	pF

Note 4: Capacitance is guaranteed by periodic testing.

## Switching Time Waveforms

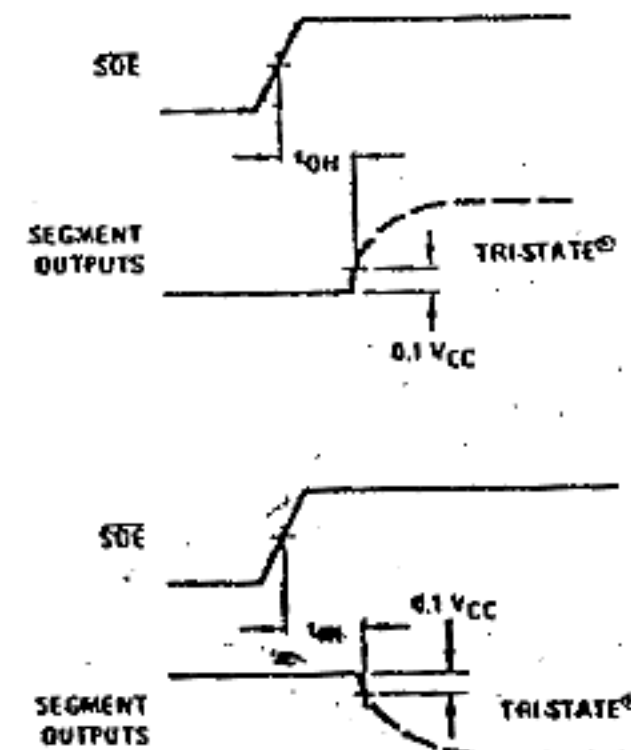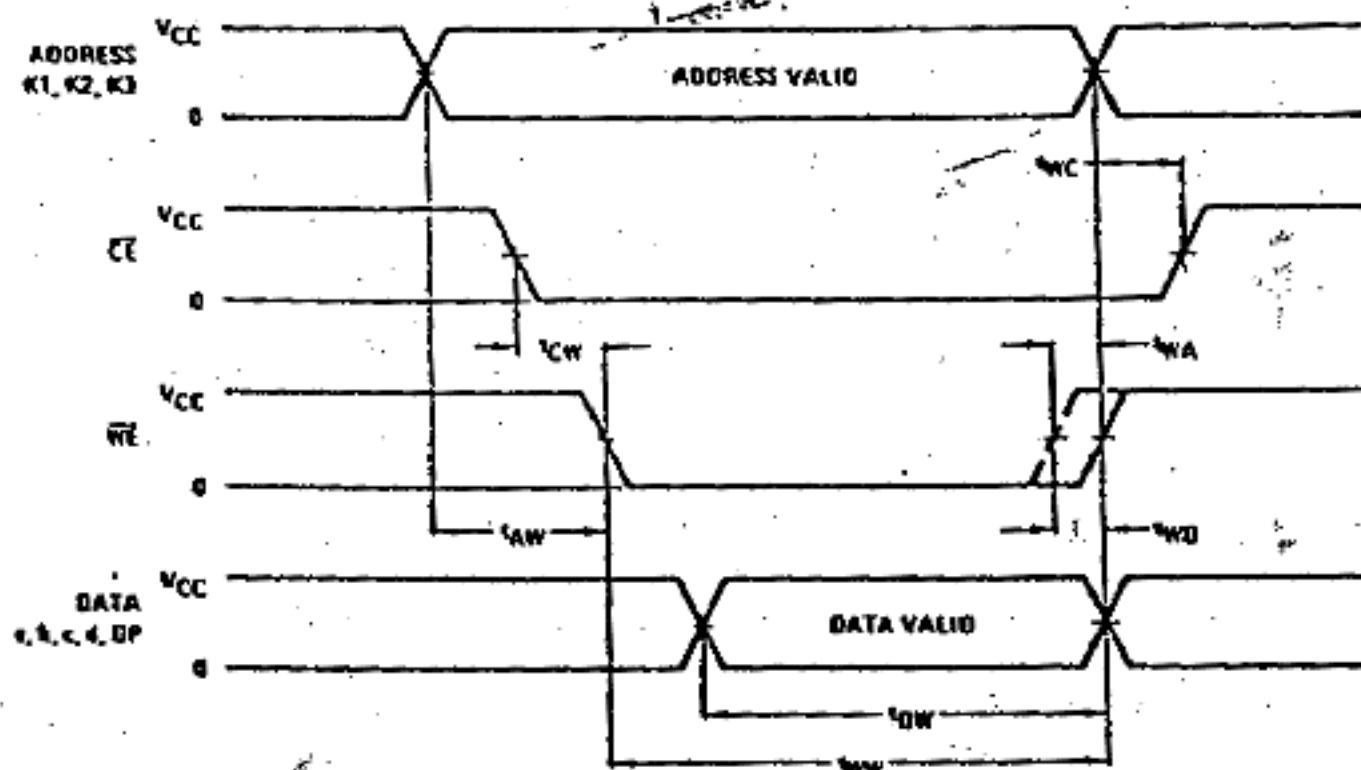

## Multiplexing Output Waveforms

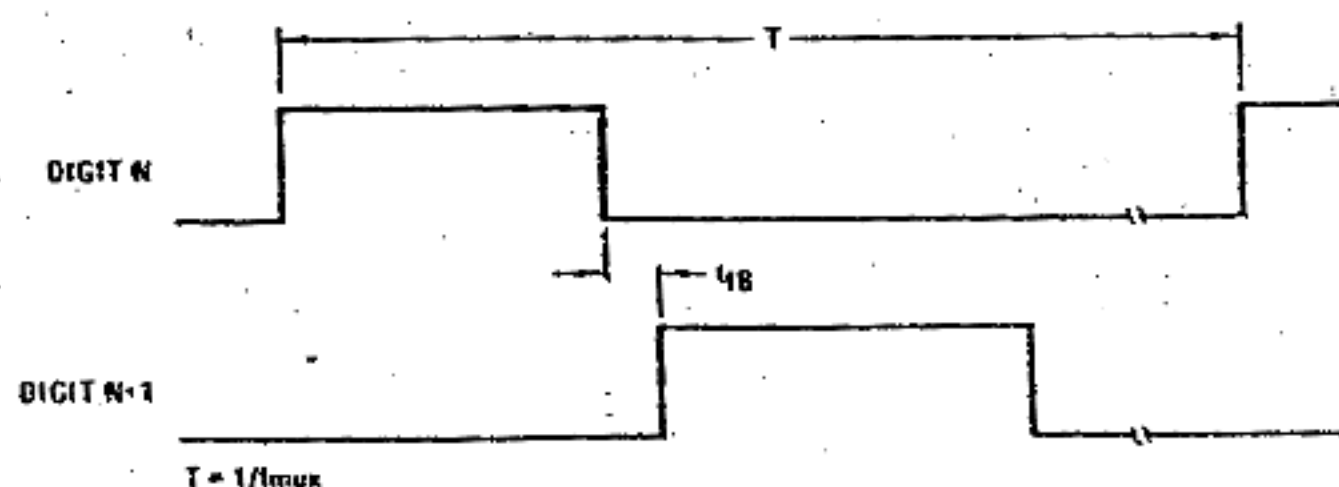

# Functional Description

www.DataSheet4U.com

Character Font

MM74C917	HI-Z	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	F.
MM74C912	HI-Z	0	1	2	3	4	5	6	7	8	9	.	-	-	-	-	-	.
Input A <sup>2</sup> <sub>0</sub>	X	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	1
Data B <sup>2</sup> <sub>1</sub>	X	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	1
C <sup>2</sup> <sub>2</sub>	X	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1	1
D <sup>2</sup> <sub>3</sub>	X	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1
DP	X	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Output Enable $\overline{SOE}$	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

## Segment Identification




The MM74C912, MM74C917 display controllers are manufactured using metal gate CMOS technology. A single 5V 74 series TTL supply can be used for power and should be bypassed at the VCC pin.

All inputs are TTL compatible; the segment outputs drive the LED display directly through current limiting resistors. The digit outputs are designed to directly drive the base of a grounded emitter digit transistor without the need of a Darlington configuration.





As seen in the block diagram, these display controllers contain six 5-bit registers; any one of which may be randomly written. The internal multiplexer scans the registers and refreshes the display. This combination of write only memory and self-scan display makes the display controller a "refreshing experience" for an overburdened microprocessor.

## Block Diagram

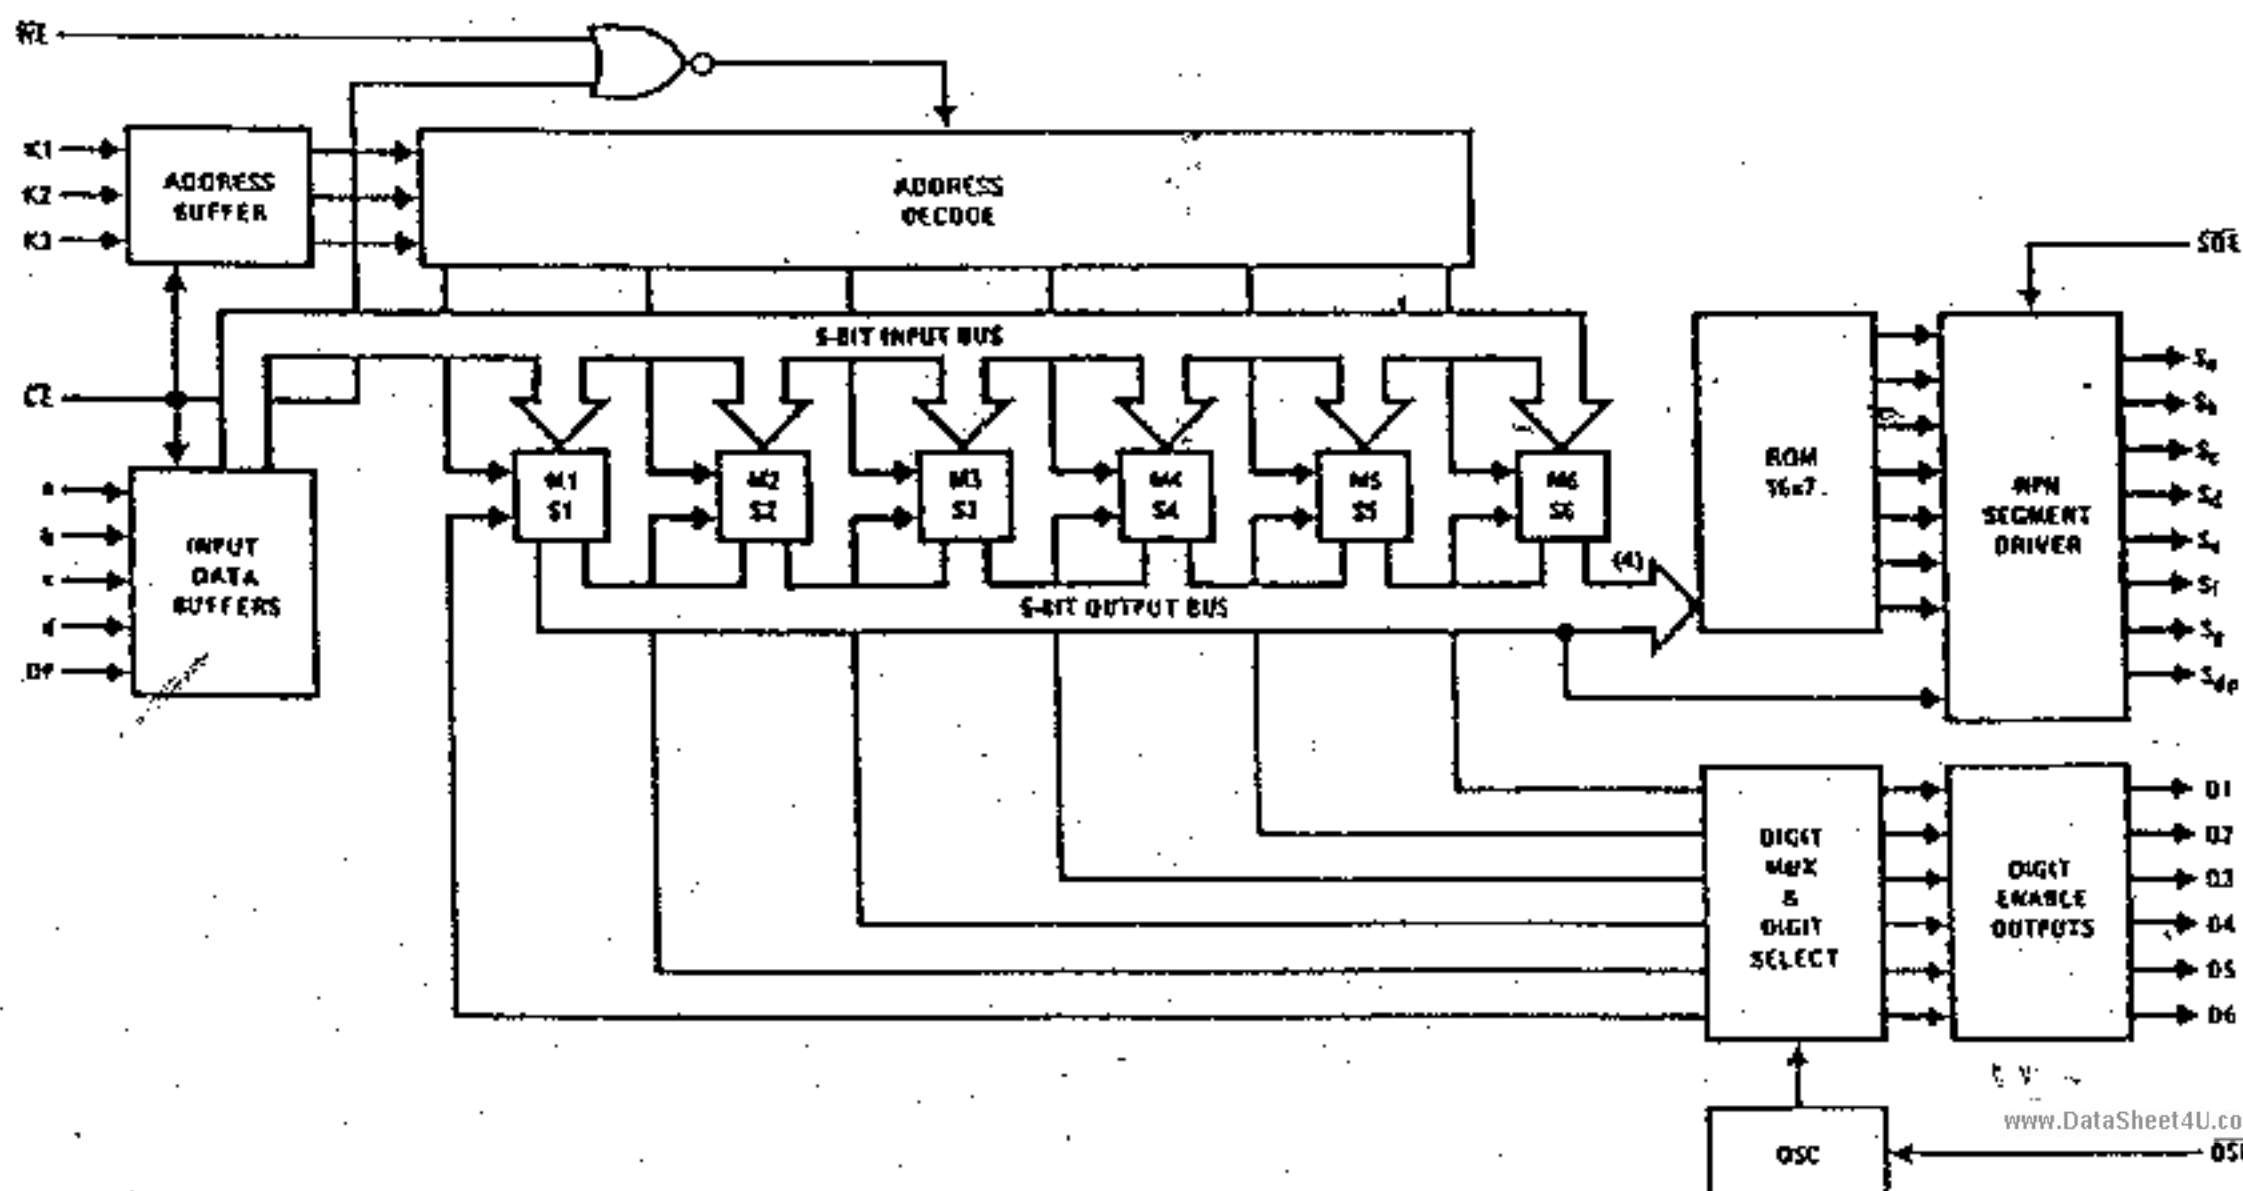

www.DataSheet4U.com

# Typical Performance Characteristics

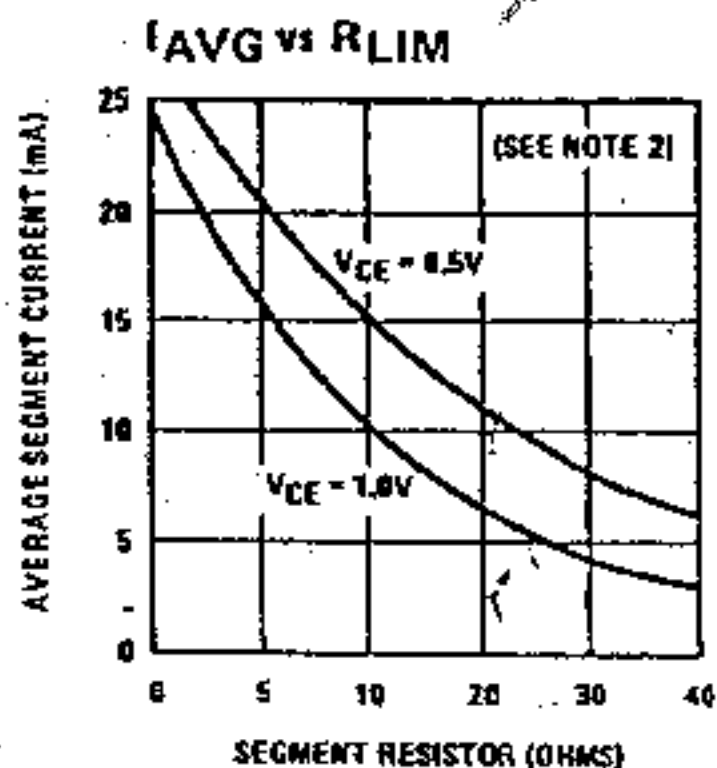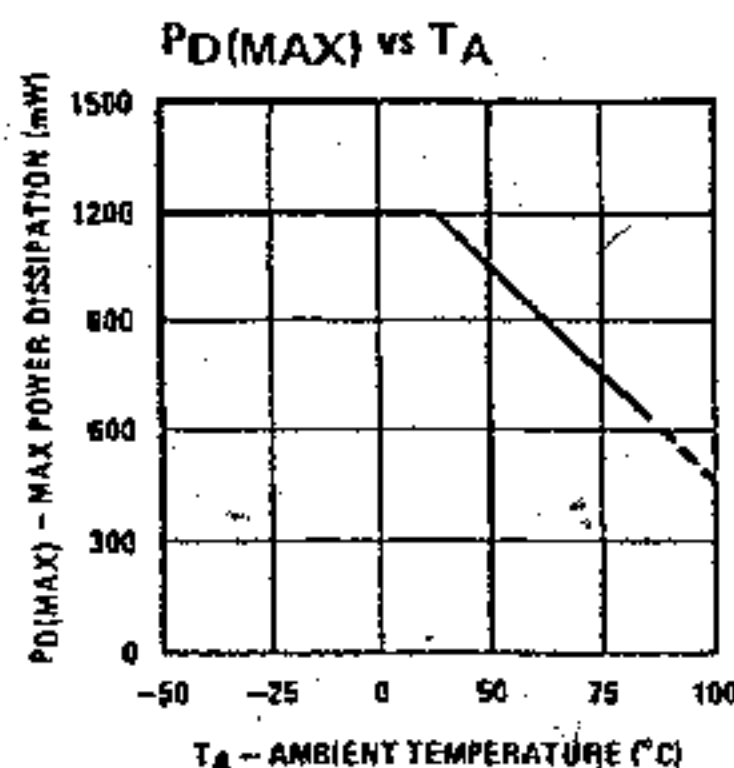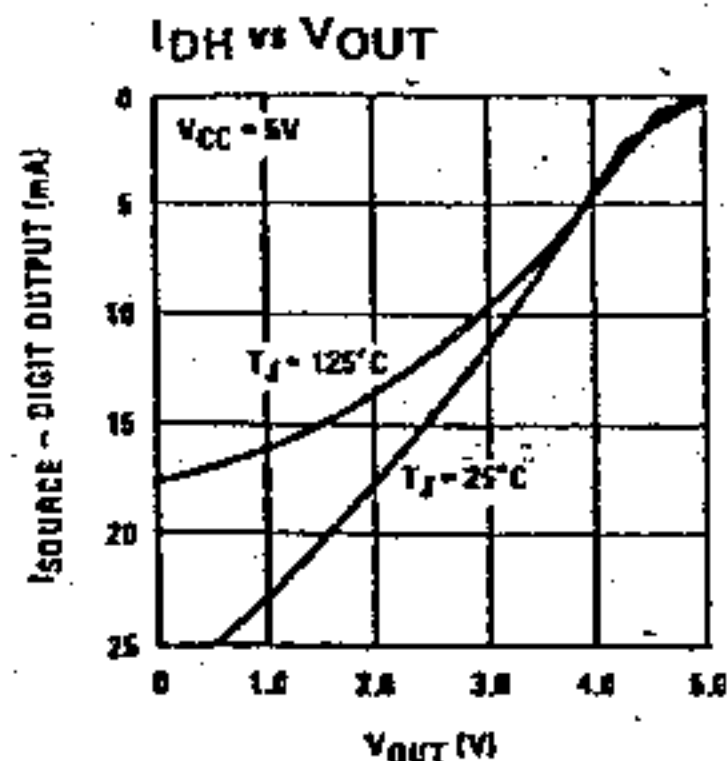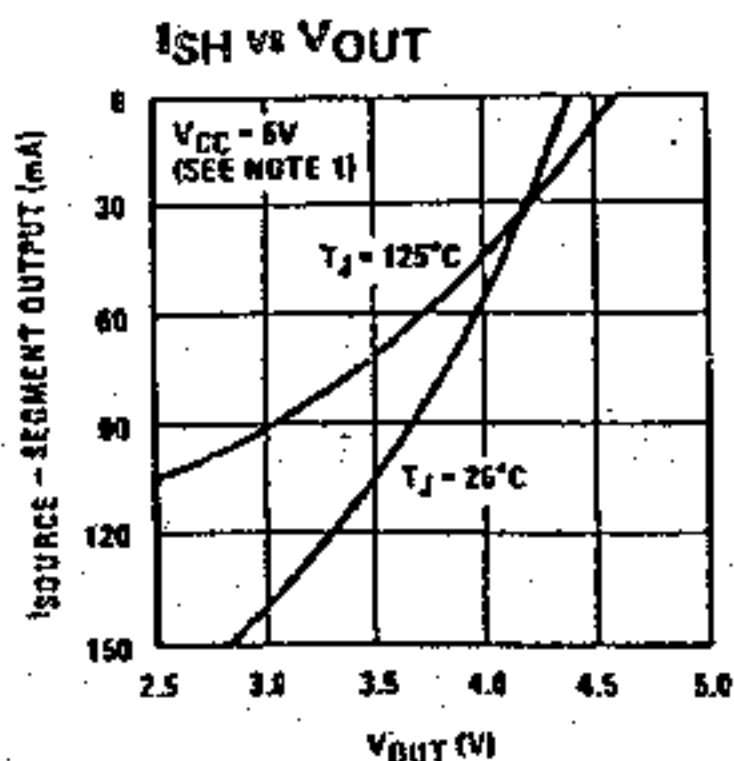


Note 1: Segment outputs if shorted to ground will exceed maximum power dissipation of the device.


Note 2:  $V_{CE}$  is the saturation voltage of the digit drive transistor.

## Applications


### Digit Output Structure

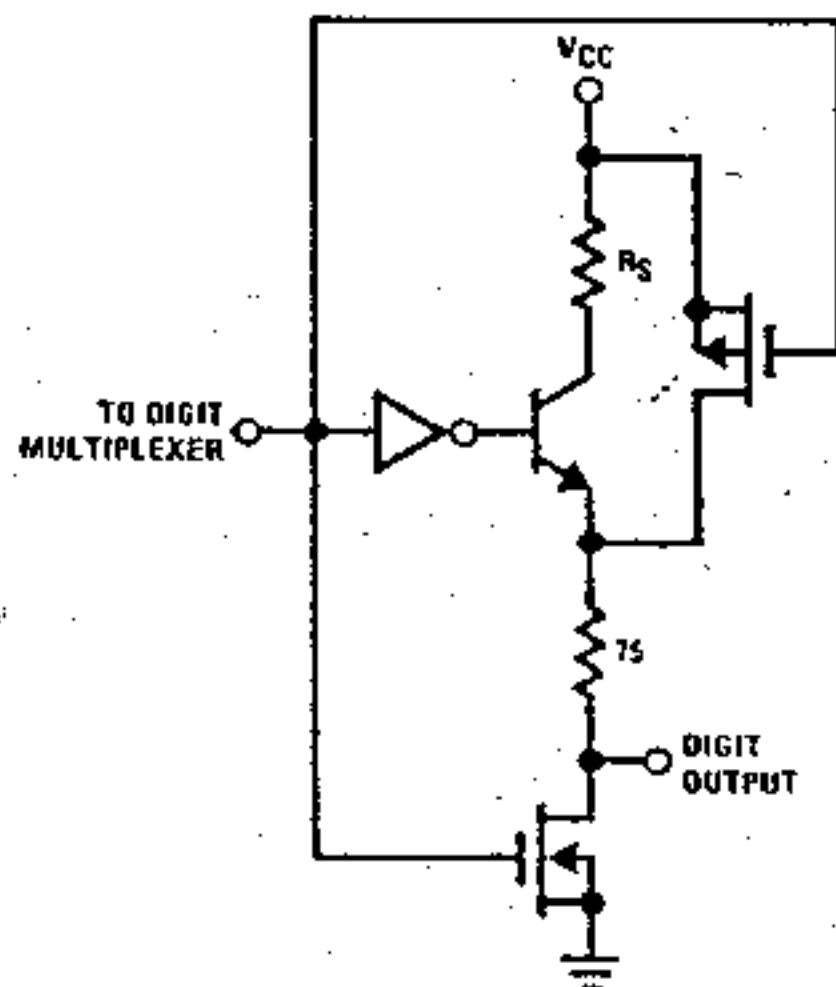


### Segment Output Structure

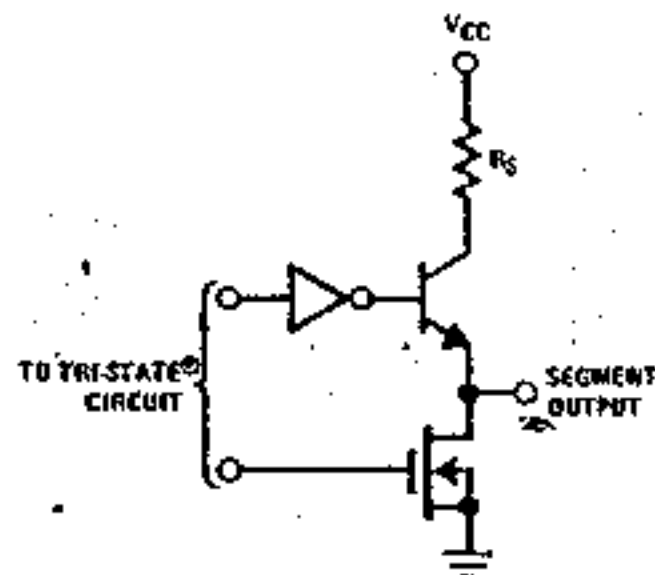


### Input Protection

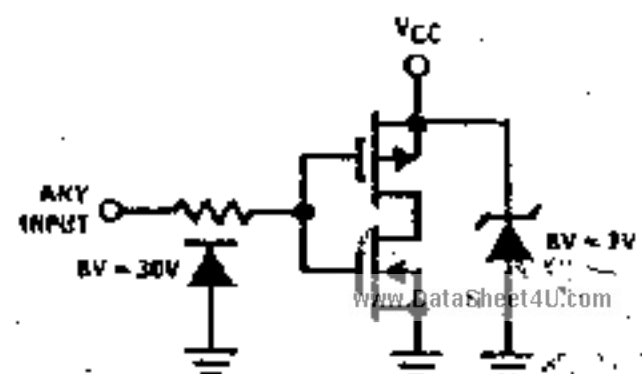





## inches (millimeters)



**NS Package Number N28A**

Manufactured under one or more of the following U.S. patents: 3083262, 3189758, 3231797, 3303396, 3317671, 3323071, 3381071, 3408542, 3421025, 3426423, 3440498, 3518750, 3519897, 3557431, 3560765, 3566218, 3571630, 3575809, 3579059, 3593069, 3593640, 3607469, 3617859, 3631312, 3633052, 3638131, 3648071, 3651565, 3693248.

**National Semiconductor Corporation** 2900 Semiconductor Drive, Santa Clara, California 95051. (408) 737-5000/TWX (910) 339-9240  
**National Semiconductor GmbH** 406 Fuerstenfeldbruck, Industriestrasse 10, West Germany. Tele (08141) 1031/Telex 05-27649  
**NS Electronics (HK) Ltd.** 4 Hing Yip Street, 11th Floor, Kwun Tong, Kowloon, Hong Kong. Tele 3-411241-8/Telex 73866 NSE HK HX  
**NS International Inc.** Miyake Bldg 6F, 1-9 Yotsuya, Shinjuku-Ku, Tokyo 160, Japan. Tele. 03-355-3711/Telex J28592  
**NS Electronics Pty. Ltd.** CNR-Stud Road & Mountain Highway, Bayswater, Victoria 3153, Australia. Tele 03-729-6333/Telex 32096

