



# F1T1 THRU F1T7

## 1.0 AMP. Fast Recovery Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
1.0 Ampere


### Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

### Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 0.20 gram

### TS-1

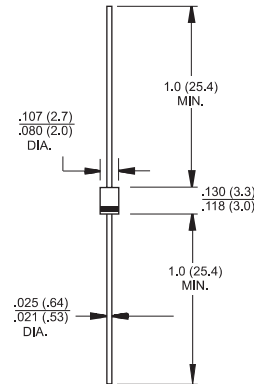

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	F1T1	F1T2	F1T3	F1T4	F1T5	F1T6	F1T7	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @ T <sub>A</sub> = 55°C	I <sub>(AV)</sub>	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	I <sub>FSM</sub>	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	V <sub>F</sub>	1.2							V
Maximum DC Reverse Current @ T <sub>A</sub> =25°C at Rated DC Blocking Voltage @ T <sub>A</sub> =100°C	I <sub>R</sub>	5.0 100							uA uA
Maximum Reverse Recovery Time ( Note 1 )	T <sub>rr</sub>	150				250	500		nS
Typical Junction Capacitance ( Note 2 )	C <sub>j</sub>	10							pF
Typical Thermal Resistance ( Note 3 )	R <sub>θJA</sub>	100							°C/W
Operating Temperature Range	T <sub>J</sub>	-65 to +150							°C
Storage Temperature Range	T <sub>STG</sub>	-65 to +150							°C

Notes: 1. Reverse Recovery Test Conditions:  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$   
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.  
3. Mount on Cu-Pad Size 5mm x 5mm on P.C.B.

## RATINGS AND CHARACTERISTIC CURVES (F1T1 THRU F1T7)

FIG.1- MAXIMUM TYPICAL FORWARD CURRENT DERATING CURVE

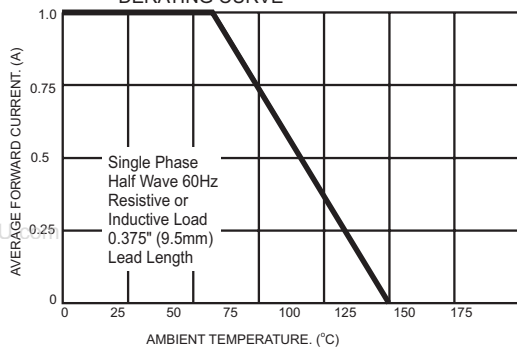


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

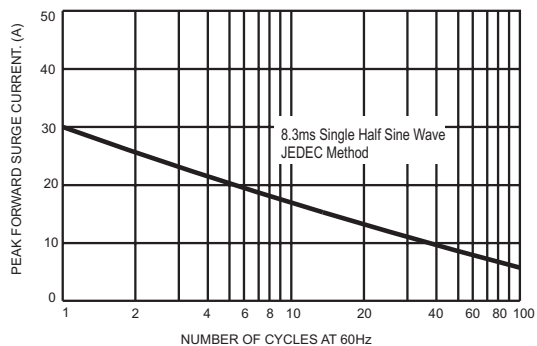


FIG.3- TYPICAL FORWARD CHARACTERISTICS

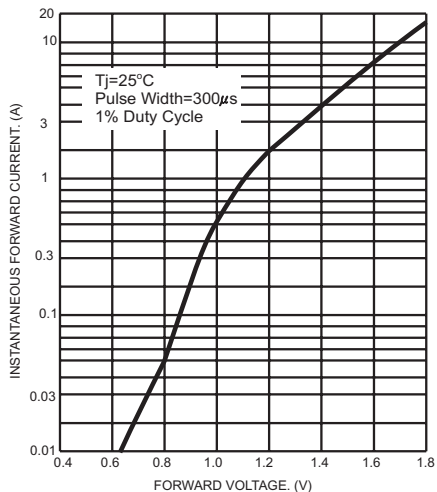


FIG.4- TYPICAL JUNCTION CAPACITANCE

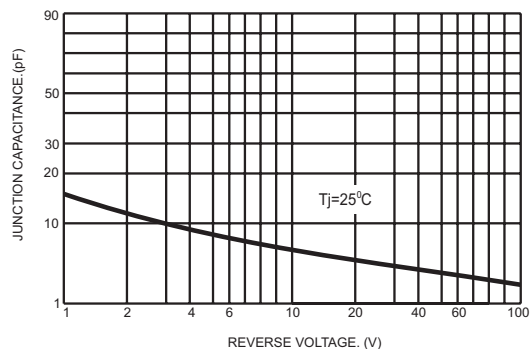


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

