

Photodiodes



FDG03



Description

The Thorlabs FDG03 photodiode is ideal for measuring both pulsed and CW fiber light sources, by converting the optical power to an electrical current. The detector is housed in a TO-5 package with an anode, cathode, and case connection. The photodiode anode produces a current, which is a function of the incident light power and the wavelength. The responsivity $\mathcal{R}(\lambda)$, can be read from the responsivity graph to estimate the amount of photocurrent to expect. This can be converted to a voltage by placing a load resistor (R_L) from the photodiode anode to the circuit ground. The output voltage is derived as:

$$V_o = P \times \mathcal{R}(\lambda) \times R_L$$

The bandwidth, f_{BW} , and the rise time response, t_R , are determined from the diode capacitance, C_J , and the load resistance, R_L , as shown below. Placing a bias voltage from the photo diode cathode to the circuit ground can lower the photo diode capacitance.

$$f_{BW} = \frac{1}{2\pi(R_L)C_J}, t_R = \frac{0.35}{f_{BW}}$$


Specifications

Specification	Value
Wavelength Range	800 - 1800 nm
Active Area	Ø3.0 mm (7.1 mm ²)
Rise/Fall Time, Typ ($R_L=50 \Omega$, 3 V)	500 ns
Bandwidth ($R_L=50 \Omega$, -3 dB, 3 V)	0.7 MHz
NEP, Typical (1550 nm)	$1.0 \times 10^{-12} \text{ W/Hz}^{1/2}$
Dark Current, Max (1 V)	4.0 μA
Capacitance, Max (1 V)	4.0 nF
Package	TO-5

Specification	Value
Sensor Material	Ge Pin
Max Ratings	
Damage Threshold, CW	10 W/cm ²
Damage Threshold, Pulse	n/a
Max Bias (Reverse) Voltage	3 V
Operating Temperature	-55 to 60 °C
Storage Temperature	-55 to 60 °C
Reverse Current	n/a
Forward Current	n/a

Recommended Circuit Diagram

Application of a reverse bias can greatly improve the response speed and linearity of the device. This is due to increase in the depletion region width and, consequently, decrease in junction capacitance. However, the dark current and noise will increase.

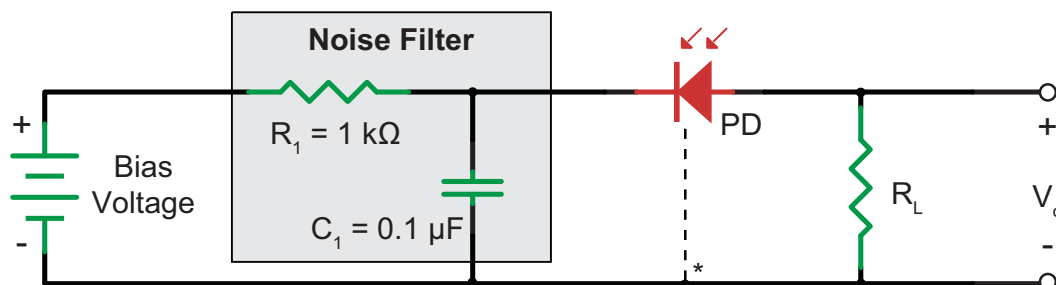

* Case ground for PD with a third lead.


Graphs

The responsivity of a photodiode is a measure of its sensitivity to light, and it is defined as the ratio of the photocurrent I_P to the incident light power P at a given wavelength:


$$R_\lambda = \frac{I_P}{P}$$

In other words, it is a measure of the effectiveness of the conversion of light power into electrical current. Responsivity varies from lot to lot and with the wavelength of the incident light, applied reverse bias, and temperature. It increases slightly with applied reverse bias due to improved charge collection efficiency in the photodiode. The change in temperature increases or decreases the width of the band gap and varies inversely with the temperature.

FDG Series Photodiode Responsivity

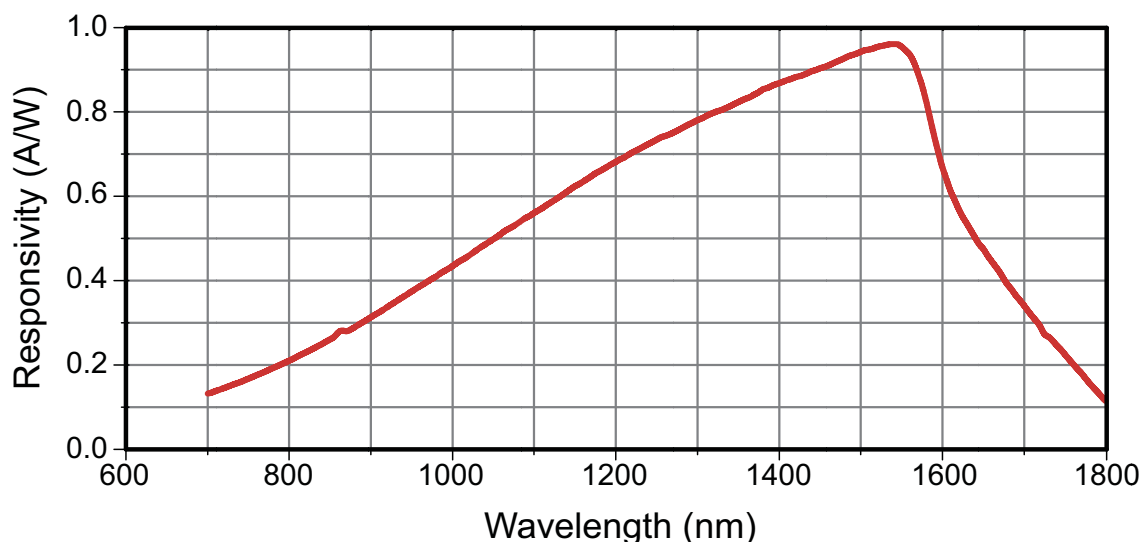

Drawings

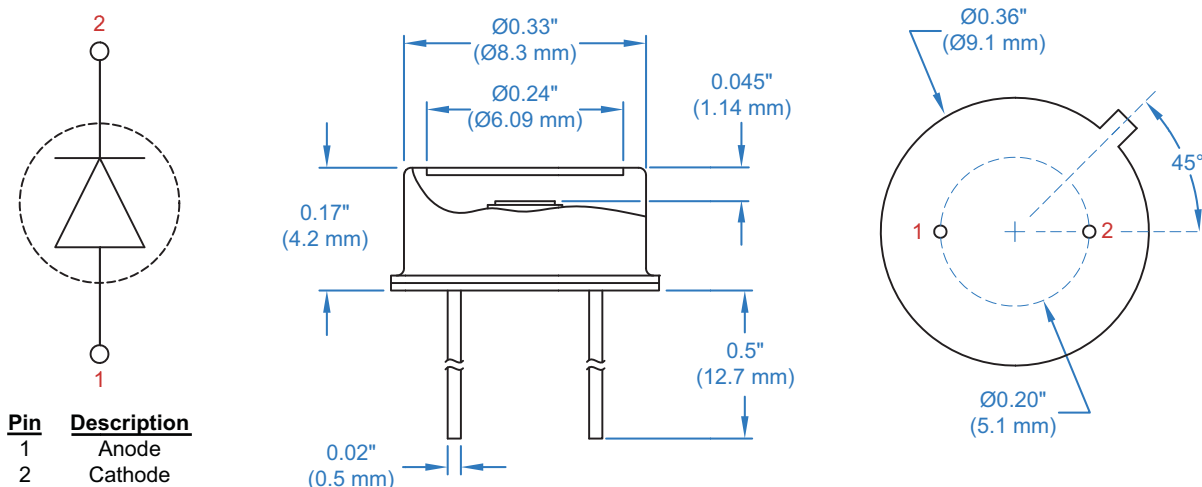

USA, Canada, & S. America
Thorlabs, Inc.
435 Route 206
Newton, NJ 07860, USA
Tel: 973-579-7227
Fax: 973-300-3600
www.thorlabs.com
email: feedback@thorlabs.com

Europe
Thorlabs GmbH
Hans-Böckler-Str. 6
85221 Dachau, Germany
Tel: +49-(0)8131-5956-0
Fax: +49-(0)8131-5956-99
www.thorlabs.com
email: Europe@thorlabs.com

UK and Ireland
Thorlabs LTD.
1 Saint Thomas Place, Ely
Cambridgeshire CB7 4EX, GB
Tel: +44 (0)1353-654440
Fax: +44 (0)1353-654444
www.thorlabs.com
email: sales.uk@thorlabs.com

Scandinavia
Thorlabs Sweden AB
Box 141 94
400 20 Göteborg, Sweden
Tel: +46-31-733-30-00
Fax: +46-31-703-40-45
www.thorlabs.com
email: scandinavia@thorlabs.com

Japan and Asia
Thorlabs Japan Inc.
5-17-1, Ohtsuka
Bunkyo-ku, Tokyo 112-0012, Japan
Tel: +81-3-5979-8889
Fax: +81-3-5979-7285
www.thorlabs.jp
email: sales@thorlabs.jp

