

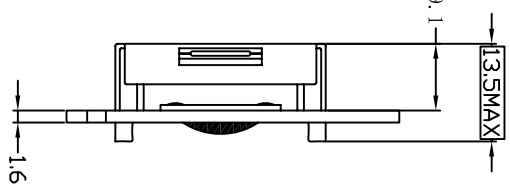


REV.	CHANGE CONTENT	BY	DATE

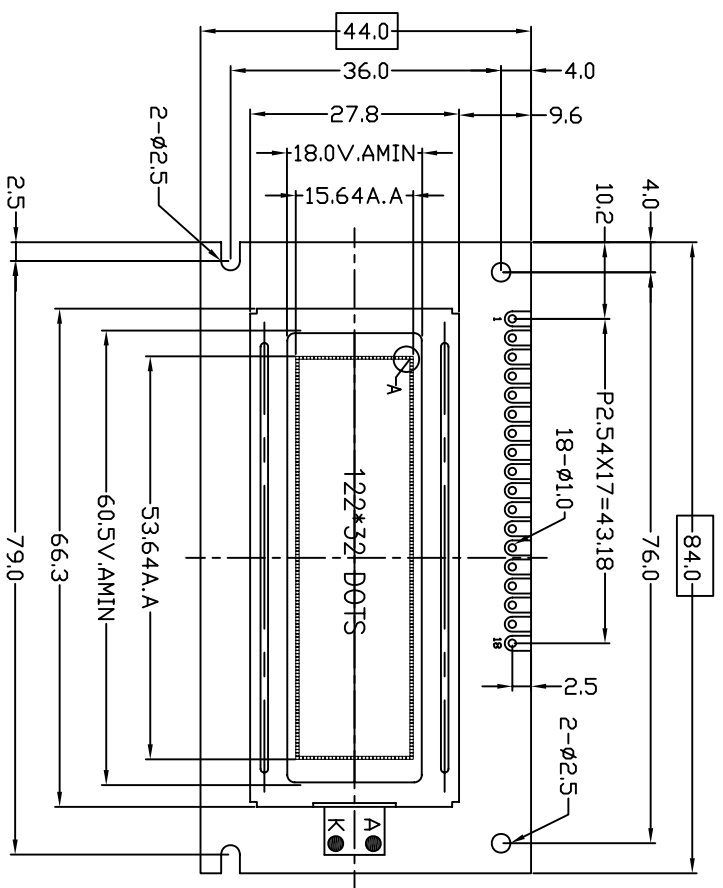

PIN No	1	2	3	4	5	6	7	8-15	16	17	18
Symbol	VSS	VDD	V0	A0	E	NC	RW	DB0-DB7	/RST	LEDA	LEDK

Note:

1. Display Mode:STN,Y/G, POSITIVE, Transflective
2. View Direction:6 O'Clock
3. Driver Method: 1/32 Duty, 1/6Bias
4. LCD Operating Voltage: 5. 0V
5. Operating Temperature: -0° C- 50° C
6. Storage Temperature: -20° C- 70° C
7. Controller: ST7920 COB
8. LED: COLOR:YELLOW-GREEN 底光5. 0V

THE DIMENSION IN FRAME IS CRITICAL TO QUALITY

LED	G1223202C-L	1									
TK	G1223202C-K	1									
LCD	G1223202C-LCD	1									
PCB	G1223207C-B	1									
SYMBOL	ITEM OR CODE NO.	QT	REMARK	SYMBOL	ITEM OR CODE NO.	QT	REMARK				
TOLERANCE		>0~6	±0.10								
		>6~80	±0.20								
		>80~240	±0.30								
		>240~400	±0.50								
		// 1.0	±0.10								
			APPROVED								
				DRAWING No.:HG1223207C-YF60L-VA							
HT DISPLAY CO., LTD.				DRAWING TITLE:LCD MODULE							
				REV. : A							
				PROJECTION:							
				UNIT : MM							
				SHEET : 1/1							