

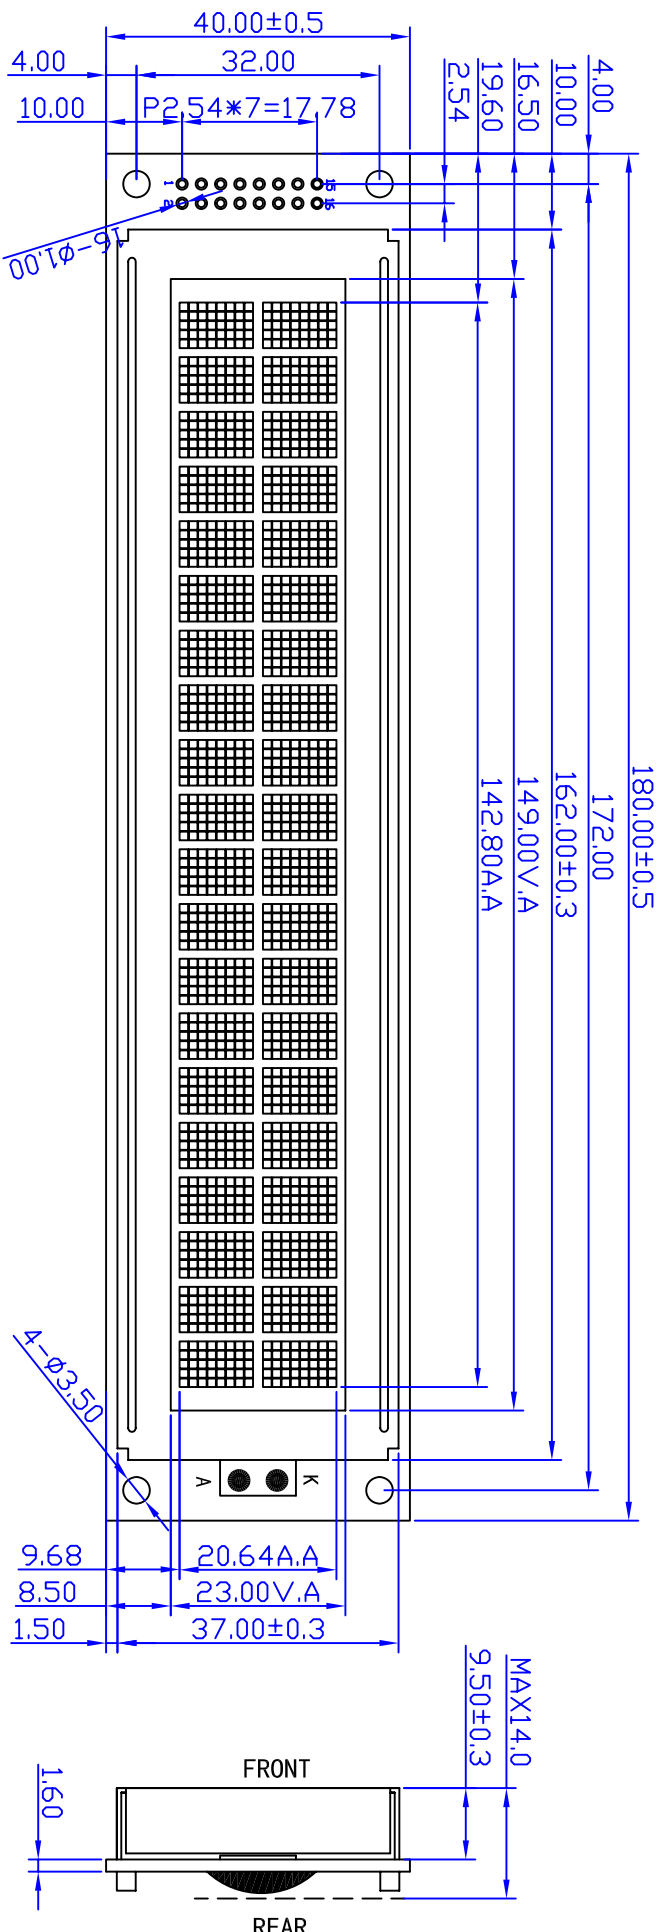


REV.	CHANGE CONTENT	BY	DATE

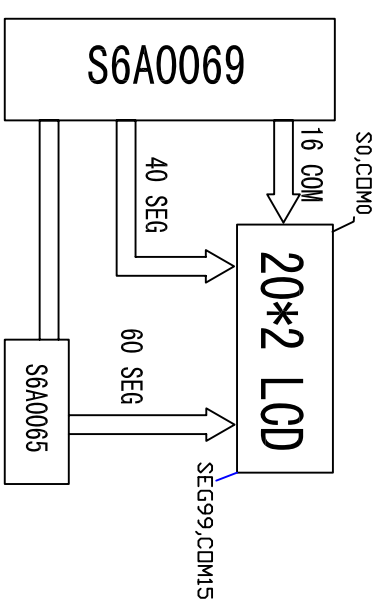

PIN NO.	1	2	3	4	5	6	7	8	9 ~ 16
SYMBOL	A	K	VSS	VDD	V0	RS	R/W	E	D0 ~ D7

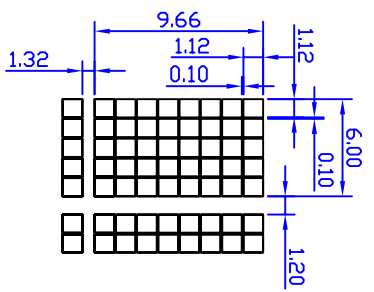

- NOTE:
1. DISPLAY TYPE: STN, POSITIVE, TRANSPARENT, Y-G
 2. VIEWING DIR: 6:00
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, Vop 4.4V VDD=5.0V
 4. DR. TEMP: 0~50°C
 5. ST. TEMP: -10~60°C
 6. DRIVER IC: S6A0069 S6A0065
 7. LED B/L: VF=4.2±0.15V, IF=500mA

COLOR: Y/G

TOLERANCE	HTD DISPLAY CO., LTD.	DRAWING No. : HC200202C-YF60L-VA
>0~6 ±0.10	DESIGN	ZOYS
>6~80 ±0.20	CHECKED	TECHNOLOGY
>80~240 ±0.30	APPROVED	Q.A
>240~400 ±0.50		
// 1.0 ±0.10		

HTD DISPLAY CO., LTD.

DRAWING TITLE: LCM DRAWING

REV. : A
SCALE : -
UNIT : mm
SHEET : 1/1