

## Normally – OFF Silicon Carbide Junction Transistor


$V_{DS}$	=	1700 V
$R_{DS(ON)}$	=	20 mΩ
$I_D$ ( $T_C = 25^\circ\text{C}$ )	=	100 A
$I_D$ ( $T_C > 125^\circ\text{C}$ )	=	50 A
$h_{FE}$ ( $T_C = 25^\circ\text{C}$ )	=	104

### Features


- 175 °C Maximum Operating Temperature
- Gate Oxide Free SiC Switch
- Exceptional Safe Operating Area
- Excellent Gain Linearity
- Temperature Independent Switching Performance
- Low Output Capacitance
- Positive Temperature Coefficient of  $R_{DS,ON}$
- Suitable for Connecting an Anti-parallel Diode

### Package

- RoHS Compliant



TO-247



### Advantages

- Compatible with Si MOSFET/IGBT Gate Drive ICs
- > 20 μs Short-Circuit Withstand Capability
- Lowest-in-class Conduction Losses
- High Circuit Efficiency
- Minimal Input Signal Distortion
- High Amplifier Bandwidth

### Applications

- Down Hole Oil Drilling, Geothermal Instrumentation
- Hybrid Electric Vehicles (HEV)
- Solar Inverters
- Switched-Mode Power Supply (SMPS)
- Power Factor Correction (PFC)
- Induction Heating
- Uninterruptible Power Supply (UPS)
- Motor Drives

## Table of Contents

Section I: Absolute Maximum Ratings .....	1
Section II: Static Electrical Characteristics.....	2
Section III: Dynamic Electrical Characteristics .....	2
Section IV: Figures .....	3
Section V: Driving the GA50JT17-247.....	7
Section VI: Package Dimensions .....	11
Section VII: SPICE Model Parameters .....	12

### Section I: Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit	Notes
Drain – Source Voltage	$V_{DS}$	$V_{GS} = 0\text{ V}$	1700	V	
Continuous Drain Current	$I_D$	$T_C = 25^\circ\text{C}$	100	A	Fig. 17
Continuous Drain Current	$I_D$	$T_C = 145^\circ\text{C}$	50	A	Fig. 17
Continuous Gate Current	$I_G$		3.5	A	
Turn-Off Safe Operating Area	RBSOA	$T_{VJ} = 175^\circ\text{C}$ , Clamped Inductive Load	$I_{D,max} = 50$ @ $V_{DS} \leq V_{DSmax}$	A	Fig. 19
Short Circuit Safe Operating Area	SCSOA	$T_{VJ} = 175^\circ\text{C}$ , $I_G = 1\text{ A}$ , $V_{DS} = 1200\text{ V}$ , Non Repetitive	>20	μs	
Reverse Gate – Source Voltage	$V_{SG}$		30	V	
Reverse Drain – Source Voltage	$V_{SD}$		25	V	
Power Dissipation	$P_{tot}$	$T_C = 25^\circ\text{C} / 145^\circ\text{C}$ , $t_p > 100\text{ ms}$	583 / 116	W	Fig. 16
Storage Temperature	$T_{stg}$		-55 to 175	°C	

## Section II: Static Electrical Characteristics

Parameter	Symbol	Conditions	Value			Unit	Notes
			Min.	Typical	Max.		
A: On State							
Drain – Source On Resistance	R <sub>DS(ON)</sub>	I <sub>D</sub> = 50 A, T <sub>J</sub> = 25 °C		20		mΩ	Fig. 4
		I <sub>D</sub> = 50 A, T <sub>J</sub> = 150 °C		36			
		I <sub>D</sub> = 50 A, T <sub>J</sub> = 175 °C		42			
Gate – Source Saturation Voltage	V <sub>GS,SAT</sub>	I <sub>D</sub> = 50 A, I <sub>D</sub> /I <sub>G</sub> = 40, T <sub>J</sub> = 25 °C		3.42		V	Fig. 7
		I <sub>D</sub> = 50 A, I <sub>D</sub> /I <sub>G</sub> = 30, T <sub>J</sub> = 175 °C		3.23			
DC Current Gain	h <sub>FE</sub>	V <sub>DS</sub> = 8 V, I <sub>D</sub> = 50 A, T <sub>J</sub> = 25 °C		104		–	Fig. 5
		V <sub>DS</sub> = 8 V, I <sub>D</sub> = 50 A, T <sub>J</sub> = 125 °C		65			
		V <sub>DS</sub> = 8 V, I <sub>D</sub> = 50 A, T <sub>J</sub> = 175 °C		58			
B: Off State							
Drain Leakage Current	I <sub>DSS</sub>	V <sub>DS</sub> = 1700 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 25 °C		0.5		μA	Fig. 8
		V <sub>DS</sub> = 1700 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 150 °C		1			
		V <sub>DS</sub> = 1700 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 175 °C		3			
Gate Leakage Current	I <sub>SG</sub>	V <sub>SG</sub> = 20 V, T <sub>J</sub> = 25 °C		20		nA	
C: Thermal							
Thermal resistance, junction - case	R <sub>th,JC</sub>			0.26		°C/W	Fig. 20

## Section III: Dynamic Electrical Characteristics

Parameter	Symbol	Conditions	Value			Unit	Notes
			Min.	Typical	Max.		
A: Capacitance and Gate Charge							
Input Capacitance	C <sub>iSS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 1200 V, f = 1 MHz		7205		pF	Fig. 9
Reverse Transfer/Output Capacitance	C <sub>rss</sub> /C <sub>oss</sub>	V <sub>DS</sub> = 1200 V, f = 1 MHz		120		pF	Fig. 9
Output Capacitance Stored Energy	E <sub>OSS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 1200 V, f = 1 MHz		100		μJ	Fig. 10
Effective Output Capacitance, time related	C <sub>oss,tr</sub>	I <sub>D</sub> = constant, V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 0 ... 1200 V		194		pF	
Effective Output Capacitance, energy related	C <sub>oss,er</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 0 ... 1200 V		139		pF	
Gate-Source Charge	Q <sub>GS</sub>	V <sub>GS</sub> = -5...3 V		55		nC	
Gate-Drain Charge	Q <sub>GD</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 0 ... 1200 V		233		nC	
Gate Charge - Total	Q <sub>G</sub>			288		nC	
B: Switching <sup>1</sup>							
Internal Gate Resistance – zero bias	R <sub>G(INT-ZERO)</sub>	f = 1 MHz, V <sub>AC</sub> = 50 mV, V <sub>DS</sub> = 0 V, V <sub>GS</sub> = 0 V, T <sub>j</sub> = 175 °C		0.59		Ω	
Internal Gate Resistance – ON	R <sub>G(INT-ON)</sub>	V <sub>GS</sub> > 2.5 V, V <sub>DS</sub> = 0 V, T <sub>j</sub> = 175 °C		0.09		Ω	
Turn On Delay Time	t <sub>d(on)</sub>	T <sub>j</sub> = 25 °C, V <sub>DS</sub> = 1200 V, I <sub>D</sub> = 50 A, Inductive Load		17		ns	
Fall Time, V <sub>DS</sub>	t <sub>f</sub>	Refer to Section V for additional driving information.		47		ns	Fig. 11, 13
Turn Off Delay Time	t <sub>d(off)</sub>			39		ns	
Rise Time, V <sub>DS</sub>	t <sub>r</sub>			25		ns	Fig. 12, 14
Turn On Delay Time	t <sub>d(on)</sub>			17		ns	
Fall Time, V <sub>DS</sub>	t <sub>f</sub>	T <sub>j</sub> = 175 °C, V <sub>DS</sub> = 1200 V, I <sub>D</sub> = 50 A, Inductive Load		47		ns	Fig. 11
Turn Off Delay Time	t <sub>d(off)</sub>			44		ns	
Rise Time, V <sub>DS</sub>	t <sub>r</sub>			23		ns	Fig. 12
Turn-On Energy Per Pulse	E <sub>on</sub>	T <sub>j</sub> = 25 °C, V <sub>DS</sub> = 1200 V, I <sub>D</sub> = 50 A, Inductive Load		1830		μJ	Fig. 11, 13
Turn-Off Energy Per Pulse	E <sub>off</sub>			628		μJ	Fig. 12, 14
Total Switching Energy	E <sub>tot</sub>	Refer to Section V.		2458		μJ	
Turn-On Energy Per Pulse	E <sub>on</sub>			1800		μJ	Fig. 11
Turn-Off Energy Per Pulse	E <sub>off</sub>	T <sub>j</sub> = 175 °C, V <sub>DS</sub> = 1200 V, I <sub>D</sub> = 50 A, Inductive Load		577		μJ	Fig. 12
Total Switching Energy	E <sub>tot</sub>			2377		μJ	

<sup>1</sup> – All times are relative to the Drain-Source Voltage  $V_{DS}$

## Section IV: Figures

### A: Static Characteristic Figures

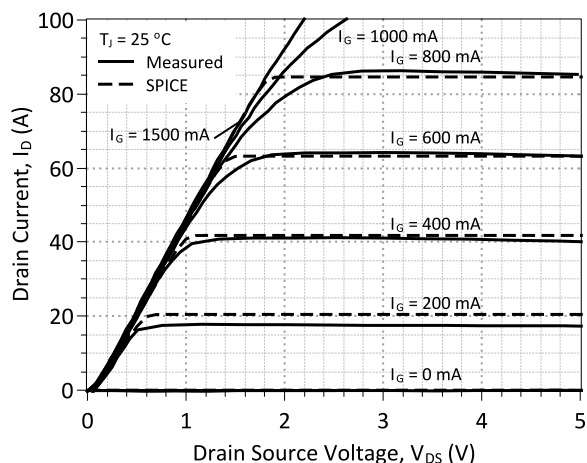


Figure 1: Typical Output Characteristics at 25 °C

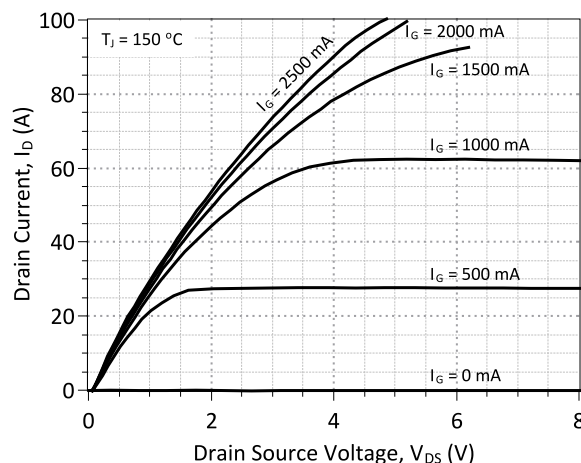


Figure 2: Typical Output Characteristics at 150 °C

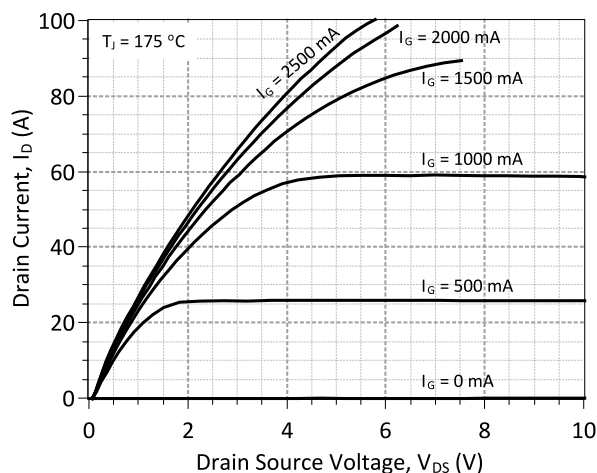


Figure 3: Typical Output Characteristics at 175 °C

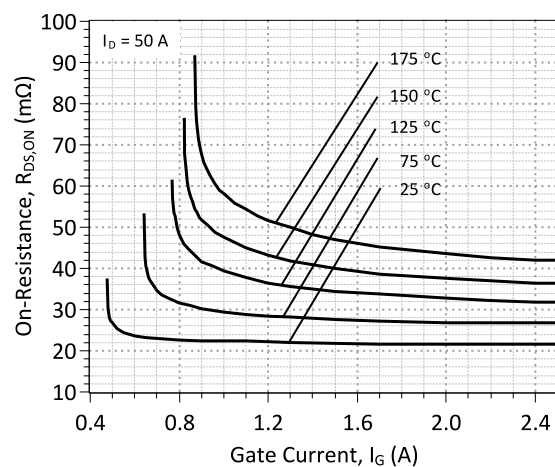


Figure 4: On-Resistance vs. Gate Current

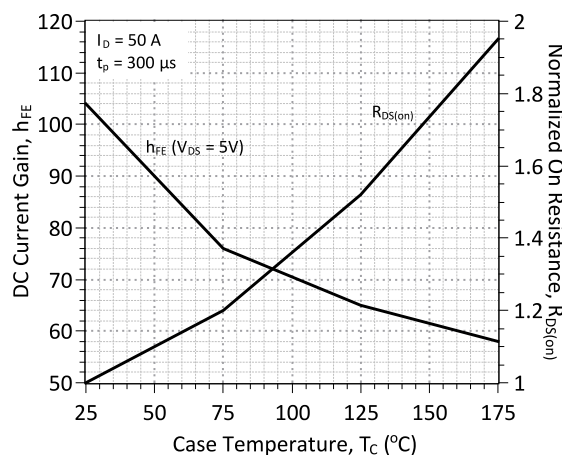


Figure 5: DC Current Gain and Normalized On-Resistance vs. Temperature



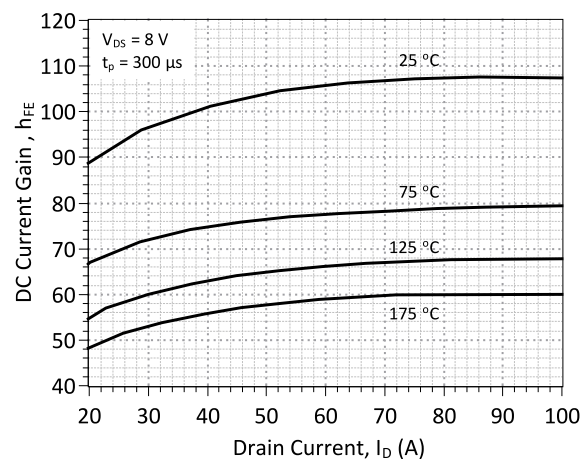


Figure 6: DC Current Gain vs. Drain Current

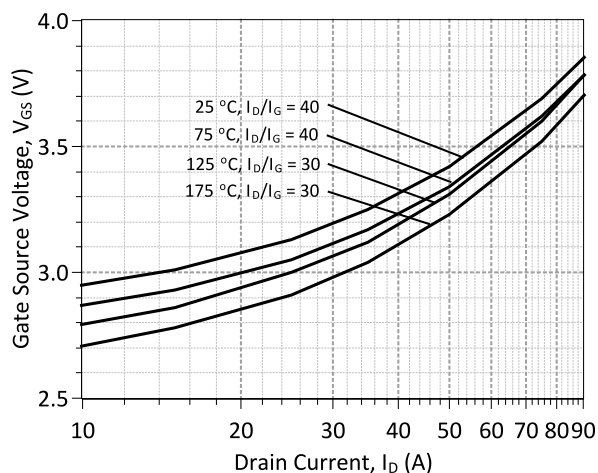


**Figure 7: Typical Gate – Source Saturation Voltage**

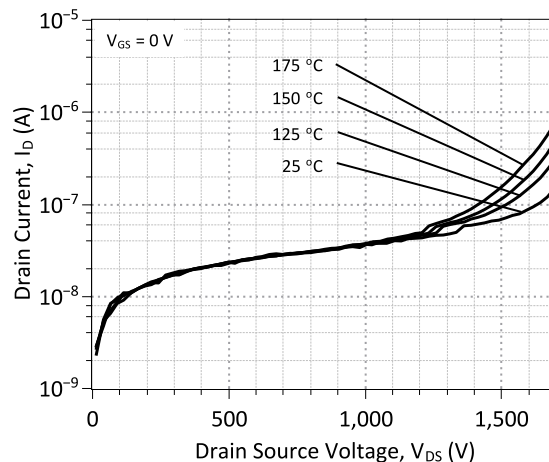


**Figure 8: Typical Blocking Characteristics**


### B: Dynamic Characteristic Figures

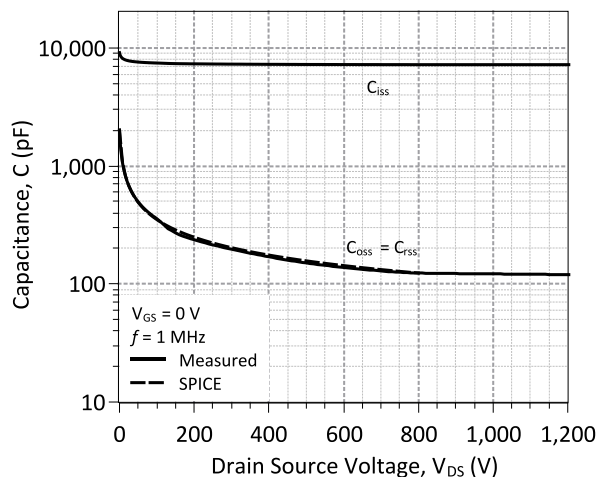


**Figure 9: Input, Output, and Reverse Transfer Capacitance**

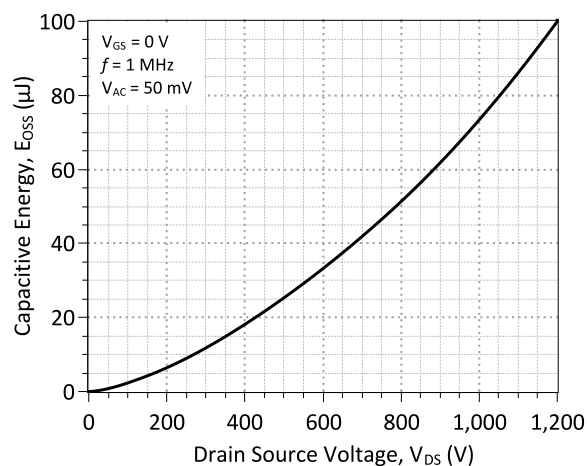


**Figure 10: Energy Stored in Output Capacitance**

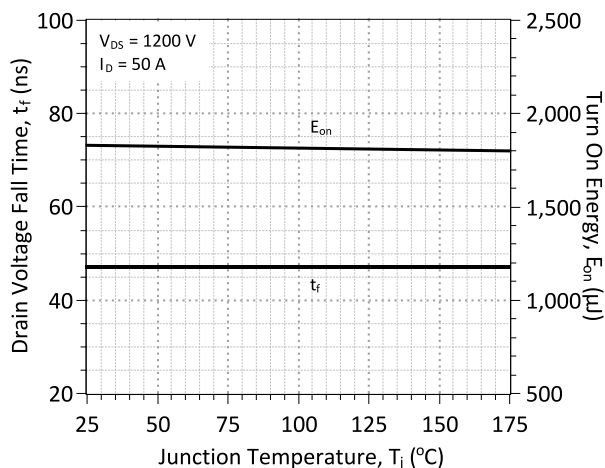


**Figure 11: Typical Switching Times and Turn On Energy Losses vs. Temperature**

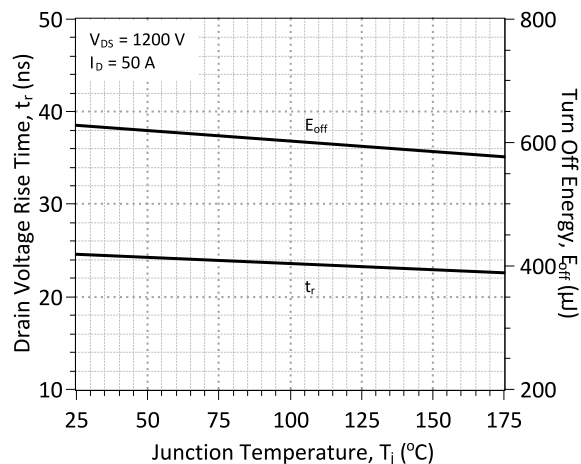

**Figure 12: Typical Switching Times and Turn Off Energy Losses vs. Temperature**

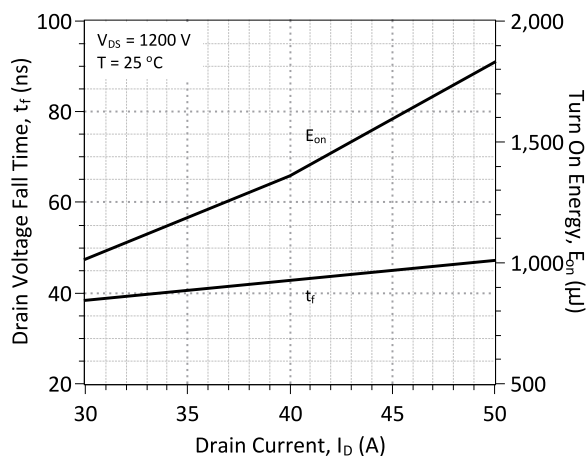


**Figure 13: Typical Switching Times and Turn On Energy Losses vs. Drain Current**

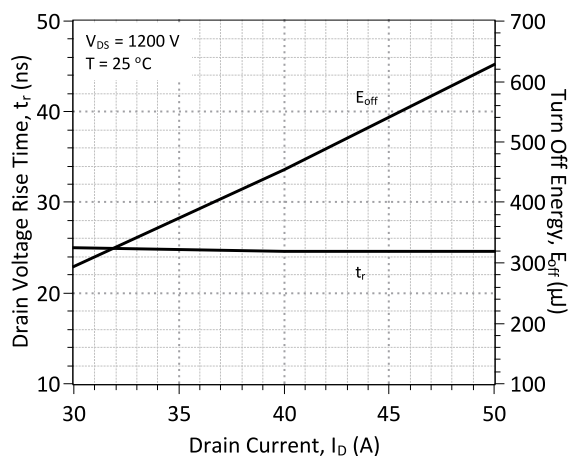


**Figure 14: Typical Switching Times and Turn Off Energy Losses vs. Drain Current**


### C: Device Derating Figures

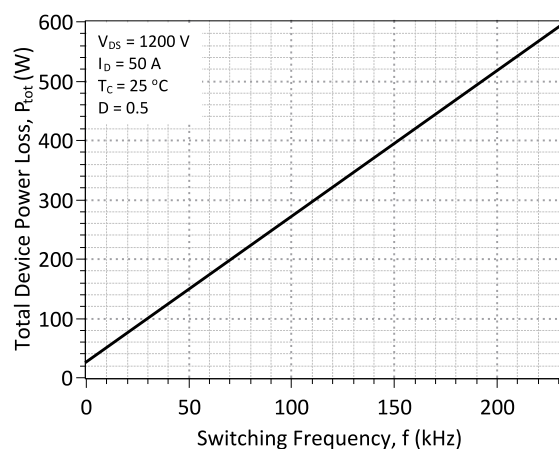


**Figure 15: Typical Hard Switched Device Power Loss vs. Switching Frequency<sup>2</sup>**

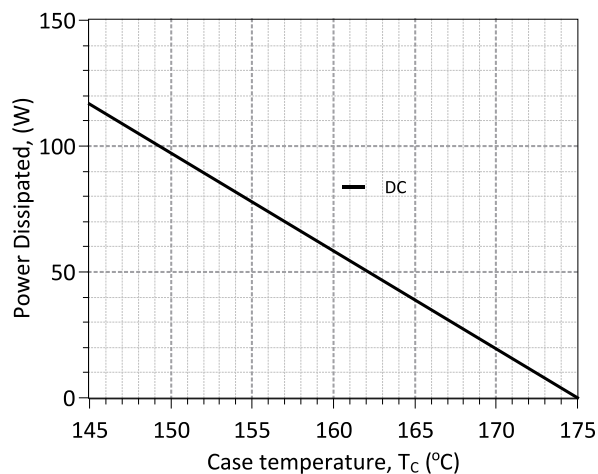

**Figure 16: Power Derating Curve**

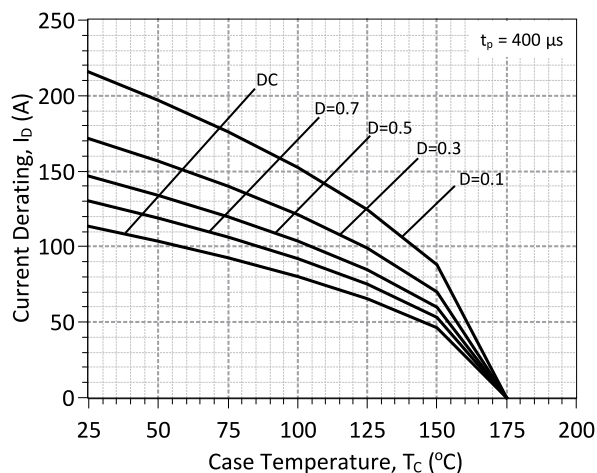


**Figure 17: Drain Current Derating vs. Temperature**

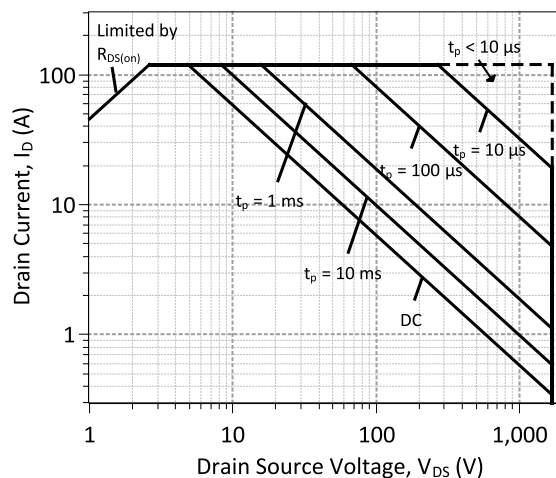


**Figure 18: Forward Bias Safe Operating Area at T<sub>C</sub> = 25 °C**


<sup>2</sup> – Representative values based on device conduction and switching loss. Actual losses will depend on gate drive conditions, device load, and circuit topology.

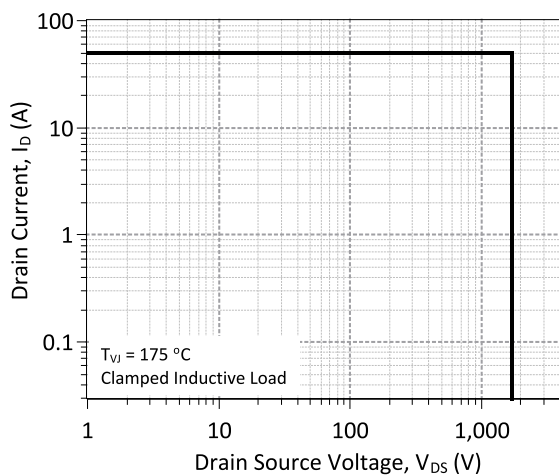

**Figure 19: Turn-Off Safe Operating Area**

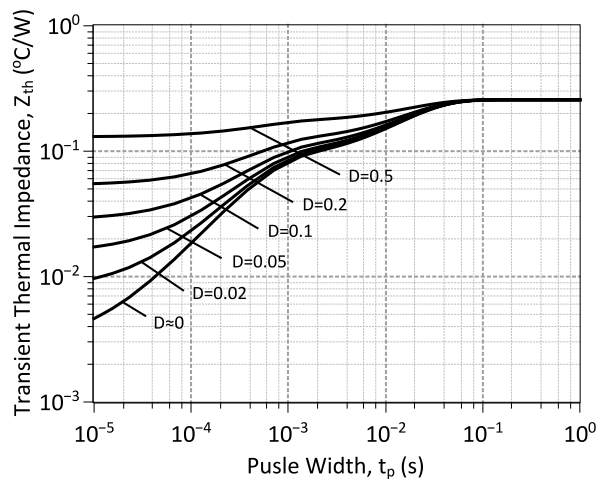

**Figure 20: Transient Thermal Impedance**

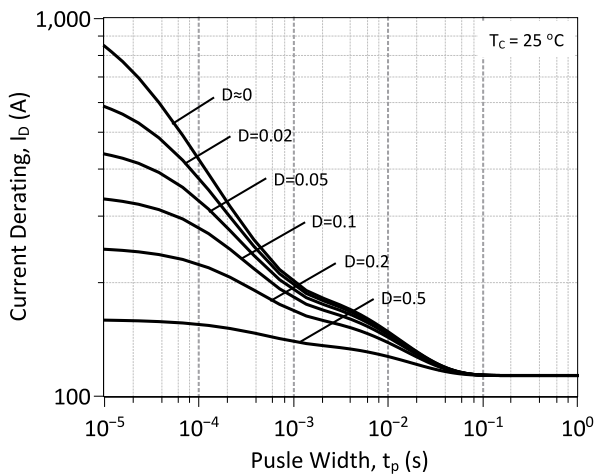

**Figure 21: Drain Current Derating vs. Pulse Width**


**Section V: Driving the GA50JT17-247**

Drive Topology	Gate Drive Power Consumption	Switching Frequency	Application Emphasis	Availability
TTL Logic	High	Low	Wide Temperature Range	Coming Soon
Constant Current	Medium	Medium	Wide Temperature Range	Coming Soon
High Speed – Boost Capacitor	Medium	High	Fast Switching	Production
High Speed – Boost Inductor	Low	High	Ultra Fast Switching	Coming Soon
Proportional	Lowest	High	Wide Drain Current Range	Coming Soon
Pulsed Power	Medium	N/A	Pulse Power	Coming Soon


**A: Static TTL Logic Driving**

The GA50JT17-247 may be driven using direct (5 V) TTL logic after current amplification. The (amplified) current level of the supply must meet or exceed the steady state gate current ( $I_{G,steady}$ ) required to operate the GA50JT17-247. The power level of the supply can be estimated from the target duty cycle of the particular application.  $I_{G,steady}$  is dependent on the anticipated drain current  $I_D$  through the SJT and the DC current gain  $h_{FE}$ , it may be calculated from the following equation. An accurate value of the  $h_{FE}$  may be read from Figure 6.

$$I_{G,steady} \approx \frac{I_D}{h_{FE}(T, I_D)} * 1.5$$

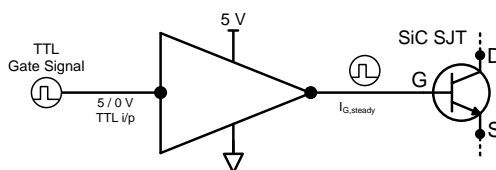
**Figure 22: TTL Gate Drive Schematic**
**B: High Speed Driving**

The SJT is a current controlled transistor which requires a positive gate current for turn-on as well as to remain in on-state. An ideal gate current waveform for ultra-fast switching of the SJT, while maintaining low gate drive losses, is shown in Figure 23 which features a positive current peak during turn-on, a negative current peak during turn-off, and continuous gate current to remain on.

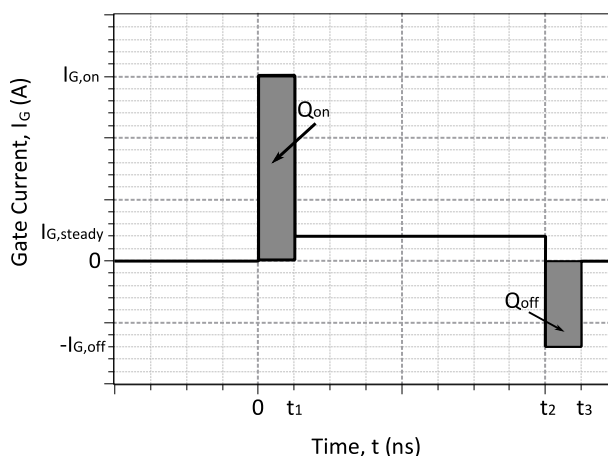
**Figure 23: An idealized gate current waveform for fast switching of an SJT.**

An SJT is rapidly switched from its blocking state to on-state, when the necessary gate charge,  $Q_G$ , for turn-on is supplied by a burst of high gate current,  $I_{G,on}$ , until the gate-source capacitance,  $C_{GS}$ , and gate-drain capacitance,  $C_{GD}$ , are fully charged.

$$Q_{on} = I_{G,on} * t_1$$

$$Q_{on} \geq Q_{gs} + Q_{gd}$$


Ideally,  $I_{G,pon}$  should terminate when the drain voltage falls to its on-state value in order to avoid unnecessary drive losses during the steady on-state. In practice, the rise time of the  $I_{G,on}$  pulse is affected by the parasitic inductances,  $L_{par}$  in the device package and drive circuit. A voltage developed across the parasitic inductance in the source path,  $L_s$ , can de-bias the gate-source junction, when high drain currents begin to flow through the device. The voltage applied to the gate pin should be maintained high enough, above the  $V_{GS,sat}$  (see **Error! Reference source not found.**) level to counter these effects.

A high negative peak current,  $-I_{G,off}$  is recommended at the start of the turn-off transition, in order to rapidly sweep out the injected carriers from the gate, and achieve rapid turn-off. While satisfactory turn off can be achieved with  $V_{GS} = 0$  V, a negative gate voltage  $V_{GS}$  may be used in order to speed up the turn-off transition.

Two high-speed drive topologies for the SiC SJTs are presented below.

### B:1: High Speed, Low Loss Drive with Boost Capacitor, GA03IDDJT30-FR4

The GA50JT17-247 may be driven using a High Speed, Low Loss Drive with Boost Capacitor topology in which multiple voltage levels, a gate resistor, and a gate capacitor are used to provide fast switching current peaks at turn-on and turn-off and a continuous gate current while in on-state. A 3 kV isolated evaluation gate drive board (GA03IDDJT30-FR4) utilizing this topology is commercially available for high and low-side driving, its datasheet provides additional details about this drive topology.

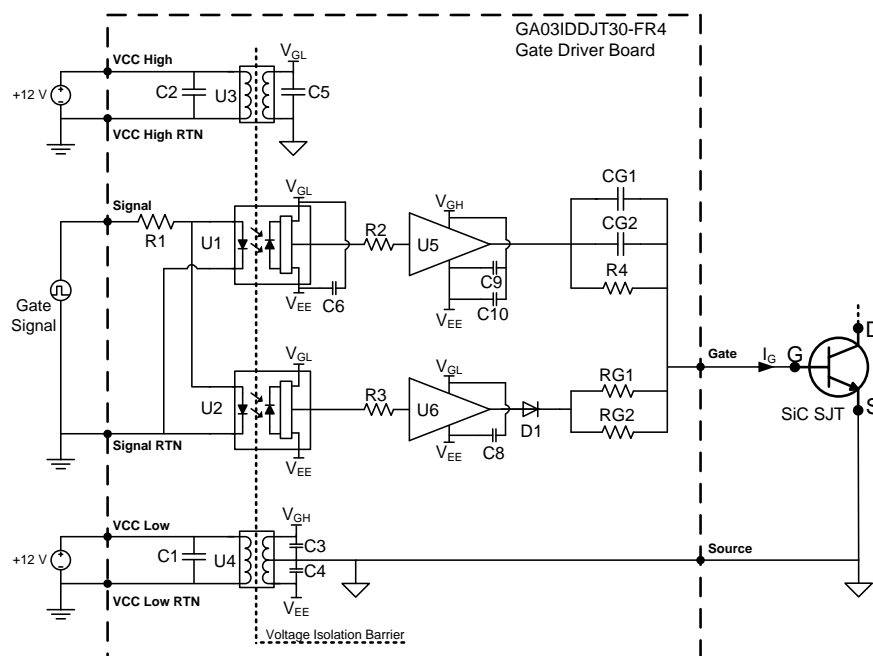

**Figure 24: Topology of the GA03IDDJT30-FR4 Two Voltage Source gate driver.**


The GA03IDDJT30-FR4 evaluation board comes equipped with two on board gate drive resistors ( $R_{G1}$ ,  $R_{G2}$ ) pre-installed for an effective gate resistance<sup>3</sup> of  $R_G = 3.75 \Omega$ . It may be necessary for the user to reduce  $R_{G1}$  and  $R_{G2}$  under high drain current conditions for safe operation of the GA50JT17-247. The steady state current supplied to the gate pin of the GA50JT17-247 with on-board  $R_G = 3.75 \Omega$ , is shown in Figure 25. The maximum allowable safe value of  $R_G$  for the user's required drain current can be read from Figure 26.

**For the GA50JT17-247,  $R_G$  must be reduced for  $I_D \geq \sim 14$  A for safe operation with the GA03IDDJT30-FR4.**


For operation at  $I_D \geq \sim 14$  A,  $R_G$  may be calculated from the following equation, which contains the DC current gain  $h_{FE}$  (Figure 6) and the gate-source saturation voltage  $V_{GS,sat}$  (**Error! Reference source not found.**).

$$R_{G,max} = \frac{(4.7V - V_{GS,sat}) * h_{FE}(T, I_D)}{I_D * 1.5} - 0.6\Omega$$



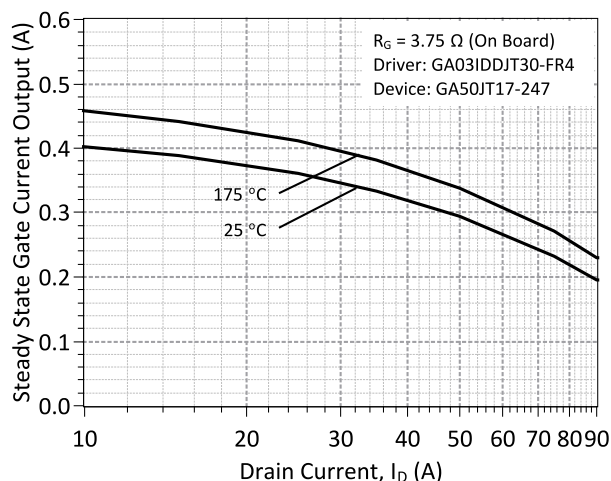


**Figure 25: Typical steady state gate current supplied by the GA03IDDJT30-FR4 board for the GA50JT17-247 with the on board resistance of 3.75 Ω**

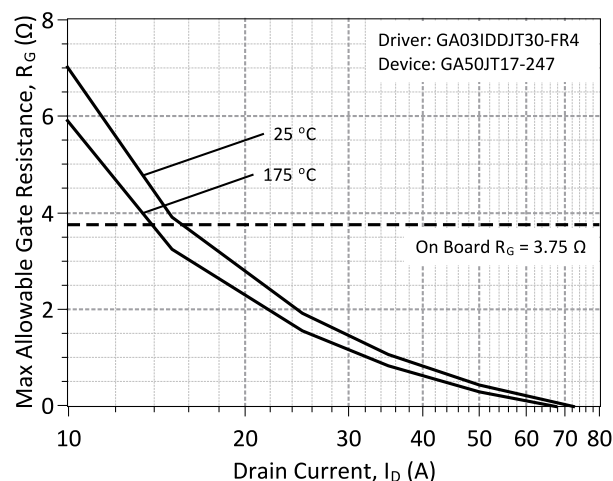

**Figure 26: Maximum gate resistance for safe operation of the GA50JT17-247 at different drain currents using the GA03IDDJT30-FR4 board.**

## B:2: High Speed, Low Loss Drive with Boost Inductor

A High Speed, Low-Loss Driver with Boost Inductor is also capable of driving the GA50JT17-247 at high-speed. It utilizes a gate drive inductor instead of a capacitor to provide the high-current gate current pulses  $I_{G,on}$  and  $I_{G,off}$ . During operation, inductor  $L$  is charged to a specified  $I_{G,on}$  current value then made to discharge  $I_L$  into the SiC gate pin using logic control of  $S_1$ ,  $S_2$ ,  $S_3$ , and  $S_4$ , as shown in Figure 27. After turn on, while the device remains on the necessary steady state gate current  $I_{G,steady}$  is supplied from source  $V_{CC}$  through  $R_G$ . Please refer to the article "A current-source concept for fast and efficient driving of silicon carbide transistors" by Dr. Jacek Rąbkowski for additional information on this driving topology.<sup>4</sup>

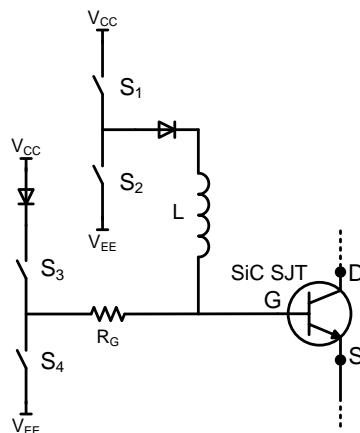

**Figure 27: Simplified Inductive Pulsed Drive Topology**

<sup>3</sup> –  $R_G = (1/RG1 + 1/RG2)^{-1}$ . Driver is pre-installed with  $RG1 = RG2 = 7.5 \Omega$


<sup>4</sup> – Archives of Electrical Engineering. Volume 62, Issue 2, Pages 333–343, ISSN (Print) 0004-0746, DOI: 10.2478/ae-2013-0026, June 2013

## C: Proportional Gate Current Driving

For applications in which the GA50JT17-247 will operate over a wide range of drain current conditions, it may be beneficial to drive the device using a proportional gate drive topology to optimize gate drive power consumption. A proportional gate driver relies on instantaneous drain current  $I_D$  feedback to vary the steady state gate current  $I_{G,steady}$  supplied to the GA50JT17-247

### C:1: Voltage Controlled Proportional Driver


The voltage controlled proportional driver relies on a gate drive IC to detect the GA50JT17-247 drain-source voltage  $V_{DS}$  during on-state to sense  $I_D$ . The gate drive IC will then increase or decrease  $I_{G,steady}$  in response to  $I_D$ . This allows  $I_{G,steady}$ , and thus the gate drive power consumption, to be reduced while  $I_D$  is relatively low or for  $I_{G,steady}$  to increase when  $I_D$  is higher. A high voltage diode connected between the drain and sense protects the IC from high-voltage when the driver and GA50JT17-247 are in off-state. A simplified version of this topology is shown in Figure 29, additional information will be available in the future at <http://www.genesicsemi.com/commercial-sic/sic-junction-transistors/>

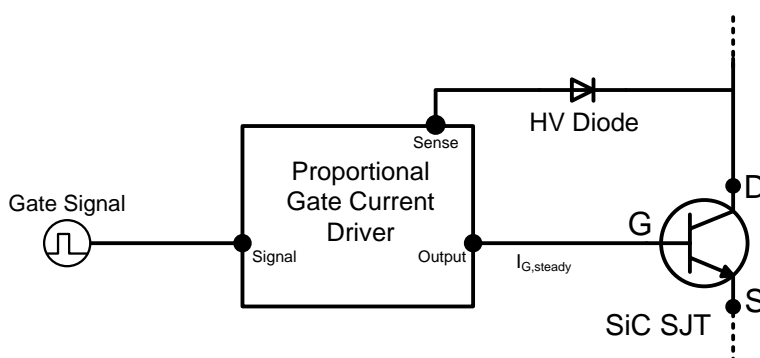


**Figure 28: Simplified Voltage Controlled Proportional Driver**

### C:2: Current Controlled Proportional Driver

The current controlled proportional driver relies on a low-loss transformer in the drain or source path to provide feedback  $I_D$  of the GA50JT17-247 during on-state to supply  $I_{G,steady}$  into the device gate.  $I_{G,steady}$  will then increase or decrease in response to  $I_D$  at a fixed forced current gain which is set by the turns ratio of the transformer,  $h_{force} = I_D / I_G = N_2 / N_1$ . GA50JT17-247 is initially tuned-on using a gate current pulse supplied into an RC drive circuit to allow  $I_D$  current to begin flowing. This topology allows  $I_{G,steady}$ , and thus the gate drive power consumption, to be reduced while  $I_D$  is relatively low or for  $I_{G,steady}$  to increase when  $I_D$  is higher. A simplified version of this topology is shown in Figure 29, additional information will be available in the future at <http://www.genesicsemi.com/commercial-sic/sic-junction-transistors/>.

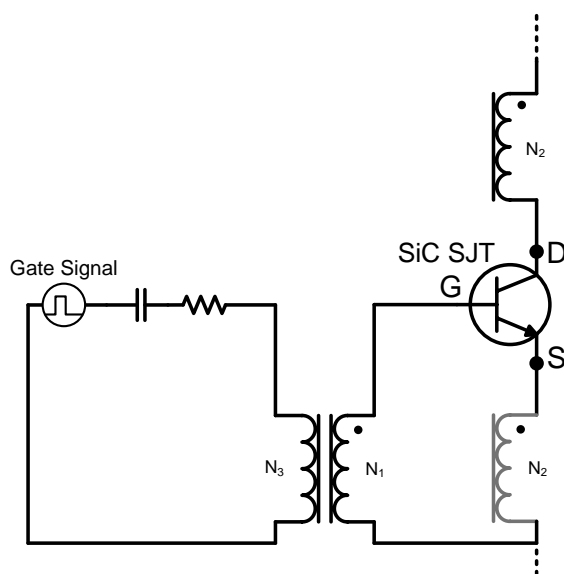

**Figure 29: Simplified Current Controlled Proportional Driver**

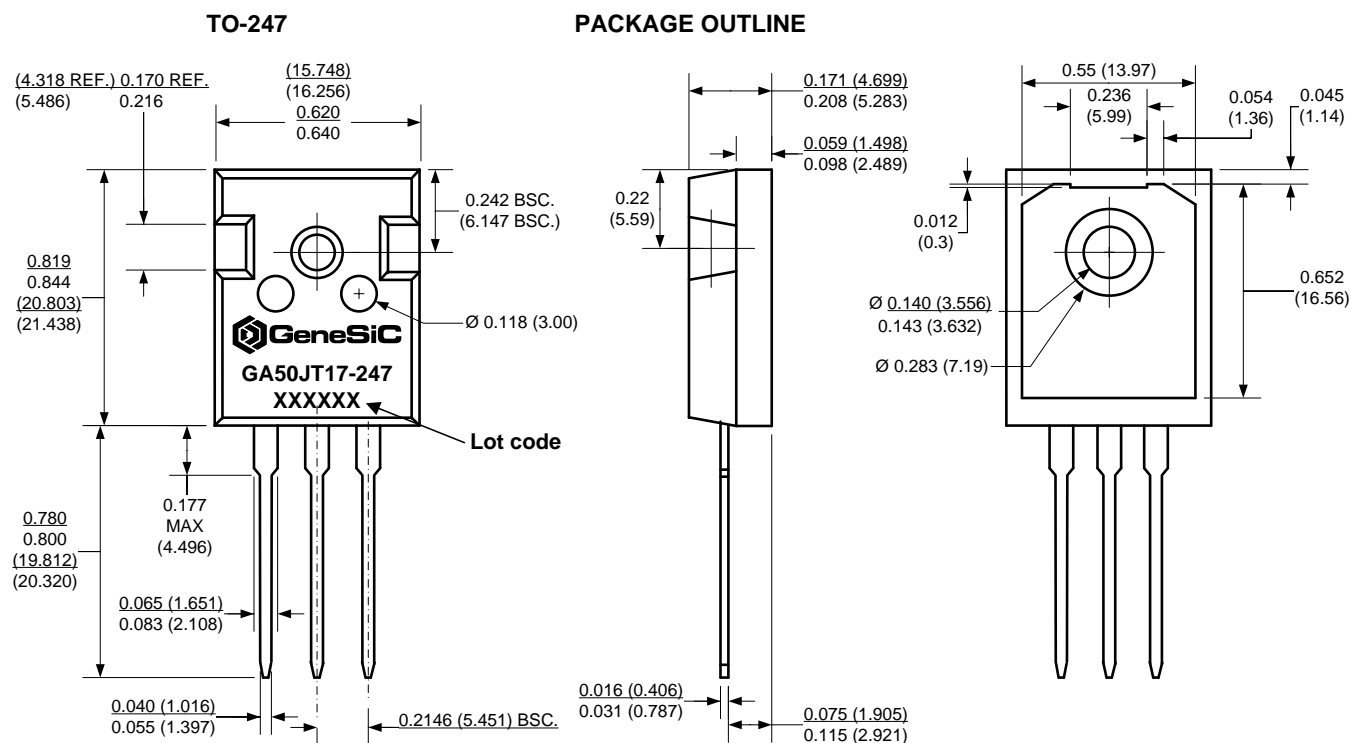**Section VI: Package Dimensions**

**NOTE**

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS

Revision History			
Date	Revision	Comments	Supersedes
2015/01/29	4	Updated Electrical Characteristics	
2014/12/18	3	Updated Electrical Characteristics	
2014/11/12	2	Updated Electrical Characteristics	
2014/08/20	1	Updated Electrical Characteristics	
2014/06/20	0	Initial release	

Published by  
 GeneSiC Semiconductor, Inc.  
 43670 Trade Center Place Suite 155  
 Dulles, VA 20166

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.

**Section VII: SPICE Model Parameters**

This is a secure document. Please copy this code from the SPICE model PDF file on our website ([http://www.genesicsemi.com/images/products\\_sic/sjt/GA50JT17-247\\_SPICE.pdf](http://www.genesicsemi.com/images/products_sic/sjt/GA50JT17-247_SPICE.pdf)) into LTSPICE (version 4) software for simulation of the GA50JT17-247.

```
*      MODEL OF GeneSiC Semiconductor Inc.
*
*      $Revision:   2.2                $
*      $Date:      29-JAN-2015        $
*
*      GeneSiC Semiconductor Inc.
*      43670 Trade Center Place Ste. 155
*      Dulles, VA 20166
*
*      COPYRIGHT (C) 2015 GeneSiC Semiconductor Inc.
*      ALL RIGHTS RESERVED
*
*      These models are provided "AS IS, WHERE IS, AND WITH NO WARRANTY
*      OF ANY KIND EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED
*      TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A
*      PARTICULAR PURPOSE."
*      Models accurate up to 2 times rated drain current.
*
.model GA50JT17 NPN
+ IS      9.833E-48
+ ISE     1.073E-26
+ EG      3.23
+ BF      110
+ BR      0.55
+ IKF     9000
+ NF      1
+ NE      2
+ RB      0.95
+ IRB     0.005
+ RBM     0.073
+ RE      0.005
+ RC      0.014
+ CJC     2.398E-9
+ VJC     2.8346
+ MJC     0.4846
+ CJE     6.026E-09
+ VJE     3.1791
+ MJE     0.5295
+ XTI     3
+ XTB     -1.5
+ TRC1    9.00E-3
+ VCEO    1700
+ ICRATING 50
+ MFG     GeneSiC_Semiconductor
*
*      End of GA50JT17 SPICE Model
```