



W005 THRU W10

www.DataSheet4U.com

SINGLE PHASE SILICON BRIDGE RECTIFIER


Reverse Voltage - 50 to 1000 Volts Forward Current - 1.5 Ampere

FEATURES

- Ideal for printed circuit board
- Surge overload rating: 50A peak
- High case dielectric strength

MECHANICAL DATA

- Case: UL-94 Class V-0 recognized Flame Retardant Epoxy
- Terminals: Plated leads solderable per MIL-STD 202E, method 208C
- Mounting Position: Any
- Weight: 1.10 g
- Marking: Type Number

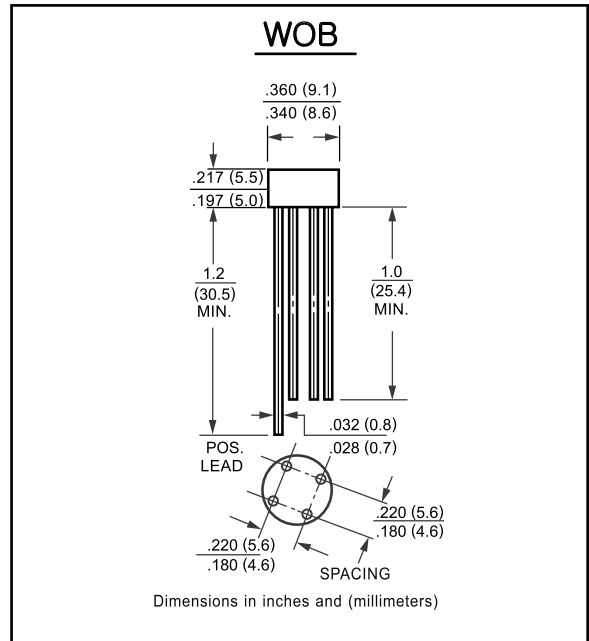

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

CHARACTERISTICS		SYMBOL	W005	W01	W02	W04	W06	W08	W10	UNITS
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage		V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Output Current at T _A = 25°C		I _O	1.5							A
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		I _{FSM}	50							A
Maximum DC Forward Voltage Drop per Bridge Element at 1.5A DC		V _F	1.0							V
Maximum Reverse Current at rated	@T _A = 25°C	I _R	10.0							uA
DC Blocking Voltage per element	@T _A = 125°C		500							
I ² t Rating for Fusing (t<8.3ms)		I ² t	10							A ² Sec
Typical Junction Capacitance (Note1)		C _J	24							pF
Typical Thermal Resistance (Note 2)		RθJ A	36							°C/W
Operating and Storage Temperature Range		T _J ,T _{STG}	-55 to + 150							°C

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts

2. Thermal Resistance from Junction to Ambient and from junction to lead mounted on P.C.B. with 0.5 x 0.5" (13x13mm) copper pads.



W005 THRU W10

RATINGS AND CHARACTERISTIC CURVES

www.DataSheet4U.com

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

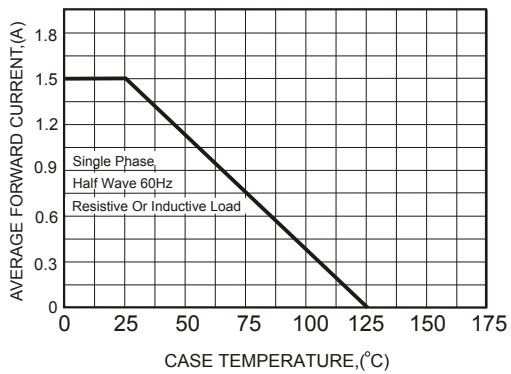


FIG.2-MAXIMUM NON-REPETITIVE FORWARD
SURGE CURRENT

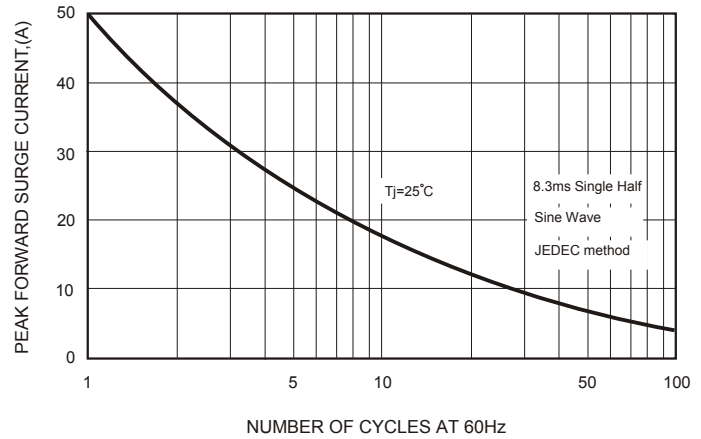


FIG.3-TYPICAL FORWARD
CHARACTERISTICS

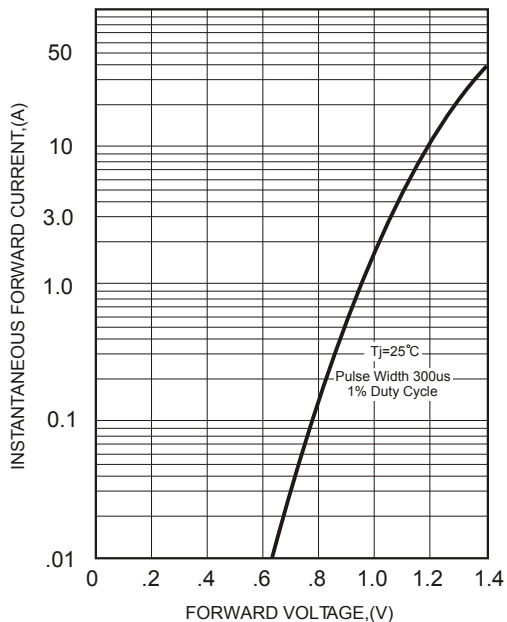


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

