

Features

- Operating Voltage: 2.4V~5.0V
- Directly drive an external transistor
- Low stand-by current
- 15 rhythms triggered by 16 keys
- 3Hz LED flash output
- 24 pin dual-in-line package

Applications


- Toys
- Sound effect generators


General Description

The HT3015A is a single-chip PCM rhythm generator implemented in the CMOS technology. The IC includes 16 keys and can generate 15 kinds of rhythm. While the IC is playing, an

LED flashes at a rate of 3Hz. Various types of timbre and rhythm can be generated by coding the internal ROM. The IC is offered in either a dice form or 24 pin dual-in-line package.

Pin Assignment

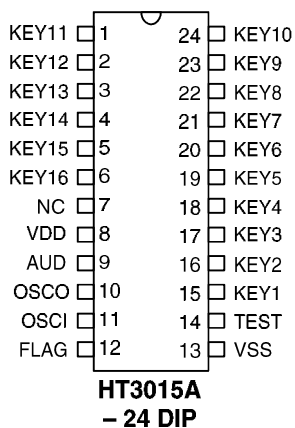

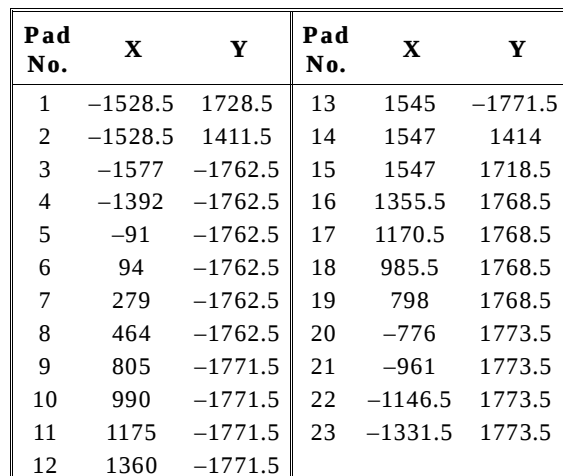Unit: μm 

Chip size: $3450 \times 3920 (\mu\text{m})^2$

* The substrate should be connected to VSS in the PCB layout artwork.

Pin Description

Pin No.	Pin Name	I/O	Internal Connection	Description
1~6, 15, 24	KEY1~KEY16	I	Pull-High	Trigger keys, low active, retriggerable keys
7	NC	—	—	No connection
8	VDD	I	—	Positive power supply
9	AUD	O	PMOS Output	Voice output for driving an external transistor
10	OSCO	O	—	Oscillator output pin
11	OSCI	I	—	Oscillator input pin
12	FLAG	O	NMOS Open Drain	3Hz flash, low active output, open drain
13	VSS	I	—	Negative power supply (GND)
14	TEST	I	Pull-High	For IC test only

Absolute Maximum Ratings

Supply Voltage -0.3V to 6.0V Storage Temperature..... -50°C to 125°C
 Input Voltage..... V_{SS}-0.3V to V_{DD}+0.3V Operating Temperature..... 0°C to 70°C

Electrical Characteristics

(T_a=25°C)

Symbol	Parameter	Test Condition		Min.	Typ.	Max.	Unit
		V _{DD}	Condition				
V _{DD}	Supply Voltage	—	—	2.4	—	5.0	V
I _{DD}	Operating Current	3V	No load	—	200	400	μA
I _{STB}	Stand-by Current	3V	—	—	1	5	μA
I _{AUD}	Max. AUD Output Current	3V	V _{OH} =0.6V	-1.5	-2	—	mA
I _{OL}	FLAG Sink Current	3V	V _{OL} =0.3V	1.5	3.0	—	mA
V _{IL}	“L” Input Voltage	—	—	—	—	0.2V _{DD}	V
V _{IH}	“H” Input Voltage	—	—	0.7V _{DD}	—	—	V
F _{OSC}	System Frequency	3V	R _{OSC} =100K	—	180	—	KHz

Functional Description

KEY2~KEY16

www.DataSheet4U.com

KEY2~KEY16 can individually play a section of the 15 built-in demo-rhythms 4 times continuously. Their corresponding rhythms are as follows:

KEY No.	Rhythm
KEY2	Latin fusion 1
KEY3	Latin fusion 2
KEY4	Latin ballad 1
KEY5	Latin ballad 2
KEY6	Latin ROCK 1
KEY7	Latin ROCK 2
KEY8	Latin fusion 3
KEY9	Samba 1
KEY10	Samba 2
KEY11	Son afro
KEY12	Mambo
KEY13	Latin ROCK 3
KEY14	Rhumba
KEY15	Cha Cha
KEY16	Samba 3

KEY1

KEY1 is a sequential input key. Pressing this key once plays the first rhythm, and re-pressing it plays the second rhythm, and so forth. Any key of KEY2~KEY16 can be pressed to reset KEY1 (return to the first section of the first group).

KEY priority

KEY1 > KEY2 > KEY3 > > KEY15 > KEY16


KEY features

Pull-high resistance: 100kΩ
Key-in debounce time: 22 ms

FLAG

3Hz flashing LED output during the playing of the IC, active low, NMOS open drain output

Timing Diagram

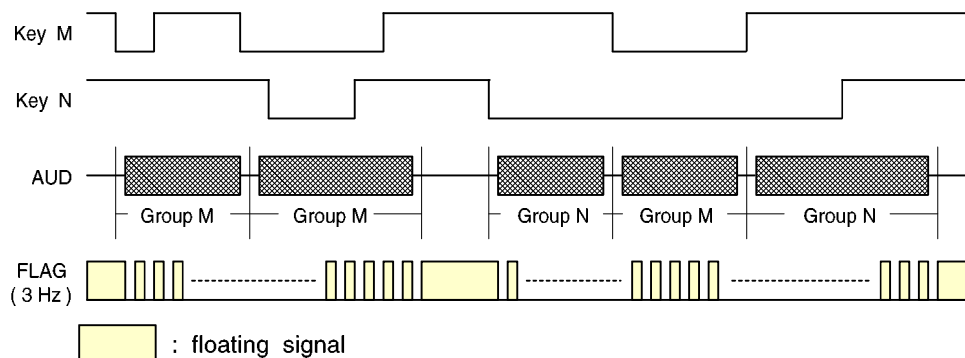


The key priority : Key M > Key N

Application Circuits

Chip form


www.DataSheet4U.com

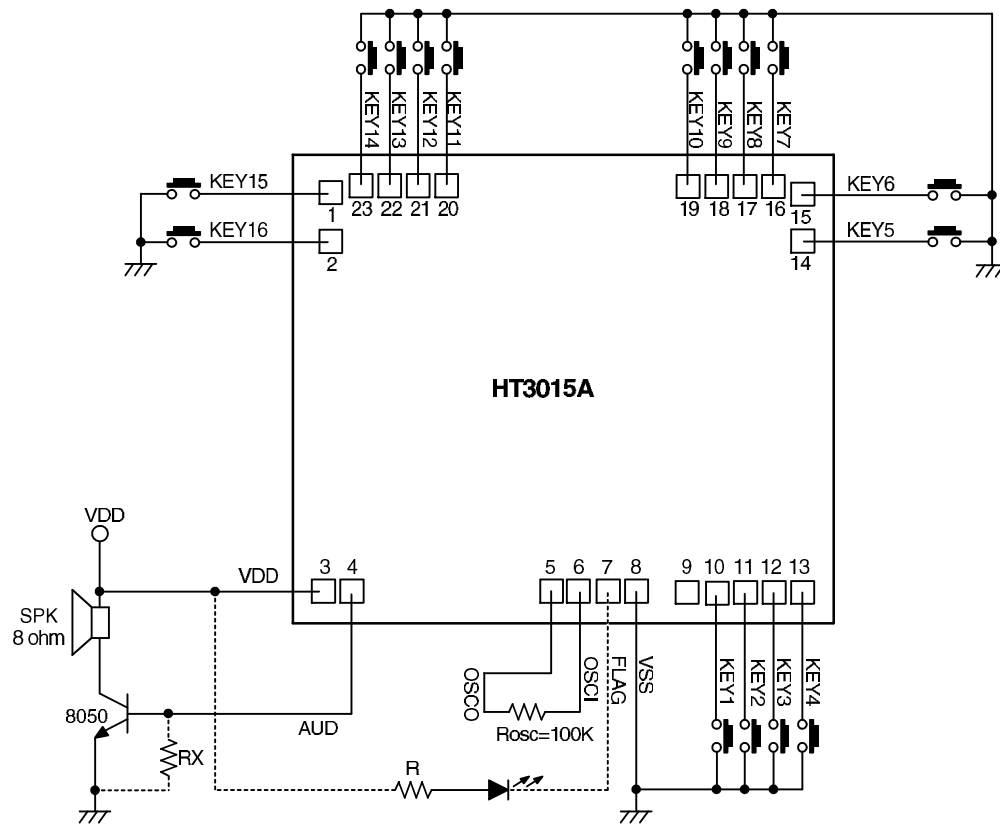

* Substrate should be connected to VSS in the PCB layout artwork.
 $R = 100 \sim 330 \Omega$
 $RX \cong 1K \Omega$ for $VDD = 4V \sim 5V$

Package form

www.DataSheet4U.com

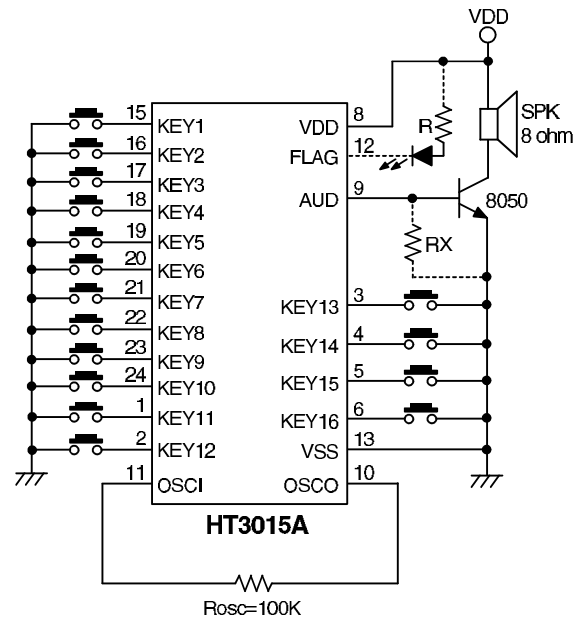

$R = 100 \sim 330 \Omega$
 $RX \approx 1K \Omega$ for $VDD = 4V \sim 5V$