

KA7524

LINEAR INTEGRATED CIRCUIT


POWER FACTOR CONTROLLER

DESCRIPTION

TheContek KA7524 provides the necessary features to implement the Electronic BALLAST control and S.M.P.S application for designing active power factor correction circuit


FEATURES

- *Internal self-starting
- *Micro power start up mode
- *Included under voltage lockout circuit
- *Internal 1% reference
- *High output current: peak 500mA



DIP-8

BLOCK DIAGRAM

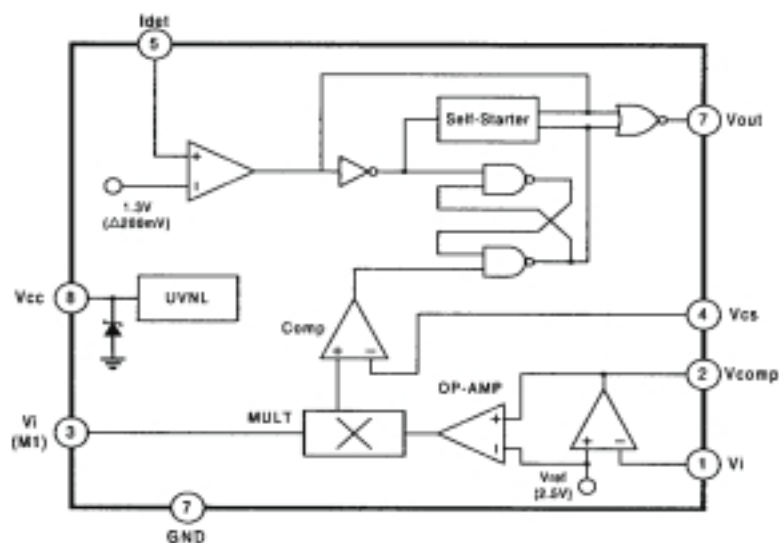

Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

ABSOLUTE MAXIMUM RATINGS(Ta=25 C)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V _{cc}	20	V
Peak Driver Output Current	I _{o(p)}	500	mA
Detect Clamping Diode Current	I _{det}	10	mA
Output Clamping Diode Current	I _{o(c.d)}	10	mA
Operating Temperature	T _{opr}	-45~65	C
Storage Temperature	T _{stg}	-65~150	C

ELECTRICAL CHARACTERISTICS (Ta=25 C)

(All voltage referenced to GND unless othrewise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Under Voltage Lockout Section						
Start Threshold Voltage	V _{th(st)}		9.2	10	10.8	V
UV lockout Hysteresis	V _{ths}		1.8	2.0	2.2	V
Supply Zener Voltage	V _z			17		V
Supply Current Section						
Start-up Supply Current	I _{start}	V _{cc} <V _{th}		0.25	0.5	mA
Operating Supply Current	I _{cc}	V _{cc} =12V, No load		6	12	mA
Dynamic Operating Current	I _{cc(d)}	V _{cc} =12V, f=50KHZ, C _{gs} =1000pF		10	20	mA
Reference Section (note 1)						
Reference Voltage	V _{ref}		2.475	2.5	2.525	V
Line Regulation	V _{ref}	12V<V _{cc} <16V		0.1	10	mV
Load Regulation	V _{ref}	0<I _{ref} <2mA		0.1	10	mV
Temperature Stability	ST _t			20		mV
Error Amplifier Section						
Input Offset Voltage	V _{io}		-15		15	mV
Input Bias Current	I _{bias}		-1	-0.1	1	μA
Large Signal Open Loop gain	G _v		60	100		dB
Power Supply Rejection Ratio	PSRR		60	86		dB
Output Current	I _{source}		2			mA
	I _{sink}				-2	mA
Output Voltage range	V _{o(p)}		1.2		4	V
Unity Gain Bandwidth	UBW			1.0		MHZ
Phase Margin	MPH			57		C



ELECTRICAL CHARACTERISTICS (Ta=25 °C) (continued)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Multiplier Section						
M1 Input Voltage Range	Vi(m1)		0		2	V
M2 Input Voltage Range	Vi(m2)		Vref		Vref+1	V
Input Bias Current	Ibias		-2	-0.5	2	μA
Multiplier Gain	Gv	Vi(m1)=0.5V, Vi(m2)=3V		0.8		/V
Multiplier Gain Stability	STt			-0.2		%/ °C
Current Sense Section						
Input Voltage Threshold	Vth		1.0	1.3	1.6	V
Hysteresis	Vths			200		mV
Input Low Clamp Voltage	Vic(L)	Idet=0mA			0.95	V
Input High Clamp Voltage	Vic(H)	Idet=3mA	6.1	7.1		V
Input Current	Ii	0.8V<Vdet<6V		5		μA
Input Clamp Diode Current	Icd	Vdet<0.9V, Vdet>6V			3	mA
Current Detect Section						
Output Voltage(High)	Vo(H)	Io=-10mA, Vcc=12V	7	9		V
Output Voltage(low)	Vo(L)	Io=10mA, Vcc=12V		0.8	1.8	V
Rising Time	tr	CL=1000pF		100	200	ns
Falling Time	tf	CL=1000pF		90	200	ns
Self-Start Section						
Self Starting Time	tss		12			μs


NOTE:

- 1.Reference can not be tested on the PKG
2. $G_v = V_o(m) / (V_i(m1) * (V_i(m2) - V_{ref}))$

KA7524

LINEAR INTEGRATED CIRCUIT

APPLICATION CIRCUIT

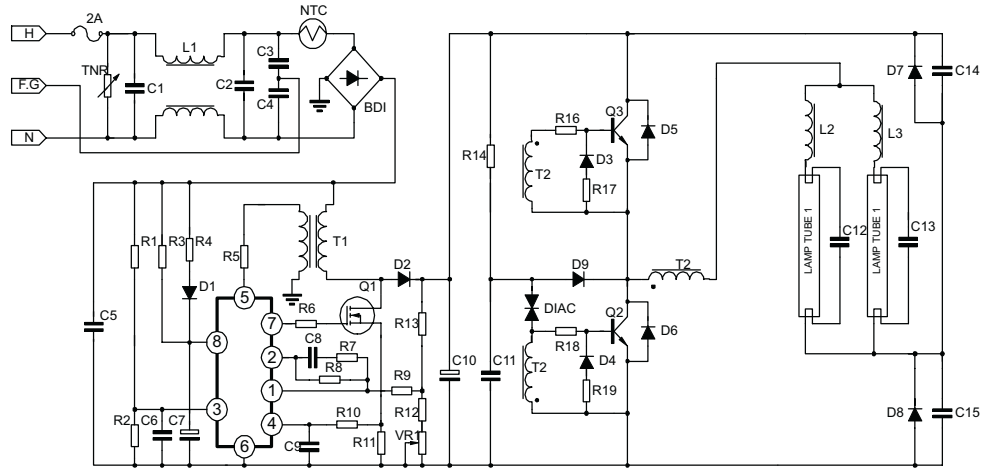

PART LIST

Resistor		R16	5.1	Ω	C10	47	μF/450V	D6	FR107
R1	1.8M	R17	27	Ω	C11	0.1	μF	D7	FR107
R2	10K	R18	5.1	Ω	C12	3300pF		D8	FR107
R3	100K	R19	27	Ω	C13	3300pF		BD1	PBP204
R4	3.3	VR1	5K		C14	0.01	μF	TNR	12G471
R5	22K	NTC	10	Ω	C15	0.01	μF	DIAIC	32V
		Capacitor			Semiconductor			Magnetics	
R7	2.2K	C1	0.1	μF	IC1	Contek KA7524		T1	E1-25(PC30):P=70T
R8	2.2M	C2	0.1	μF	Q1	IRF830			S=4T,Gap=0.5mm
R9	150K	C3	4700pF		Q2	2SC5039		T2	D15(GP-5):
R10	330	C4	4700pF		Q3	2SC5039			P=3T,S=13T
R11	0.75	C5	0.1	μF	D1	1N4004		L1	EE-25(Iron Power)
R12	5.1K	C6	0.01	μF	D2	1N4937			80mH
R13	1M	C7	100	μF	D3	1N4148		L2	EI-25(PC30):
R14	390K	C8	0.1	μF	D4	1N4148			150T,Gap=0.4mm
R15	3.9M	C9	3300pF		D5	FR107			



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com