

KSM-91□LJ1E

The KSM-91□LJ1E consist of a PIN Photodiode of high speed and a preamplifier IC in the package as an receiver for Infrared remote control systems


Features

- Wide angle design
- Wide supply-voltage range : 2.7V to 5.5V
- Shielded against electrical field disturbance
- High immunity against ambient light disturbances (Logic Controller Adaptation)
- Available for carrier frequencies between 32.7KHz to 56.9KHz
- TTL and CMOS compatible

Applications

- Audio & Video Applications (TV, VTR, Audio, DVDP, CDP)
- Home Appliances (Air conditioner, Computer, Camcorder)
- Wireless Toys
- Remote Control Equipment

DIMENSIONS

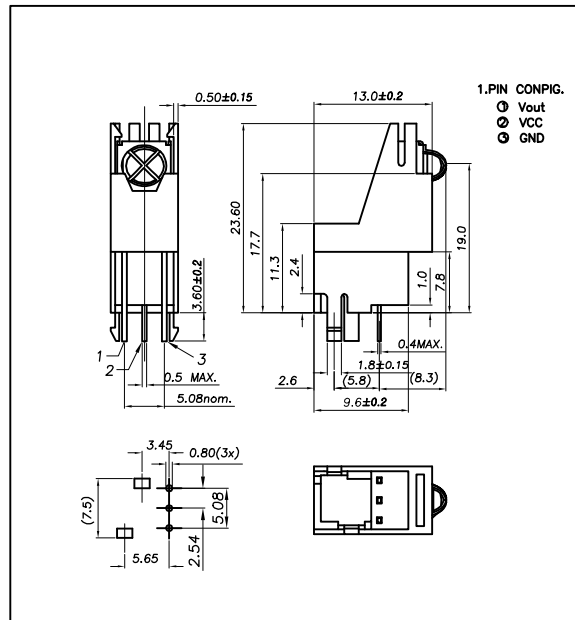

Maximum Ratings

[Ta=25]

Parameter	Symbol	Ratings	Unit
Supply Voltage	Vcc	6.0	V
Operating Temperature	Topr	-10 ~ +60	
Storage Temperature	Tstg	-20 ~ +75	
Soldering Temperature	Tsol	260 (Max 5 sec)	

B.P.F Center Frequency

Model No.	B.P.F Center Frequency(kHz)
KSM-911LJ1E	40.0
KSM-912LJ1E	36.7
KSM-913LJ1E	37.9
KSM-914LJ1E	32.7
KSM-915LJ1E	56.9

Electro-Optical Characteristics

[Ta=25 , Vcc=5.0V(Vcc=3.0V)]

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
Recommended Supply Voltage	Vcc			2.7	-	5.5	V
Current Consumption	Icc	No signal input		0.5	1.2(1.0)	1.7	mA
Peak Wavelength *1	λ p			-	940	-	nm
B.P.F Center Frequency	fo			-	37.9	-	kHz
Transmission Distance *1	L	250 ± 50lx	0 °	15	-	-	m
			± 30 °	12	-	-	
High level Output voltage *1	V _{OH}	30cm over the ray axis		4.5(2.8)	5.0(3.0)	-	V
Low level Output voltage *1	V _{OL}			-	0.1	0.5	V
High level Output Pulse Width *1	T _{WH}	Burst wave=600μs Period = 1.2ms		500	600	700	μs
Low level Output Pulse Width *1	T _{WL}			500	600	700	μs
Output Form	Active Low Output						

*1. It specifies the maximum distance between emitter and detector that the output wave form satisfies the standard under the conditions below against the standard transmitter.


1) Measuring place : Indoor without extreme reflection of light

2) Ambient light source : Detecting surface illumination shall be irradiate 200 ± 50lx under ordinary white fluorescence lamp without high frequency lightning


3) Standard transmitter : Burst wave of standard transmitter shall be arranged to 50mVP-P under the measuring circuit

KSM-91 LJ1E


Measuring Method [Ta=25°C]

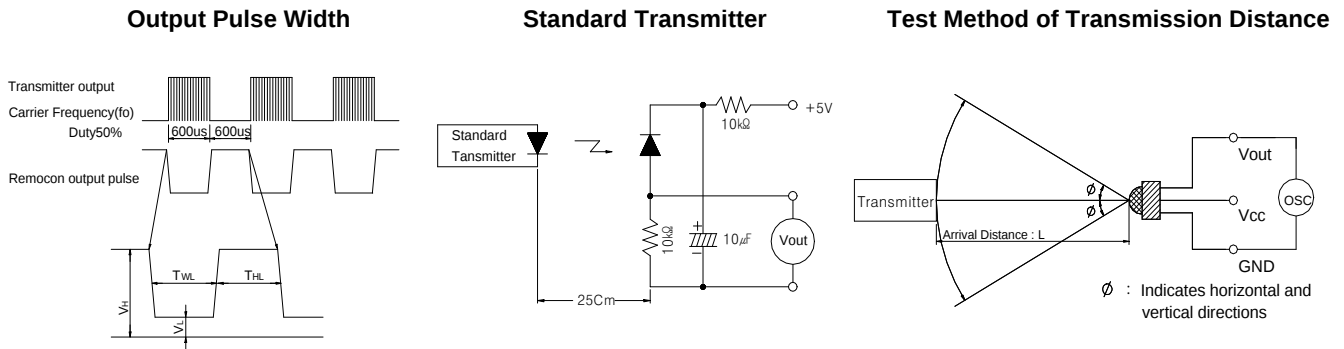

Typical Characteristics Curve [Ta=25°C]

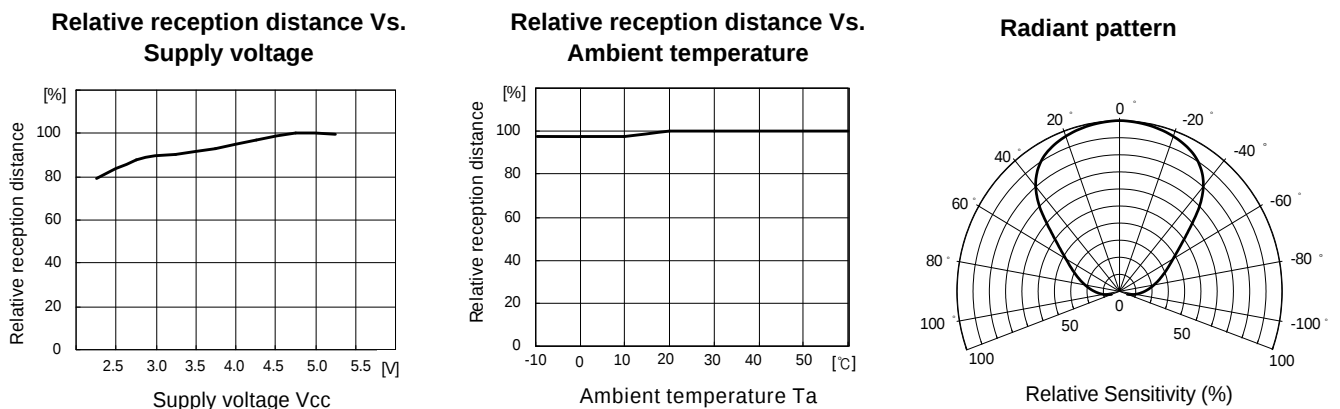

Standard Application Circuit with R-C Decoupling Filter

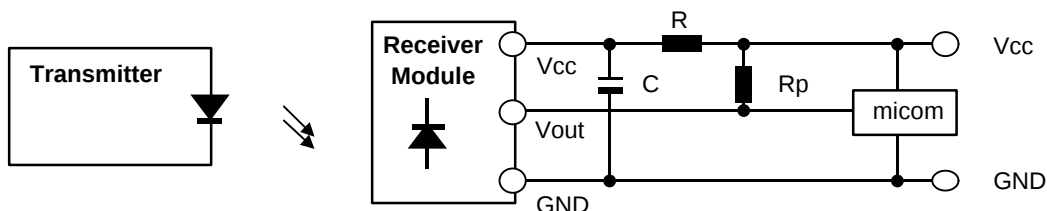

*1 Recommended Circuit Description

- 1) Transmitter(IRED) drive current
: IFP = 300mA_{p-p} ~ 600mA_{p-p}
- 2) R-C Decoupling Filter with Lower Cut-off Frequency
: R=100Ω , C=47μF ⇒ $f_c = 1/2 \pi RC = 33.9\text{Hz}$
- 3) External pull-up resistor(optional)
: 10kΩ over