



深圳市拓普微科技开发有限公司
SHENZHEN TOPWAY TECHNOLOGY CO., LTD.

LM12896DFW

LCD Module User Manual

Prepared by: Lin Date: 2011-3-31	Checked by: Date:	Approved by: Date:
---	----------------------------------	-----------------------------------

Rev.	Descriptions	Release Date
0.1	Prelimiay release	2011-3-31

Table of Content

1. Basic Specifications	3
1.1 Display Specifications	3
1.2 Mechanical Specifications	3
1.3 Block Diagram	3
1.4 Terminal Functions	4
2. Absolute Maximum Ratings	5
3. Electrical Characteristics	5
3.1 DC Characteristics	5
3.2 AC Characteristics	6
3.3 Reset Input	6
4. Function Specifications	7
4.1 Resetting the LCD module	7
4.2 Serial Interface	7
4.3 Display Memory Map	8
4.4 Instructions	9
4.5 Initialization Sequence Example	12
5. Design and Handling Precaution	14

1. Basic Specifications

1.1 Display Specifications

- 1) LCD Display Mode : STN, Negative, Transmissive
- 2) Display Color : Display Data = "1" : Light Gray (*1)
: Display Data = "0" : Dark Blue (*2)
- 3) Viewing Angle : 6 H
- 4) Driving Method : 1/112 duty, 1/10bias
- 5) Back Light : White LED backlight

Note:


*1. Color tone may slightly change by Temperature and Driving Condition.

*2. The Color is defined as the inactive / background color

1.2 Mechanical Specifications

- 1) Outline Dimension : 64.0 x 53.0 x 9.8(Exclude Header)
(see attached Outline Drawing for details)

1.3 Block Diagram

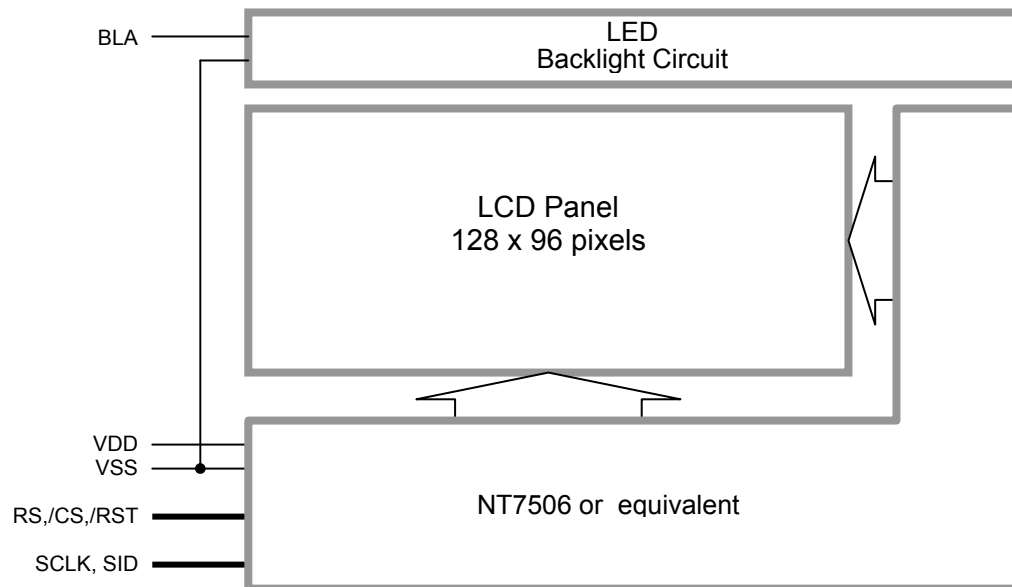

1.4 Terminal Functions

Pin No. K1	Pin Name	I/O	Descriptions 4-pin SPI mode
1	/CS	Input	Chip Select /CS=L, enable access to the LCD module /CS=H, disable access to the LCD module
2	/RST	Input	Reset signal /RST = L, Initialization is executed /RST = H, Normal running.
3	RS	Input	Register Select RS = H, Transferring the Display RAM data RS = L, Transferring the Instruction data
4	NC	NC	Not Connection
:			
9			
10	SCLK	Input	Serial Clock Input
11	SID	Input	Serial Data Input
12	NC	NC	Not Connection
13			
14	VDD	Power	Positive Power Supply
15	VSS	Power	Negative Power Supply, Ground (0V)
16	BLA	Input	LED backlight Enable BLA=H, turn on LED backlight BLA=L, turn off LED backlight

2. Absolute Maximum Ratings

Items	Symbol	Min.	Max.	Unit	Condition
Supply Voltage	V_{DD}	0	4.0	V	$V_{SS} = 0V$
Operating Temperature	T_{OP}	-20	70	°C	No Condensation
Storage Temperature	T_{ST}	-30	80	°C	No Condensation

Cautions:

Any Stresses exceeding the Absolute Maximum Ratings may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

3. Electrical Characteristics

3.1 DC Characteristics

$V_{SS}=0V$, $V_{DD}=3.3V$, $T_{OP}=25^{\circ}C$


Items	Symbol	MIN.	TYP.	MAX.	Unit	Applicable Pin
Operating Voltage	V_{DD}	3.1	-	3.5	V	VDD
Input High Voltage	V_{IH}	$0.8V_{DD}$	-	V_{DD}	V	/CS, /RST, RS, SCLK, SID
Input Low Voltage	V_{IL}	V_{SS}	-	$0.2V_{DD}$	V	
Operating Current	I_{DD}	-	35	41	mA	VDD (BLA=H)
			0.4	1.0	mA	VDD (BLA=L)

3.2 AC Characteristics

$V_{SS}=0V$, $V_{DD}=3.3V$, $T_{OP}=25^{\circ}C$

Item	Symbol	MIN.	TYP.	MAX.	Unit
Serial Clock Cycle	tcys	158	-	-	ns
SCLK Pulse Width High	twhs	85	-	-	ns
SCLK Pulse Width Low	twls	85	-	-	ns
Address Setup Time	tass	85	-	-	ns
Address Hold Time	tahs	85	-	-	ns
Data Setup Time	tdss	85	-	-	ns
Data Hold Time	tdhs	85	-	-	ns
/CS Setup Time	tcss	85	-	-	ns
/CS Hold Time	tchs	0.6tcys	-	-	ns

note: signal rise time and fall time should less than 12ns

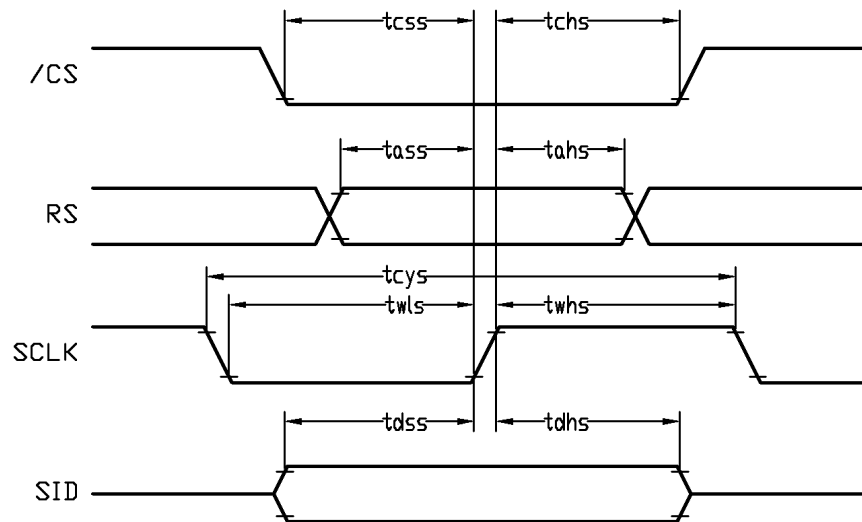


Serial Interface Timing Diagram

3.3 Reset Input

$V_{SS}=0V$, $V_{DD}=3.3V$, $T_{OP}=25^{\circ}C$

Item	Symbol	MIN.	TYP.	MAX.	Unit
Reset Low Pulse Width	trw	1400	-	-	ns
Reset Time	tr	-	-	1400	ns

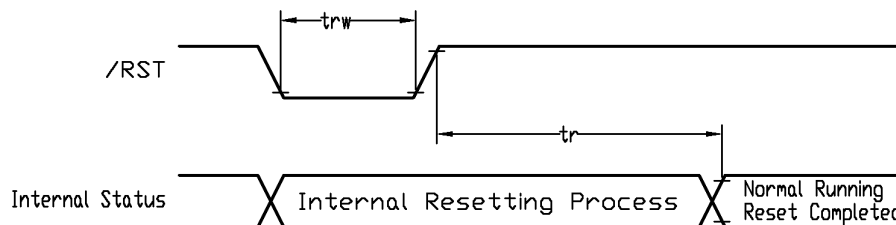

Reset Timing Diagram

4. Function Specifications

4.1 Resetting the LCD module

The LCD module should be initialized by setting /RST terminal at low level after the power supply stable.


4.2 Serial Interface

In serial mode, only write operation is available.

4.2.1 4-pin SPI Mode

In this mode, host transferring the command and display data by 4 wires only.

/CS, Enable the data transaction and init/reset the serial shift register and counter
RS, Address the transferred data as command or display data
SID, Serial data stream, D7 first, D0 last
SCLK, Serial clock, rising edge trigger

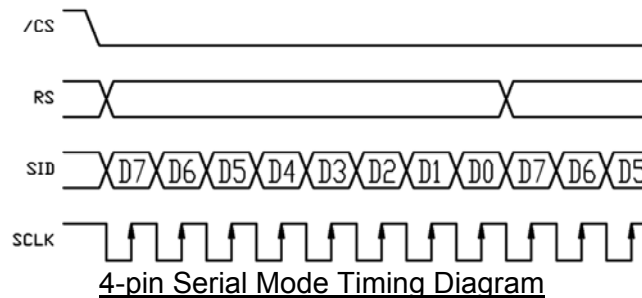

4.3 Display Memory Map

Page Address	Data	LCD Module Top View							
0	D0 : D7								
1	D0 : D7								
:	:								
5	D0 : D7								
6									
:									
7									
8	D0 : D7								
:	:								
12	D0 : D7								
13	D0 : D7								
Column Address	Y7 : Y1	00h	01h	02h	...	7Dh	7Eh	7Fh	
	Y0	0	1	0	1	0	1	0	1
Internal Display RAM Address									

Note: Display start line = 0, COM0 Register=10H, Duty Ratio = 1/112, ADC=0, SHL=1

Only the upper 7bit (Y7:Y1) could be accessed by Column Address instruction, and the instruction will set the Y0 to "0".

The 4-Gray Level are controlled by the combination of two bits in two adjacent byte of Internal Display RAM Address (same Column Address). Please see the following diagram for example.

Internal Display RAM Address								
hex	Y7	Y6	Y5	Y4	Y3	Y2	Y1	Y0
00	0	0	0	0	0	0	0	0
:	:	:	:	:	:	:	:	:
2n	:	:	:	:	:	:	:	0
2n + 1	:	:	:	:	:	:	:	1
:	:	:	:	:	:	:	:	:
FF	1	1	1	1	1	1	1	1

Data bit Value			
0	0	1	1
0	1	0	1

0%	30%	60%	100%
Column Dot Gray Level			

00	0	0	0	0	0	0	0
:	:	:	:	:	:	:	:
n	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:
7F	1	1	1	1	1	1	1
hex	Y7	Y6	Y5	Y4	Y3	Y2	Y1

Column Address

Since the internal display RAM address counter is increased by 1, at each read or write data instruction. The microprocessor could access the display data continuously.

Note, the Column address counter is independent of page address register.

4.4 Instructions

Instructions	Code										Descriptions
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	
read Display Data	1	1	Display RAM Data								Read data form DDRAM
write Display Data	1	0	Display RAM Data								write data into DDRAM
read Status	0	1	BUSY	ON/OFF	RES	MF2	MF1	MF0	DS1	DS0	read the internal status BUSY=1, chip busy; BUSY=0, ready; ON/OFF=1, display on; ON/OFF=0, display off RES=1, resetting; RES=0, reset finished MF[2...0]=manufacture ID DS[1...0]=display size
ICON Control Register	0	0	1	0	1	0	0	0	1	ICON	ICON=0, ICON disabled (default) ICON=1, ICON enabled
set Page Address	0	0	1	0	1	1	P3	P2	P1	P0	set Page Address Register
set Column Address MSB	0	0	0	0	0	1	0	Y7	Y6	Y5	set Column Address high 3bit
set Column Address LSB	0	0	0	0	0	0	Y4	Y3	Y2	Y1	set Column Address low 4bit
set modify-read	0	0	1	1	1	0	0	0	0	0	set modify-read mode
reset modify-read	0	0	1	1	1	0	1	1	1	0	release modify-read mode
Display ON/OFF	0	0	1	0	1	0	1	1	1	DON	DON=0, display OFF DON=1, display ON
set Initial display line register	0	0	0	1	0	0	0	0	x	x	specify the initial display line (2byte instruction)
	0	0	x	S6	S5	S4	S3	S2	S1	S0	
set initial COM0 register	0	0	0	1	0	0	0	1	x	x	specify the initial COM0 (2byte instruction)
	0	0	x	C6	C5	C4	C3	C2	C1	C0	
set partial display duty ratio	0	0	0	1	0	0	1	0	x	x	set partial display duty ratio (2byte instruction)
	0	0	D7	D6	D5	D4	D3	D2	D1	D0	
set N-line Inversion	0	0	0	1	0	0	1	1	x	x	set N-line inversion register (2byte instruction)
	0	0	x	x	x	N4	N3	N2	N1	N0	
Release N-line inversion	0	0	1	1	1	0	0	1	0	0	release N-line inversion
Reverse display ON/OFF	0	0	1	0	1	0	0	1	1	REV	REV=0, normal display REV=1, reverse display
Entire display ON/OFF	0	0	1	0	1	0	0	1	0	EON	EON=0, normal display EON=1, entire display ON

Note:

*1. For the details of the Display Control Instructions, please refer to NT7506 handbook.

Instruction (cont')

Instructions	Code										Function Discription
	RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	
Power Control	0	0	0	0	1	0	1	VC	VR	VF	Power circuit control VC=1, Booster on VC=0, Booster off VR=1, regulator circuit on VR=0, reulartor circuit off VF=1, voltage follower cuircit on VF=0, voltage follower cuircit off
select DC-DC step-up	0	0	0	1	1	0	0	1	DC1	DC0	Select the step-up of the internal voltage converter DC1 DC0 0 0 3 times boosting 0 0 4 times boosting 1 0 5 times boosting 1 1 6 times boosting
select regulator resistor	0	0	0	0	1	0	0	R2	R1	R0	Select internal resistance ratio of the regulator resistor R2 R1 R0 1+(Rb/Ra) 0 0 0 2.3 0 0 1 3.0 0 1 0 3.7 0 1 1 4.4 1 0 0 5.1 1 0 1 5.8 1 1 0 6.5 1 1 1 7.2
set Electronic Volume Register	0	0	1	0	0	0	0	0	0	1	Specify the Reference Voltage (2-byte instruction)
	0	0	x	x	EV5	EV4	EV3	EV2	EV1	EV0	
select LCD bias	0	0	0	1	0	1	0	B2	B1	B0	Select LCD bias B2 B1 B0 LCD bias 0 0 0 1/5 0 0 1 1/6 0 1 0 1/7 0 1 1 1/8 1 0 0 1/9 1 0 1 1/10 1 1 0 1/11 1 1 1 1/12
SHL select	0	0	1	1	0	0	SHL	x	x	x	SHL=0, normal direction (COM0 → COM127) SHL=1, reverse direction (COM127 → COM0)
ADC select	0	0	1	0	1	0	0	0	0	ADC	ADC=0, normal direction (SEG0 → SEG127) ADC=1, reverse direction (SEG127 → SEG0)
Oscillator on start	0	0	1	0	1	0	1	0	1	1	Start the internal oscillator
set Power Save Mode	0	0	1	0	1	0	1	0	0	P	P=0, normal running P=1, sleep mode
release Power Save Mode	0	0	1	1	1	0	0	0	0	1	Release power save mode
reset	0	0	1	1	1	0	0	0	1	0	software reset function
set Data Direction & Display Data Length (DDL)	x	x	1	1	1	0	1	0	0	0	specify the number of data bytes (3-pin SPI only) (2-byte instruction)
	x	x	D7	D6	D5	D4	D3	D2	D1	D0	
NOP	0	0	1	1	1	0	0	0	1	1	no operation
Test Instruction	0	0	1	1	1	1	x	x	x	x	test mode, never use

Note:

*1. For the details of the Display Control Instructions, please refer to NT7506 handbook.

Instruction (cont')

Instructions	Code										Function Descriptions
	RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	
set FRC and PWM mode	0	0	1	0	0	1	0	FRC	PWM1	PWM0	FRC=1, 3FRC FRC=0, 4FRC PWM1 PWM0 0 0 9PWM 0 1 9PWM 1 0 12PWM 1 1 15PWM
set white mode 1 st /2 nd frame pulse width	0	0	1	0	0	0	1	0	0	0	set white mode and 1 st /2 nd frame (2-byte instruction)
	0	0	WB3	WB2	WB1	WB0	WA3	WA2	WA1	WA0	
set white mode 3 rd /4 th frame pulse width	0	0	1	0	0	0	1	0	0	1	set white mode and 3 rd /4 th frame (2-byte instruction)
	0	0	WD3	WD2	WD1	WD0	WC3	WC2	WC1	WC0	
set light gray mode 1 st /2 nd frame pulse width	0	0	1	0	0	0	1	0	1	0	set light gray mode and 1 st /2 nd frame (2-byte instruction)
	0	0	LB3	LB2	LB1	LB0	LA3	LA2	LA1	LA0	
set light gray mode 3 rd /4 th frame pulse width	0	0	1	0	0	0	1	0	1	1	set light gray mode and 3 rd /4 th frame (2-byte instruction)
	0	0	LD3	LD2	LD1	LD0	LC3	LC2	LC1	LC0	
set dark gray mode 1 st /2 nd frame pulse width	0	0	1	0	0	0	1	1	0	0	set dark gray mode and 1 st /2 nd frame (2-byte instruction)
	0	0	DB3	DB2	DB1	DB0	DA3	DA2	DA1	DA0	
set dark gray mode 3 rd /4 th frame pulse width	0	0	1	0	0	0	1	1	0	1	set dark gray mode and 3 rd /4 th frame (2-byte instruction)
	0	0	DD3	DD2	DD1	DD0	DC3	DC2	DC1	DC0	
set black mode 1 st /2 nd frame pulse width	0	0	1	0	0	0	1	1	1	0	set black mode and 1 st /2 nd frame (2-byte instruction)
	0	0	BB3	BB2	BB1	BB0	BA3	BA2	BA1	BA0	
set black mode 3 rd /4 th frame pulse width	0	0	1	0	0	0	1	1	1	1	set black mode and 3 rd /4 th frame (2-byte instruction)
	0	0	BD3	BD2	BD1	BD0	BC3	BC2	BC1	BC0	


Note:

*1. For the details of the Display Control Instructions, please refer to NT7506 handbook.

4.5 Initialization Sequence Example

	Code Function										Note
	RS	D7	D6	D5	D4	D3	D2	D1	D0	hex	
Turn on Power Supply VDD & VSS While maintaining /RES at LOW	-	-	-	-	-	-	-	-	-	-	-
↓	-	-	-	-	-	-	-	-	-	-	-
Wait until power supply is stabilized	-	-	-	-	-	-	-	-	-	-	-
↓	-	-	-	-	-	-	-	-	-	-	See AC Characteristics section for timing details
Release the /RES Reset Signal (/RES = HIGH)	-	-	-	-	-	-	-	-	-	-	-
↓	-	-	-	-	-	-	-	-	-	-	Wait until internal Reset finished
Short Delay	-	-	-	-	-	-	-	-	-	-	-
↓	0	0	1	0	0	1	0	0	0	48h	meet LCD panel characteristic (2-byte inst.)
Display Duty = 1/96	0	0	1	1	0	0	0	0	0	60h	
↓	0	1	0	1	0	0	0	0	1	A1h	Flip x-direction (SEG)
↓	0	1	1	0	0	1	0	0	0	C8h	Flip y-direction (COM)
↓	0	0	1	0	0	0	1	0	0	44h	meet LCD panel characteristic (2-byte inst.)
COM0 Register = 16	0	0	0	0	1	0	0	0	0	10h	
↓	0	0	1	0	0	0	0	0	0	40h	meet LCD panel characteristic (2-byte inst.)
Initial display line = 0	0	0	0	0	0	0	0	0	0	00h	
↓	0	1	0	1	0	1	0	1	1	ABh	start the internal oscillator
Oscillator on Start	0	0	1	1	0	0	1	1	0	66h	5 time boosting
↓	0	0	1	1	0	0	1	1	0	66h	5 time boosting
DC-DC step-up register = 5	0	0	0	1	0	0	1	1	1	27h	set to max.
↓	0	0	0	1	0	0	1	1	1	27h	set to max.
Regulator Resistor = 7	0	1	0	0	0	0	0	0	1	81h	set to middle (2-byte inst.)
↓	0	0	0	1	0	0	0	0	0	20h	
Electronic Volume Register = 32	0	0	1	0	1	0	1	0	0	54h	LCD panel characteristic
↓	0	1	0	0	1	0	0	1	1	93h	Gray scale driving method
LCD Bias = 1/9	0	1	0	0	0	1	0	0	0	88h	PWM=0 in 1 st and 2 nd frame (2-byte inst.)
↓	0	0	0	0	0	0	0	0	0	00h	
1 st & 2 nd frame's PWM level of "White" level	0	1	0	0	0	1	0	0	1	89h	PWM=0 in 3 rd and 4 th frame (2-byte inst.)
↓	0	0	0	0	0	0	0	0	0	00h	
3 rd & 4 th frame's PWM level of "White"	0	1	0	0	0	1	0	1	0	8Ah	PWM=8 in 1 st and 2 nd frame (2-byte inst.)
↓	0	1	0	0	0	1	0	0	0	88h	
1 st & 2 nd frame's PWM level of "Light Gray"	0	1	0	0	0	1	0	1	1	8Bh	PWM=8 in 3 rd and 4 th frame (2-byte inst.)
↓	0	1	0	0	0	1	0	0	0	88h	
3 rd & 4 th frame's PWM level of "Light Gray"											

Initialization Sequence Example (cont')

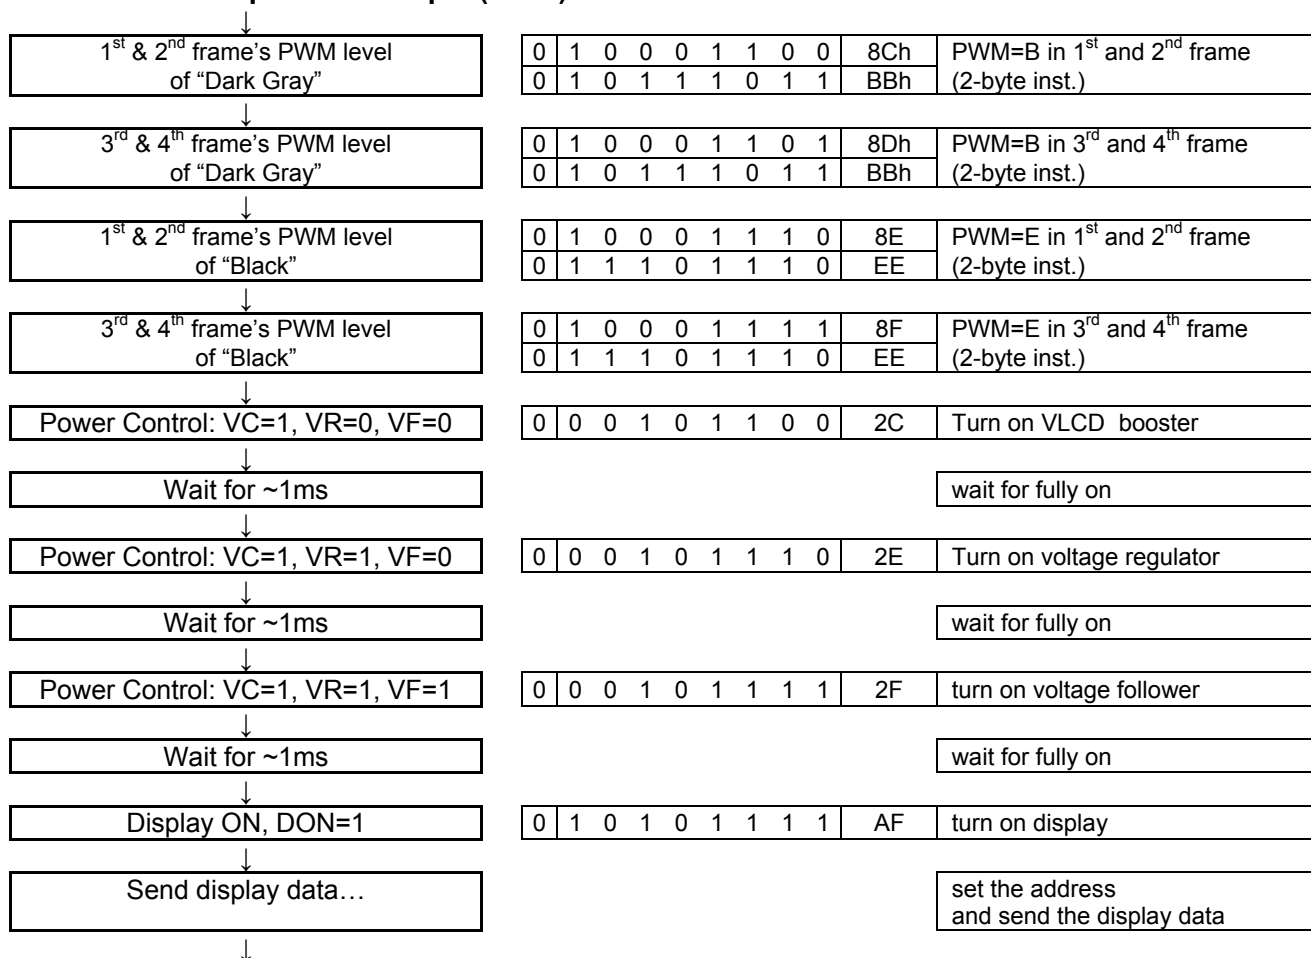

4.5.1 Power off the LCD Module

It recommends that LCD module should enter sleep mode before power off.

4.5.2 Refreshing The LCD Module

It recommends that the operating modes and display contents should be refreshed periodically to prevent the effect of unexpected noise.

5. Design and Handling Precaution

1. The LCD panel is made by glass. Any mechanical shock (eg. dropping from high place) will damage the LCD module.
2. Do not add excessive force on the surface of the display, which may cause the Display color change abnormally.
3. The polarizer on the LCD is easily get scratched. If possible, do not remove the LCD protective film until the last step of installation.
4. Never attempt to disassemble or rework the LCD module.
5. Only Clean the LCD with Isopropyl Alcohol or Ethyl Alcohol. Other solvents (eg. water) may damage the LCD.
6. When mounting the LCD module, make sure that it is free from twisting, warping and distortion.
7. Ensure to provide enough space (with cushion) between case and LCD panel to prevent external force adding on it, or it may cause damage to the LCD or degrade the display result.
8. Only hold the LCD module by its side. Never hold LCD module by add force on the heat seal or TAB.
9. Never add force to component of the LCD module. It may cause invisible damage or degrade of the reliability.
10. LCD module could be easily damaged by static electricity. Be careful to maintain an optimum anti-static work environment to protect the LCD module.
11. When peeling off the protective film from LCD, static charge may cause abnormal display pattern. It is normal and will resume to normal in a short while.
12. Take care and prevent get hurt by the LCD panel sharp edge.
13. Never operate the LCD module exceed the absolute maximum ratings.
14. Keep the signal line as short as possible to prevent noisy signal applying to LCD module.
15. Never apply signal to the LCD module without power supply.
16. IC chip (eg. TAB or COG) is sensitive to the light. Strong lighting environment could possibly cause malfunction. Light sealing structure casing is recommend.
17. LCD module reliability may be reduced by temperature shock.
18. When storing the LCD module, avoid exposure to the direct sunlight, high humidity, high temperature or low temperature. They may damage or degrade the LCD module