

LP141WX5  
Liquid Crystal Display

## Product Specification

# SPECIFICATION FOR APPROVAL

(◆) Preliminary Specification

( ) Final Specification

Title	14.1" WXGA TFT LCD
-------	--------------------

Customer	
MODEL	

SUPPLIER	LG Display Co., Ltd.
*MODEL	LP141WX5
Suffix	TPP1

\*When you obtain standard approval,  
please use the above model name without suffix

APPROVED BY	SIGNATURE
/	
/	
/	

Please return 1 copy for your confirmation with your signature and comments.

APPROVED BY	SIGNATURE
H.S. Kim / G.Manager	
REVIEWED BY	
Y. S. Ha / Manager	
PREPARED BY	
K.Y. Kwon / Engineer	
C.Y. Jung / Engineer	

Products Engineering Dept.  
LG Display Co., Ltd

LP141WX5  
Liquid Crystal Display

## Product Specification

Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTERISTICS	6
3-2	INTERFACE CONNECTION	7
3-3	eDP SIGNAL TIMING SPECIFICATIONS	8
3-4	SIGNAL TIMING SPECIFICATIONS	10
3-5	SIGNAL TIMING WAVEFORMS	10
3-6	COLOR INPUT DATA REFERENCE	11
3-7	POWER SEQUENCE	12
4	OPTICAL SPECIFICATIONS	13
5	MECHANICAL CHARACTERISTICS	16
A	APPENDIX. LPL PROPOSAL FOR SYSTEM COVER DESIGN	20-22
6	RELIABILITY	23
7	INTERNATIONAL STANDARDS	
7-1	SAFETY	24
7-2	EMC	24
8	PACKING	
8-1	DESIGNATION OF LOT MARK	25
8-2	PACKING FORM	25
9	PRECAUTIONS	26
A	APPENDIX. Enhanced Extended Display Identification Data	28-30



LP141WX5  
Liquid Crystal Display

## Product Specification

## RECORD OF REVISIONS


[illegible]

LP141WX5  
Liquid Crystal Display

## Product Specification

## 1. General Description

The LP141WX5 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 14.1 inches diagonally measured active display area with WXGA resolution (1280 horizontal by 800 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors. The LP141WX5 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP141WX5 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP141WX5 characteristics provide an excellent flat display for office automation products such as Notebook PC.

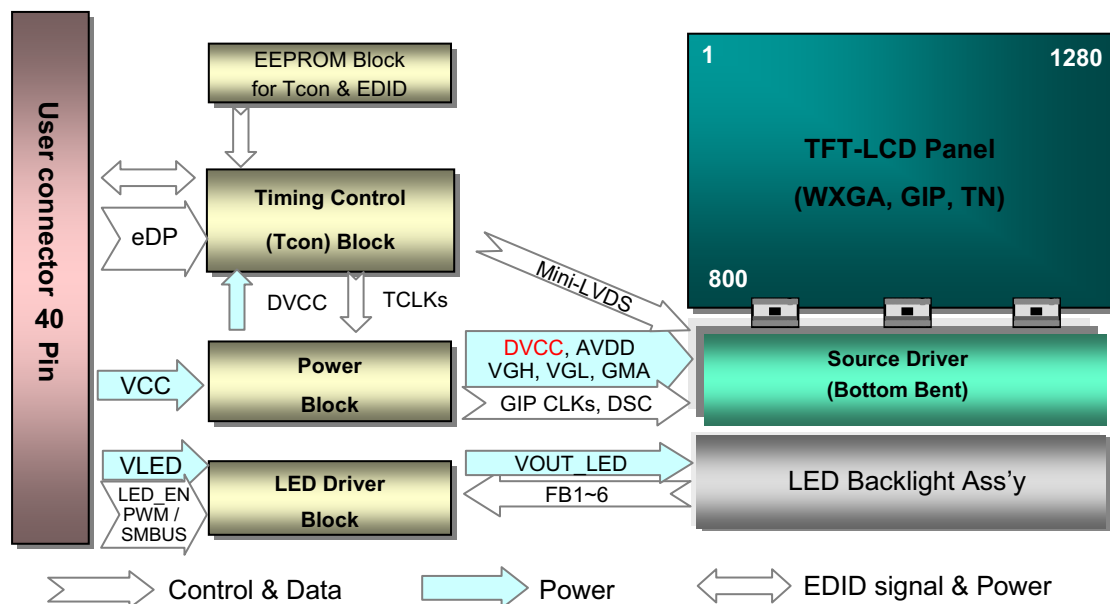

## General Features

Active Screen Size	14.1 inches diagonal
Outline Dimension	319.5(H, Typ.) × 206.5(V, Typ.) × 5.5(D, Max.) mm
Pixel Pitch	0.2373mm X 0.2373 mm
Pixel Format	1280 horiz. by 800 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	220 cd/m <sup>2</sup> (Typ., @ I <sub>LED</sub> = 18 mA)
Power Consumption	Total 4.7 W(Typ.) Logic : 1.5 W (Typ.@ Mosaic), B/L : 3.2 W (Typ.@ 18mA )
Weight	375g (Max.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Anti-Glare treatment (3H) of the front Polarizer
RoHS Compliance	Yes
BFR / PVC / As Free	Yes for all

Ver. 0.0

Mar. 29, 2010

4 / 30



LP141WX5  
Liquid Crystal Display

## Product Specification


### 2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

**Table 1. ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.  
Wet bulb temperature should be 39°C Max, and no condensation of water.

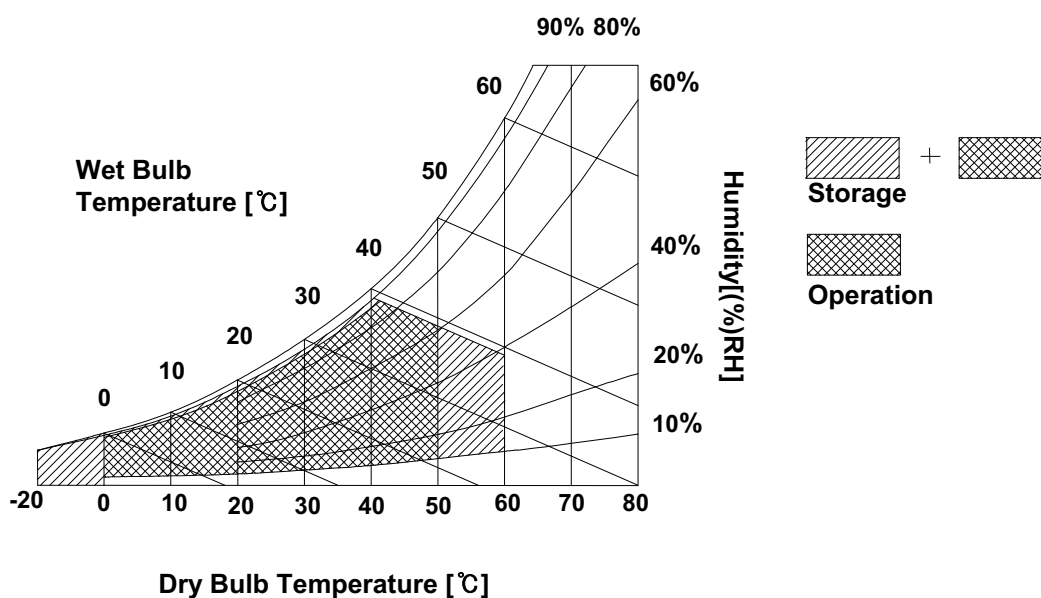



LP141WX5  
Liquid Crystal Display

## Product Specification

### 3. Electrical Specifications

#### 3-1. Electrical Characteristics

The LP141WX5 requires two power inputs. The first logic is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second backlight is the input about LED BL with LED Driver.

**Table 2. ELECTRICAL CHARACTERISTICS**

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
LOGIC :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V	1
Power Supply Input Current	ICC	-	450	520	mA	2
Power Consumption	PCC	-	1.5	1.7	W	2
Power Supply Inrush Current	ICC_P	-	-	2000	mA	3
eDP Impedance	ZeDP	90	100	110	$\Omega$	4
BACKLIGHT : ( with LED Driver)						
LED Power Input Voltage	V <sub>LED</sub>	7.5	12.0	21.0	V	5
LED Power Input Current	I <sub>LED</sub>	-	18	21	mA	6
LED Power Consumption	P <sub>LED</sub>	-	3.2	3.4	W	6
LED Power Inrush Current	I <sub>LED_P</sub>	-	-	2000	mA	7
PWM Duty Ratio		5	-	100	%	8
PWM Jitter	-	0	-	0.2	%	9
PWM Impedance	Z <sub>PWM</sub>	20	40	60	k $\Omega$	
PWM Frequency	F <sub>PWM</sub>	200	-	1000	Hz	10
PWM High Level Voltage	V <sub>PWM_H</sub>	3.0	-	5.3	V	
PWM Low Level Voltage	V <sub>PWM_L</sub>	0	-	0.3	V	
LED_EN Impedance	Z <sub>PWM</sub>	20	40	60	k $\Omega$	
LED_EN High Voltage	V <sub>LED_EN_H</sub>	3.0	-	5.3	V	
LED_EN Low Voltage	V <sub>LED_EN_L</sub>	0	-	0.3	V	
Life Time		15,000	-	-	Hrs	11




LP141WX5  
Liquid Crystal Display


## Product Specification

### Note)


1. The measuring position is the connector of LCM and the test conditions are under 25°C,  $f_v = 60\text{Hz}$ , Black pattern.
2. The specified  $I_{cc}$  current and power consumption are under the  $V_{cc} = 3.3\text{V}$ , 25°C,  $f_v = 60\text{Hz}$  condition and Mosaic pattern.

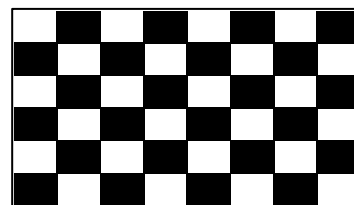

3. This Spec. is the max load condition for the cable impedance designing.
4. The below figures are the measuring  $V_{cc}$  condition and the  $V_{cc}$  control block LGD used.  
The  $V_{cc}$  condition is same as the minimum of T1 at Power on sequence.

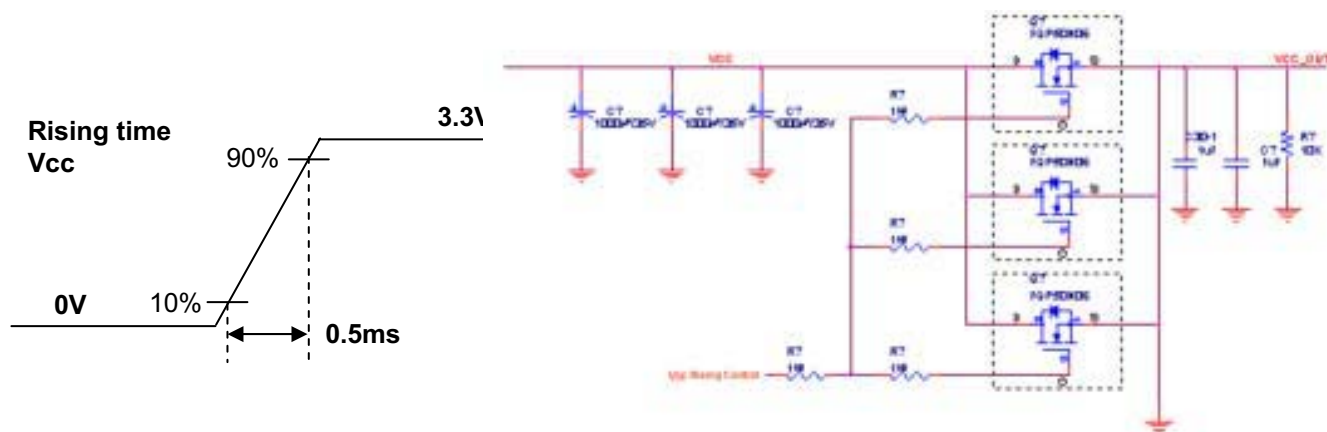

5. This impedance value is needed for proper display and measured from eDP Tx to the mating connector.
6. The measuring position is the connector of LCM and the test conditions are under 25°C.
7. The current and power consumption with LED Driver are under the  $V_{led} = 12.0\text{V}$ , 25°C, Dimming of Max luminance and White pattern with the normal frame frequency operated(60Hz).
8. The below figures are the measuring  $V_{led}$  condition and the  $V_{led}$  control block LGD used.  
 $V_{LED}$  control block is same with  $V_{cc}$  control block.

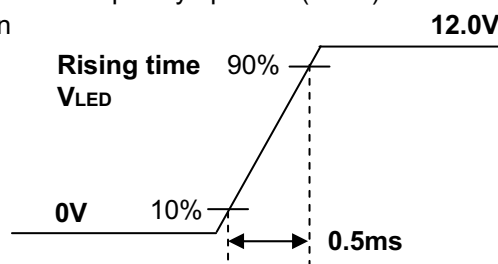

9. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.
10. If Jitter of PWM is bigger than maximum, it may induce flickering.
11. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.
12. The life time is determined as the sum of the continuous operation time at which brightness of LCD at the typical LED current is 50% compare to that of minimum value specified in table 7 under general user condition.




LP141WX5  
Liquid Crystal Display

## Product Specification

### 3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

**Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)**

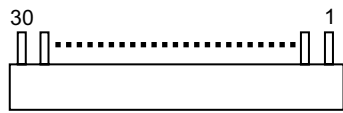Pin	Symbol	Description	Notes
1	PAID	Conn. Continuity Test	<b>[Interface Chip]</b> 1. LCD : IDT, VPP1420 (LCD Controller Including eDP Receiver. 2. System : TBD or equivalent * Pin to Pin compatible with eDP  <b>[Connector]</b> CABLINE-VS RECE ASS'Y, I-PEX or its compatibles  <b>[Mating Connector]</b> CABLINE-VS PLUG CABLE ASS'Y or equivalent.  <b>[Connector pin arrangement]</b>  [LCD Module Rear View]
2	GND	High Speed (Main Link) Ground	
3	Lane1_N	Complement Signal-Lane 1 ( No Connection )	
4	Lane1_p	True Signal-Main Lane 1 ( No Connection )	
5	GND	High Speed (Main Link) Ground	
6	Lane0_N	Complement Signal-Lane 0	
7	Lane0_p	True Signal-Main Lane 0	
8	GND	High Speed (Main Link) Ground	
9	AUX_P	True Signal-Auxiliary Channel	
10	AUX_N	Complement Signal-Auxiliary Channel	
11	GND	High Speed (Main Link) Ground	
12	VCC	LCD Logic and driver power (3.3V Typ.)	
13	VCC	LCD Logic and driver power (3.3V Typ.)	
14	BIST	LCD Panel Self Test Enable	
15	GND	Ground	
16	GND	Ground	
17	HPD	HPD signal pin	
18	GND	LED Backlight Ground	
19	GND	LED Backlight Ground	
20	GND	LED Backlight Ground	
21	GND	LED Backlight Ground	
22	LED_EN (NC)	LED Backlight On/Off	
23	PWM	System PWM Signal input for dimming	
24	SMBUS_CLK	Backlight Control Clk	
25	SMBUS_DATA	Backlight Control Data	
26	VLED	LED Backlight Power (7.5V-21V)	
27	VLED	LED Backlight Power (7.5V-21V)	
28	VLED	LED Backlight Power (7.5V-21V)	
29	VLED	LED Backlight Power (7.5V-21V)	
30	PAID	Conn. Continuity Test	


LP141WX5  
Liquid Crystal Display

## Product Specification

## 3-3. eDP Signal Timing Specifications

## 3-3-1. DC Specification

The VESA Display Port related AC specification is compliant with the VESA Display Port Standard v1.1a.

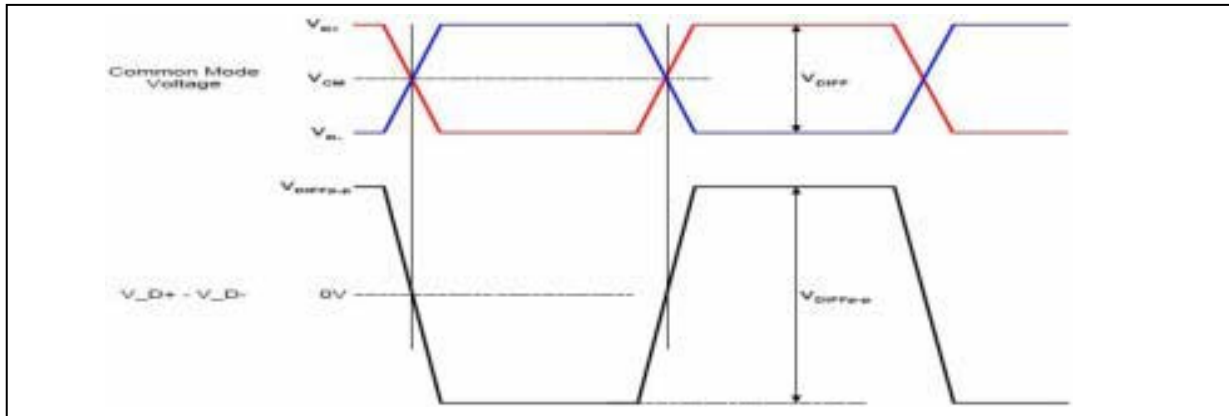

Description	Symbol	Min	Max	Unit	Notes
Differential peak-to-peak Input voltage	VDIFF p-p	120	-	mV	For high bit rate
		40	-		For reduced bit rate
Rx DC common mode voltage	VCM	0	2.0	V	-

## 3-3-2. AC Specification

The VESA Display Port related AC specification is compliant with the VESA Display Port Standard v1.1a.

Description	Symbol	Min	Typ	Max	Unit	Notes
Unit Interval for high bit rate (2.7Gbps/lane)	UI_High_Rate	-	370	-	ps	Range is nominal $\pm 350$ ppm. DisplayPort Link Rx does not require local crystal for link clock generation
Unit Interval for high bit rate (1.62Gbps/lane)	UI_Low_Rate	-	617	-	ps	
Lane-to-Lane skew	V Rx-SKEW-INTER_PAIR	-	-	5200	ps	-
Lane intra-pair skew	V Rx-SKEW-INTRA_PAIR	-	-	100	ps	For high bit rate
		-	-	300	ps	For reduced bit rate



LP141WX5  
Liquid Crystal Display

## Product Specification

### 3-4. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of eDP Tx/Rx for its proper operation.


**Table 4. TIMING TABLE**

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Frequency	$f_{CLK}$	-	74.8	-	MHz	
Hsync	Period	$T_{hp}$	1376	1472	1600	tCLK	
	Width	$t_{WH}$	32	44	56		
	Width-Active	$t_{WHA}$	1280	1280	1280		
Vsync	Period	$t_{VP}$	807	846	885	tHP	
	Width	$t_{WV}$	2	8	16		
	Width-Active	$t_{WVA}$	800	800	800		
Data Enable	Horizontal back porch	$t_{HBP}$	32	94	172	tCLK	
	Horizontal front porch	$t_{HFP}$	32	54	92		
	Vertical back porch	$t_{VBP}$	4	29	54	tHP	
	Vertical front porch	$t_{VFP}$	1	9	18		

### 3-5. Signal Timing Waveforms

Condition : VCC = 3.3V

Data Enable, Hsync, Vsync

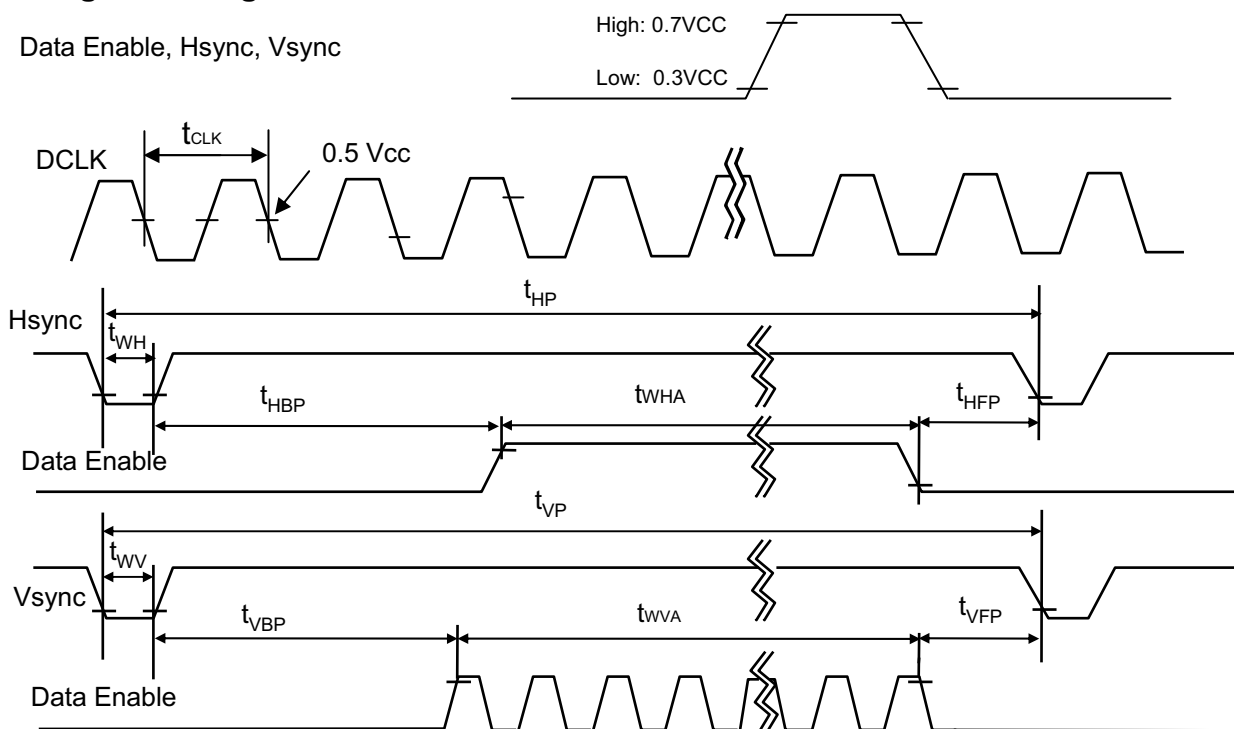

LP141WX5  
Liquid Crystal Display

## Product Specification

## 3-6. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 5. COLOR DATA REFERENCE

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB			LSB			MSB			LSB			MSB			LSB		
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	...	...						...						...					
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...	...						...						...					
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	...	...						...						...					
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1



LP141WX5  
Liquid Crystal Display

## Product Specification

### 3-7. Power Sequence

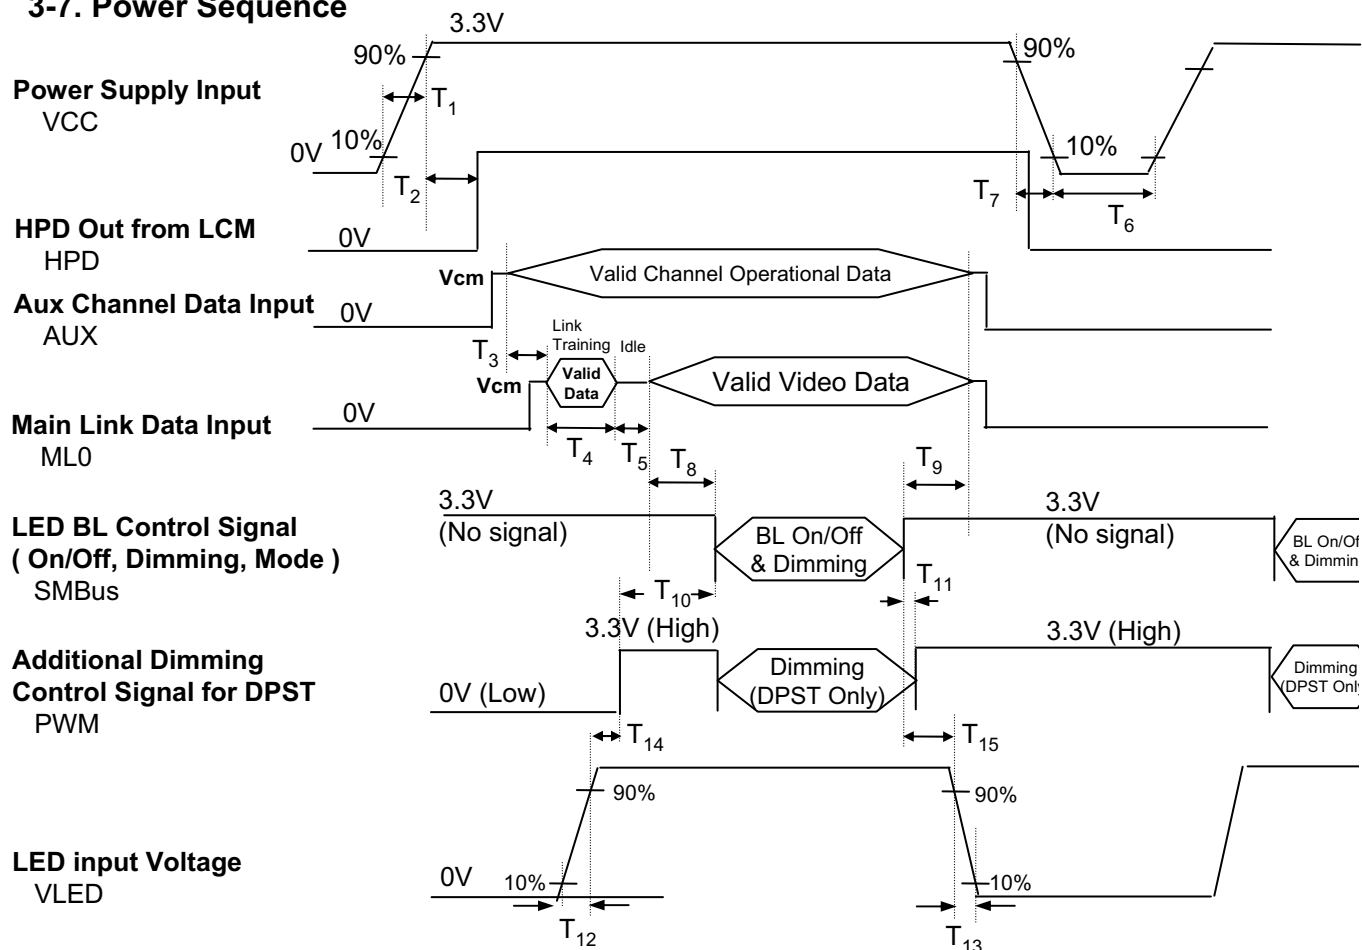


Table 6. POWER SEQUENCE TABLE

Logic Parameter	Value			Units	LED Parameter	Value			Units
	Min.	Typ.	Max.			Min.	Typ.	Max.	
$T_1$	0.5	-	10	ms	$T_9$	200	-	-	ms
$T_2$	0	-	200	ms	$T_{10}$	200	-	-	ms
$T_3$	50	75	-	ms	$T_{11}$	0	-	50	ms
$T_4$	0	-	-	ms	$T_{12}$	0.5	-	-	ms
$T_5$	0	-	-	ms	$T_{13}$	0	-	5000	ms
$T_6$	500	-	-	ms	$T_{14}$	0	-	-	ms
$T_7$	3	-	10	ms	$T_{15}$	50	-	-	ms
$T_8$	200	-	-	ms					

Note)


1. Do not insert the mating cable when system turn on.
2. Valid Data have to meet "3-3. eDP Signal Timing Specifications"
3. LVDS, LED\_EN and PWM need to be on pull-down condition on invalid status.
4. LGD recommend the rising sequence of VLED after the Vcc and valid status of LVDS turn on.

## 4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of  $\Phi$  and  $\Theta$  equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

**FIG. 1 Optical Characteristic Measurement Equipment and Method**

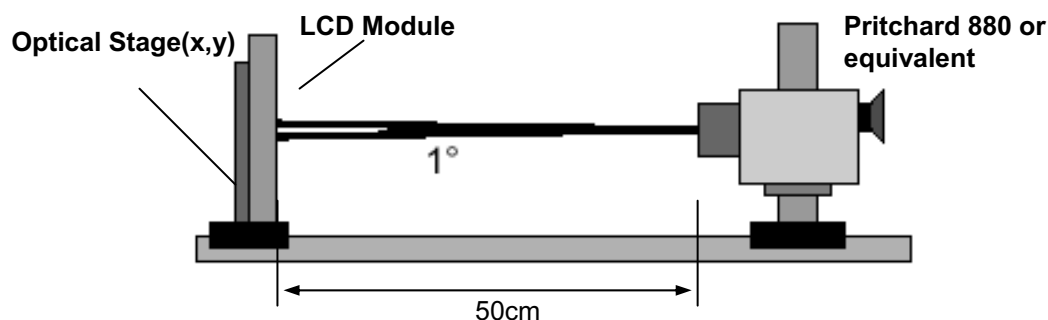

**Table 7. OPTICAL CHARACTERISTICS**

Ta=25°C, VCC=3.3V, fv=60Hz, fCLK= 69.3MHz

Parameter	Symbol	Values			Units	Notes
		Min	Typ	Max		
Contrast Ratio	CR	300	-	-		1
Surface Luminance, white	L <sub>WH</sub>	200	220	-	cd/m <sup>2</sup>	2
Luminance Variation	$\delta_{\text{WHITE}}$	-	1.4	1.6		3
Response Time	Tr <sub>R+</sub> Tr <sub>D</sub>		16		ms	4
Color Coordinates						
RED	RX	0.550	0.580	0.610		
	RY	0.315	0.345	0.375		
GREEN	GX	0.307	0.337	0.367		
	GY	0.526	0.556	0.586		
BLUE	BX	0.129	0.159	0.189		
	BY	0.104	0.134	0.164		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						5
x axis, right( $\Phi=0^\circ$ )	$\Theta_r$	40	45	-	degree	
x axis, left ( $\Phi=180^\circ$ )	$\Theta_l$	40	45	-	degree	
y axis, up ( $\Phi=90^\circ$ )	$\Theta_u$	10	15	-	degree	
y axis, down ( $\Phi=270^\circ$ )	$\Theta_d$	30	35	-	degree	
Gray Scale			2.2			6

LP141WX5  
Liquid Crystal Display

## Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = \text{Average}(L_1, L_2, \dots L_5)$$

3. The variation in surface luminance, The panel total variation ( $\delta_{WHITE}$ ) is determined by measuring  $L_N$  at each test position 1 through 13 and then defined as following numerical formula.  
For more information see FIG 2.

$$\delta_{WHITE} = \frac{\text{Maximum}(L_1, L_2, \dots L_{13})}{\text{Minimum}(L_1, L_2, \dots L_{13})}$$

4. Response time is the time required for the display to transition from white to black (rise time,  $Tr_R$ ) and from black to white(Decay Time,  $Tr_D$ ). For additional information see FIG 3.
5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification

\*  $f_V = 60\text{Hz}$ 

Gray Level	Luminance [%] (Typ)
L0	0.2
L7	1.7
L15	5.8
L23	12.5
L31	21.6
L39	35.8
L47	54.8
L55	77.5
L63	100

## Product Specification

FIG. 2 Luminance

&lt;measuring point for surface luminance &amp; measuring point for luminance variation&gt;

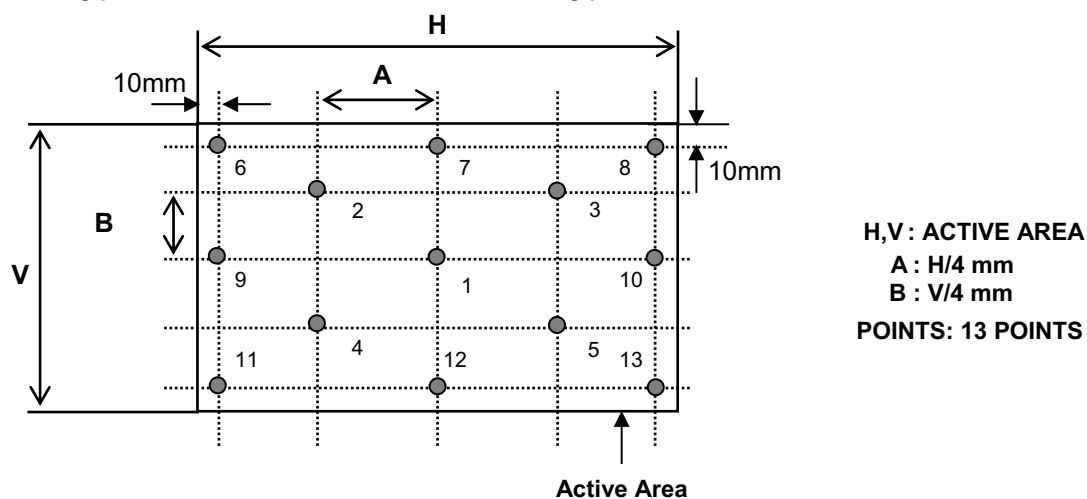


FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".


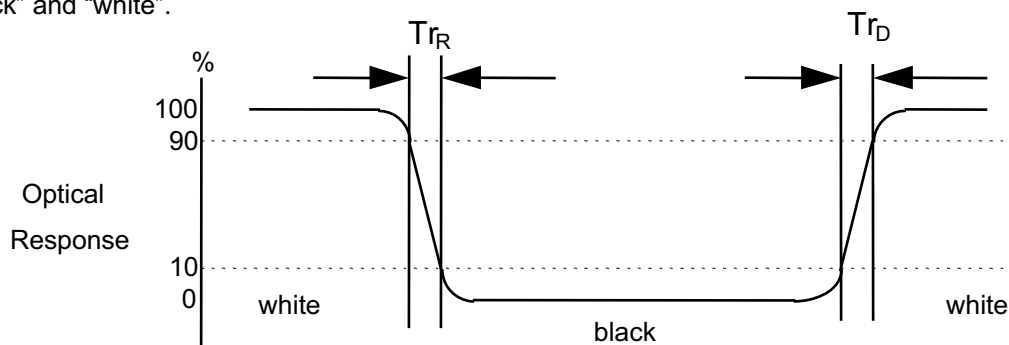


FIG. 4 Viewing angle

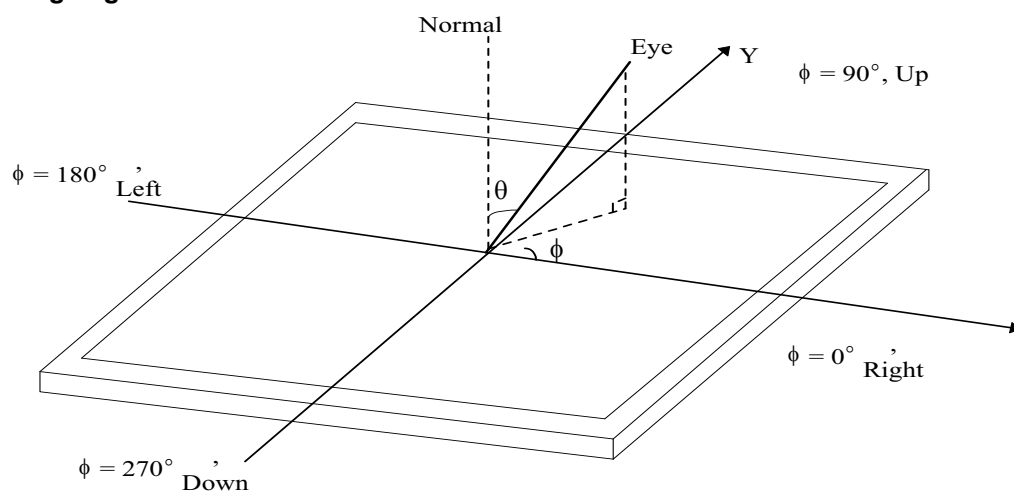

LP141WX5  
Liquid Crystal Display

## Product Specification

## 5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP141WX5. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	319.5 ± 0.5mm
	Vertical	206.5 ± 0.5mm
	Thickness	5.5mm (max.)
Bezel Area	Horizontal	312.5 ± 0.5mm
	Vertical	193.8 ± 0.5mm
Active Display Area	Horizontal	303.74 mm
	Vertical	189.84 mm
Weight	375g (Max.)	
Surface Treatment	Anti-glare treatment of the front polarizer	




LP141WX5  
Liquid Crystal Display

Product Specification

<FRONT VIEW>

Note) Unit:[mm], General tolerance:  $\pm 0.5\text{mm}$

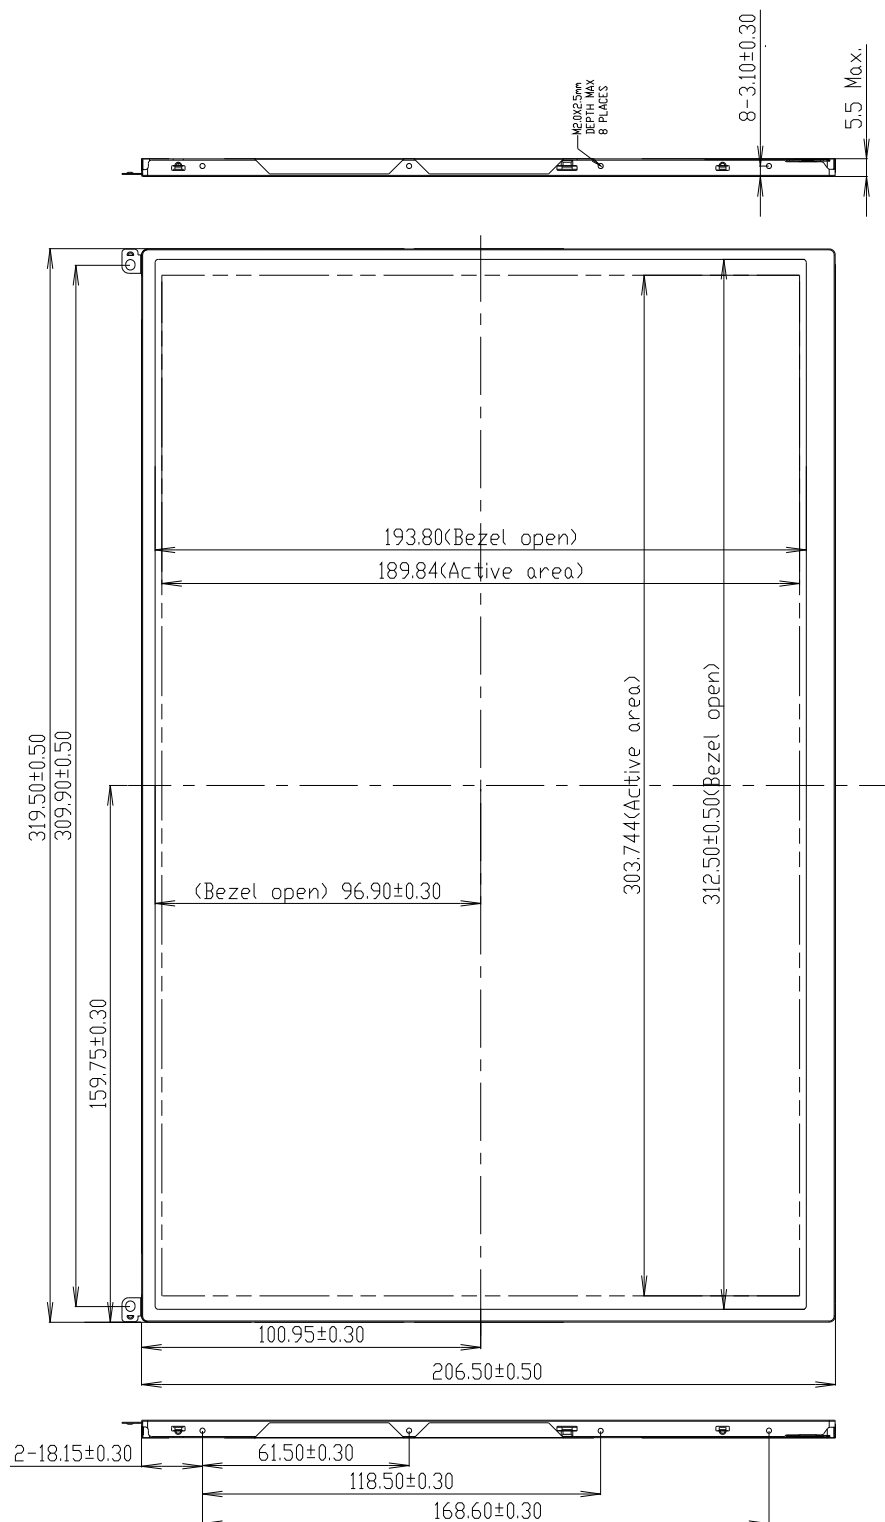






LP141WX5  
Liquid Crystal Display

### Product Specification


#### [ DETAIL DESCRIPTION OF SIDE MOUNTING SCREW ]

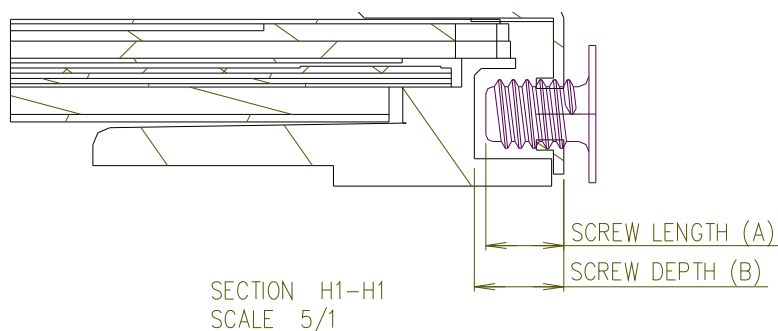

- \* Mounting Screw Length (A)  
= 2.0(Min) / 2.5(Max)
- \* Mounting Screw Hole Depth (B)  
= 2.5(Min)
- \* Mounting hole location : 3.7(typ.)
- \* Torque : 2.5 kgf.cm(Max)  
(Measurement gauge : torque meter)

Notes : 1. Screw plated through the method of non-electrolytic nickel plating is preferred to reduce possibility that results in vertical and/or horizontal line defect due to the conductive particles from screw surface.

#### [ DETAIL INFORMATION OF PPID LABEL AND REVISION CODE ]


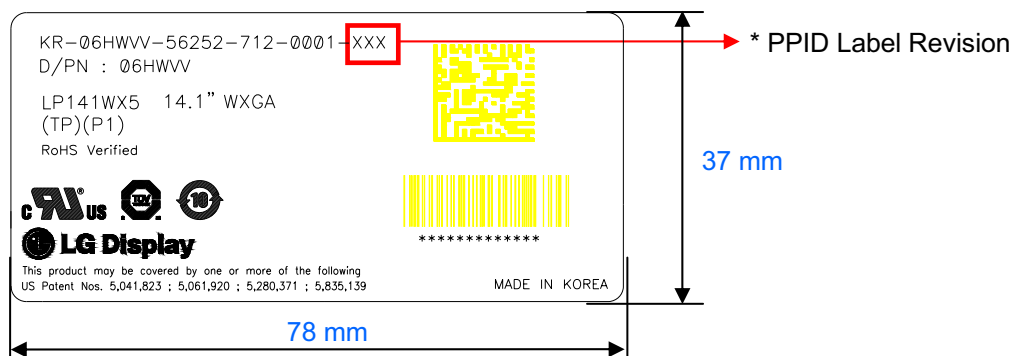


\* PPID Label Revision :

It is subject to change with Dell event. Please refer to the below table for detail.

Classification	No Change	1st Revision	2nd Revision	...	9th Revision	...
SST(WS)	X00	X01	X02	...	A09	...
PT(ES)	X10	X11	X12	...	A19	...
ST(CS)	X20	X21	X22	...	A29	...
XB(MP)	A00	A01	A02	...	A09	...

**LGD Proposal for system cover design.(Appendix)**

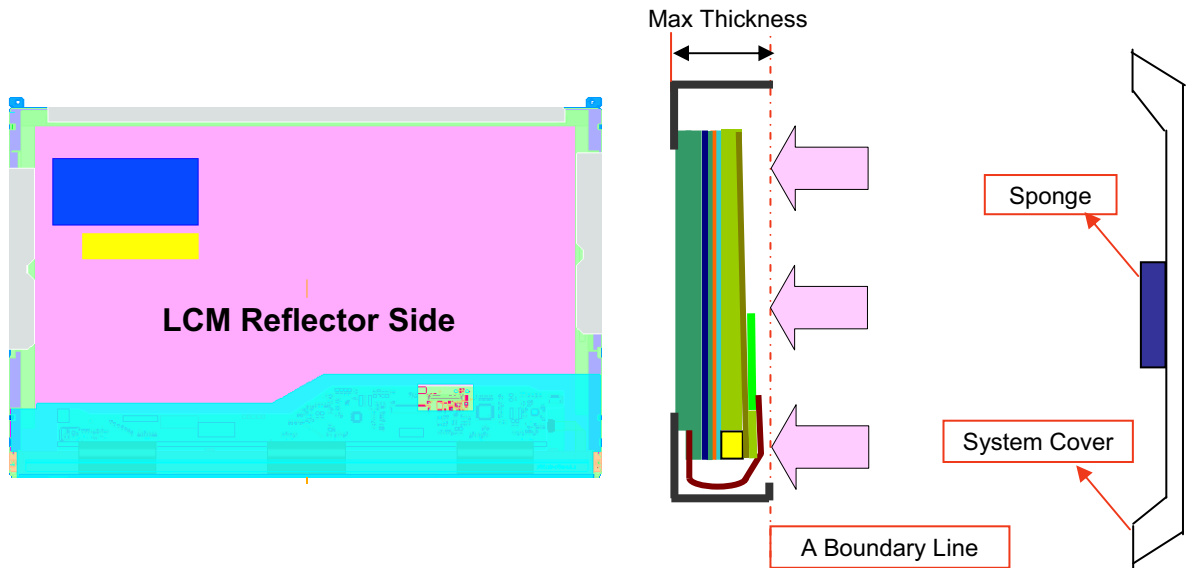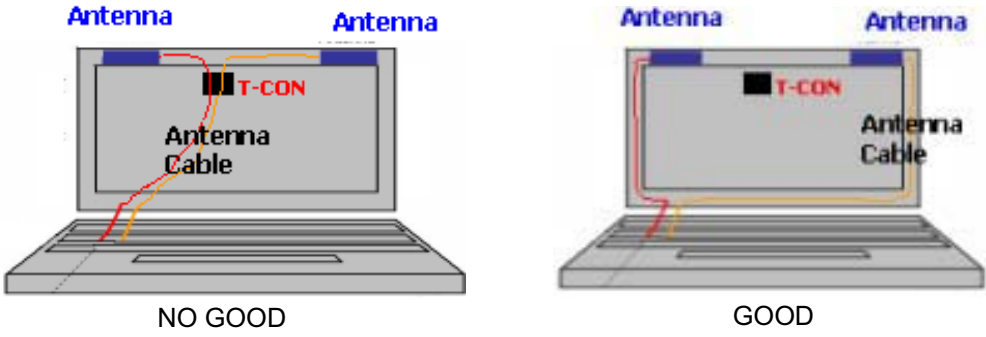1	Gap check for securing the enough gap between LCM and System cover.	
 <p>The diagram illustrates the gap check for securing the LCM and System cover. On the left, a top-down view of the LCM Reflector Side is shown with a pink area and a blue area. To the right, a cross-sectional view shows the LCM (green and yellow layers) with a 'Max Thickness' dimension. A 'Boundary Line' is indicated by a red dashed line. To the right of the boundary line, a 'Sponge' (blue) is shown, and further right is the 'System Cover' (white). Arrows point from the sponge and system cover towards the boundary line.</p>		
Define	<p>1.Rear side of LCM is sensitive against external stress,and previous check about interference is highly needed.</p> <p>2.In case there is something from system cover comes into the boundary above,mechanical interference may cause the FOS defects. (Eg:Ripple,White spot..)</p>	
2	Check if antenna cable is sufficiently apart from T-CON of LCD Module.	
Define	 <p>The diagram shows two scenarios for antenna cable placement relative to the T-CON. On the left, labeled 'NO GOOD', the antenna cable (red) overlaps the T-CON (black). On the right, labeled 'GOOD', the antenna cable (red) is separated from the T-CON (black). Both diagrams show the antenna (blue) and the antenna cable (red) connected to the T-CON.</p>	
	1.If system antenna is overlapped with T-CON,it might be cause the noise.	




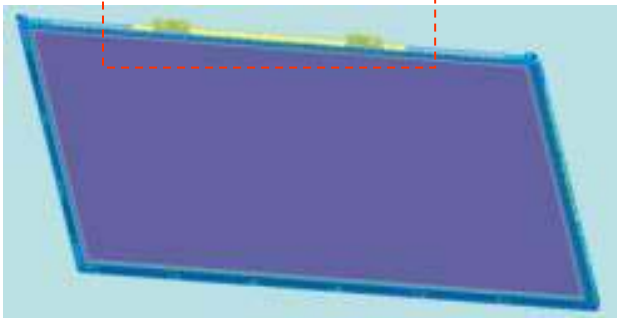
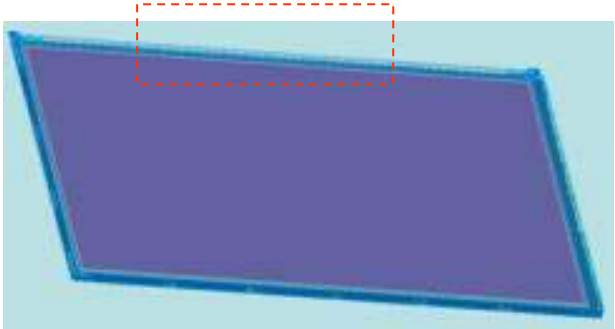
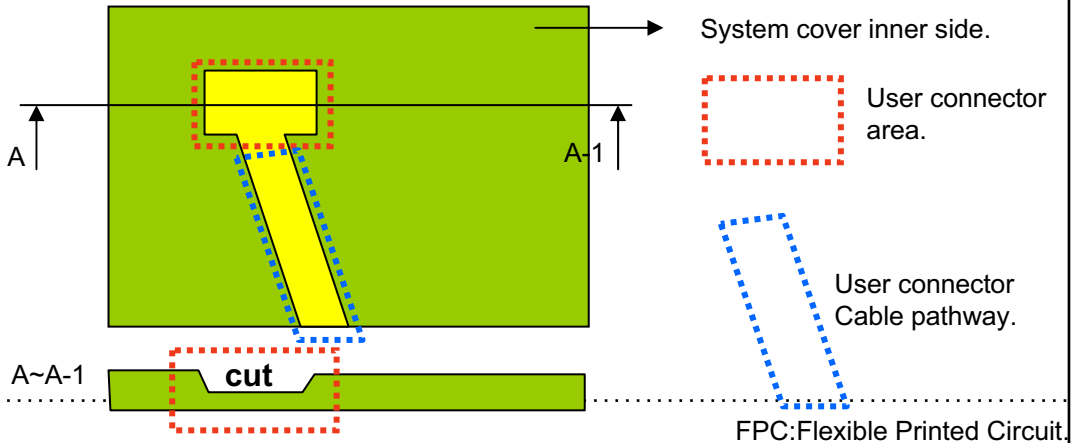
LP141WX5  
Liquid Crystal Display

### Product Specification

#### LGD Proposal for system cover design.

3	Gap check for securing the enough gap between LCM and System hinge.	
<p>LCM Reflector Side</p> <p>Side Mount Screw Hole (2ea)</p> <p>Hinge</p> <p>GAP: Min2.0mm</p> <p>COF (D-IC)</p> <p>("I" TYPE)</p> <p>("L" TYPE)</p>		
Define	1. At least 2.0mm of gap needs to be secured to prevent the shock related defects. 2. "L" type of hinge is recommended than "I" type under shock test.	
4	Checking the path of the System wire.	
<p>LCM Reflector Side</p> <p>Ok</p> <p>Bad</p> <p>Good</p>		
Define	1. COF area needs to be handled with care. 2. GOOD → Wire path design to system side. OK → Wire path is located between COFs. BAD → Wire path overlapped with COF area.	

**LGD Proposal for system cover design.**


5	Using a bracket on the top of LCM is not recommended.	
<div><p>bracket</p></div> <div><p>With bracket</p></div> <div><p>Without bracket</p></div>		
Define	1.Condition without bracket is good for mechanical noise,and can minimize the light leakage from deformation of bracket. 2.The results shows that there is no difference between the condition with or without bracket.	
6	Securing additional gap on CNT area..	
<div></div>		
Define	1.CNT area is specially sensitive against external stress,and additional gap by cutting on system cover will be helpful on removing the Ripple. 2.Using a thinner CNT will be better. (eg: FPC type)	



LP141WX5  
Liquid Crystal Display

### Product Specification


#### LGD Proposal for system cover design.

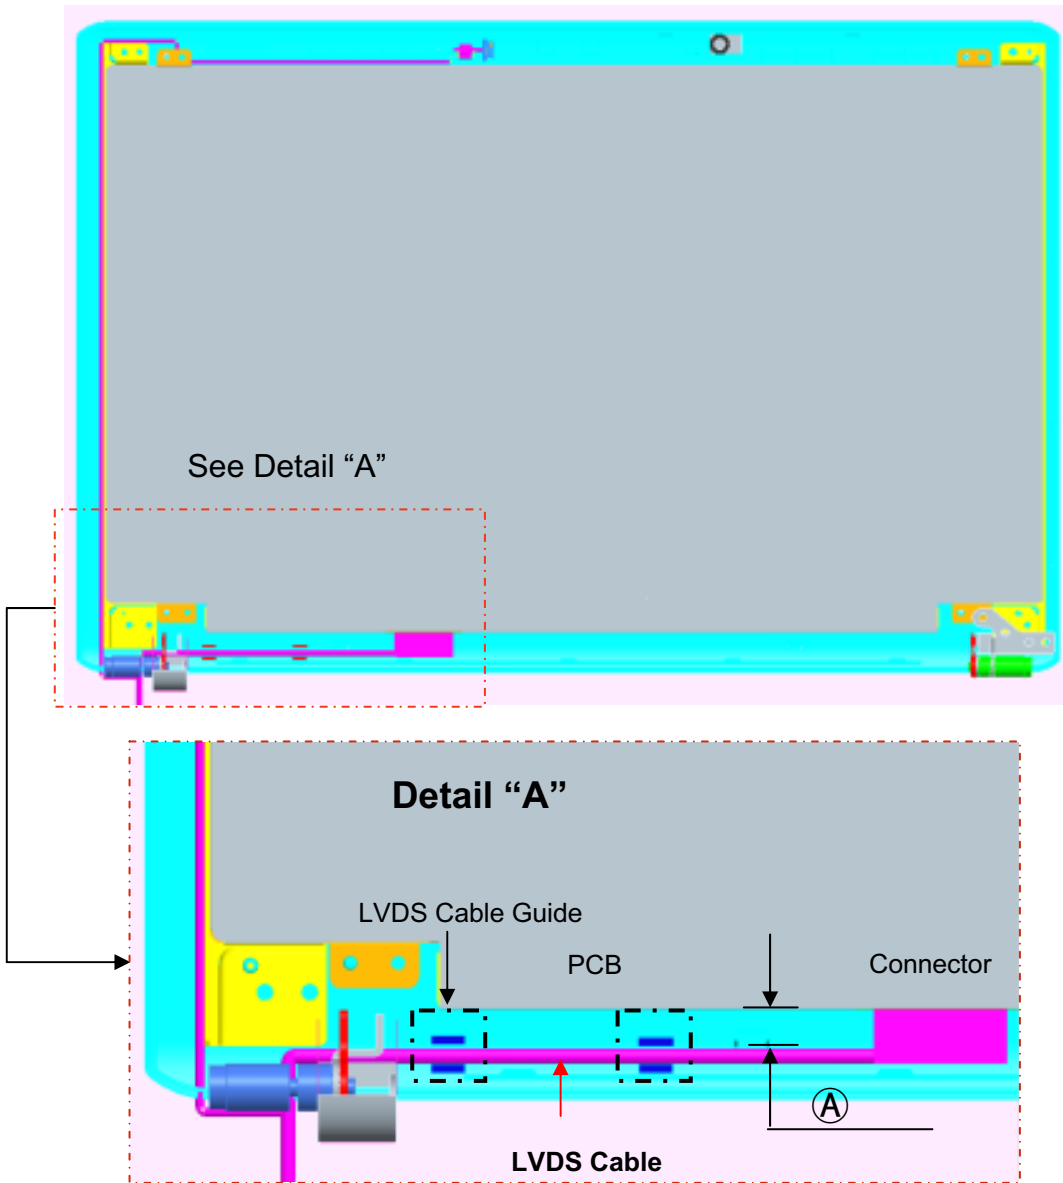7	Checking the path of System LVDS Cable.
 <p>The diagram illustrates the LVDS cable path for the LP141WX5 display. The main view shows the display panel with a red dashed box indicating the area for 'Detail A'. Detail A is a magnified view of the bottom-left corner, showing the LVDS cable (red) running along the PCB (blue) and connecting to the connector (yellow). The LVDS cable is guided by an LVDS Cable Guide (blue). A gap (A) is indicated between the cable and the PCB. The text 'See Detail "A"' is placed in the main view.</p>	
Notes	1. At least 1.0mm gap (A) is required to secure from any damage by overlapping system cable and LCM (This overlap may cause a Abnormal Display after hinge test)
	2."Flat" type of LVDS cable is more recommended than "Cylindrical" type . 3. Making LVDS Cable Guide will give better performance (Refer to detail "A")

LP141WX5  
Liquid Crystal Display

## Product Specification

## LGD Proposal for system cover design.

8	Securing additional gap between front cover & LCD at edge of front cover.
<div><p><b>No Good</b></p><p>"A" : Overlap between Front Cover &amp; Liquid Crystal area</p><p>Panel Size Front Bezel Open Size Active Area</p><p>Front Cover</p><p>Cell</p><p>Liquid Crystal</p><p>Supporter Main</p><p>Back Cover</p><p><b>Good</b></p><p>Front Cover</p><p>Supporter Main</p><p>Back Cover</p><p>Recess Depth(Ⓑ) : ?.?mm</p><p>Recesses Width(Ⓐ) : ?.?mm</p><p>※ Recess Width(Ⓐ) : Up / Down /Left /Right ※ Recess Depth(Ⓑ) : Up / Down /Left /Right</p></div>	
Notes	1.Active area which is filled with Liquid Crystal is very sensitive to external stress, so additional gap to make recess area on the edge of front cover will be helpful to prevent mechanical Ripple. (Dimension of Recess depends on each model design)

LP141WX5  
Liquid Crystal Display

## Product Specification

## 6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

LP141WX5  
Liquid Crystal Display

## Product Specification

## 7. International Standards

### 7-1. Safety

- a) UL 60950-1, Second Edition, Underwriters Laboratories Inc.  
Information Technology Equipment - Safety - Part 1 : General Requirements.
- b) CAN/CSA C22.2 No.60950-1-07, Second Edition, Canadian Standards Association.  
Information Technology Equipment - Safety - Part 1 : General Requirements.
- c) EN 60950-1:2006 + A11:2009, European Committee for Electrotechnical Standardization (CENELEC).  
Information Technology Equipment - Safety - Part 1 : General Requirements.
- d) IEC 60950-1:2005, Second Edition, The International Electrotechnical Commission (IEC).  
Information Technology Equipment - Safety - Part 1 : General Requirements.

### 7-2. EMC

- a) ANSI C63.4 "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."  
American National Standards Institute (ANSI), 2003.
- b) CISPR 22 "Information technology equipment – Radio disturbance characteristics – Limit and methods of measurement." International Special Committee on Radio Interference (CISPR), 2005.
- c) CISPR 13 "Sound and television broadcast receivers and associated equipment – Radio disturbance characteristics – Limits and method of measurement." International Special Committee on Radio Interference (CISPR), 2006.

### 7-3. Environment

- a) RoHS, Directive 2002/95/EC of the European Parliament and of the council of 27 January 2003

LP141WX5  
Liquid Crystal Display

## Product Specification

## 8. Packing

### 8-1. Designation of Lot Mark

#### a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

D : YEAR

F ~ M : SERIAL NO.

#### Note

##### 1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

##### 2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

#### b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.

This is subject to change without prior notice.

### 8-2. Packing Form

a) Package quantity in one box : 30 pcs

b) Box Size : 490mm × 393mm × 284mm

LP141WX5  
Liquid Crystal Display

## Product Specification

## 9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

### 9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

### 9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :  
 $V = \pm 200\text{mV}$  (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)  
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

LP141WX5  
Liquid Crystal Display

## Product Specification

**9-3. ELECTROSTATIC DISCHARGE CONTROL**

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

**9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE**

Strong light exposure causes degradation of polarizer and color filter.

**9-5. STORAGE**

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.  
It is recommended that they be stored in the container in which they were shipped.

**9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM**

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer.  
This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.  
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



LP141WX5  
Liquid Crystal Display

## Product Specification

### APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Header	0	00 Header	00	00000000
	1	01 Header	FF	11111111
	2	02 Header	FF	11111111
	3	03 Header	FF	11111111
	4	04 Header	FF	11111111
	5	05 Header	FF	11111111
	6	06 Header	FF	11111111
	7	07 Header	00	00000000
Vendor / Product	8	08 ID Manufacture Name LGD	30	00110000
	9	09 ID Manufacture Name	E4	11100100
	10	0A ID Product Code 0249h	49	01001001
	11	0B ( Hex LSB first )	02	00000010
	12	0C ID Serial No. - Optional ("00h" if not used, Number Only and LSB First)	00	00000000
	13	0D ID Serial No. - Optional ("00h" if not used, Number Only and LSB First)	00	00000000
	14	0E ID Serial No. - Optional ("00h" if not used, Number Only and LSB First)	00	00000000
	15	0F ID Serial No. - Optional ("00h" if not used, Number Only and LSB First)	00	00000000
	16	10 Week of Manufacture - Optional 00 weeks	00	00000000
	17	11 Year of Manufacture 2010 years	14	00010100
Display	18	12 EDID structure version # = 1	01	00000001
	19	13 EDID revision # = 4	04	00000100
	20	14 Video Input Definition = Input is a Digital Video signal Interface , Colo Bit Depth : 6 Bits per Primary Color , Digital Video Interface Standard Supported: DisplayPort is supported	95	10010101
	21	15 Horizontal Screen Size (Rounded cm) = 30 cm	1E	00011110
	22	16 Vertical Screen Size (Rounded cm) = 19 cm	13	00010011
	23	17 Display Transfer Characteristic (Gamma) = (gamma*100)-100 = Example: (2.2*100)-100=120 = 2.2 Gamma	78	01111000
	24	18 Feature Support [ Display Power Management(DPM) : Standby Mode is not supported, Suspend Mode is not supported, Active Off = Very Low Power is not supported, Supported Color Encoding Formats : RGB 4:4:4 , Other Feature Support Flags : No_sRGB, Preferred Timing Mode, No Display is continuous frequency (Multi-mode Base EDID and Extension Block)]	02	00000010
	25	19 Red/Green Low Bits (RcRy/GcGy)	95	10010101
Vendor / Product	26	1A Blue/White Low Bits (BcBy/WcWy)	D5	11010101
	27	1B Red X Rr = 0.580	94	10010100
	28	1C Red Y Ry = 0.345	58	01011000
	29	1D Green X Gx = 0.337	56	01010110
	30	1E Green Y Gy = 0.556	8E	10001110
	31	1F Blue X Bx = 0.159	28	00101000
	32	20 Blue Y By = 0.134	22	00100010
	33	21 White X Wx = 0.313	50	01010000
	34	22 White Y Wy = 0.329	54	01010100
	35	23 Established timing 1 ( Optional_00h if not used)	00	00000000
Established	36	24 Established timing 2 ( Optional_00h if not used)	00	00000000
	37	25 Manufacturer's timings ( Optional_00h if not used)	00	00000000
Standard Timing ID	38	26 Standard timing ID1 ( Optional_01h if not used)	01	00000001
	39	27 Standard timing ID1 ( Optional_01h if not used)	01	00000001
	40	28 Standard timing ID2 ( Optional_01h if not used)	01	00000001
	41	29 Standard timing ID2 ( Optional_01h if not used)	01	00000001
	42	2A Standard timing ID3 ( Optional_01h if not used)	01	00000001
	43	2B Standard timing ID3 ( Optional_01h if not used)	01	00000001
	44	2C Standard timing ID4 ( Optional_01h if not used)	01	00000001
	45	2D Standard timing ID4 ( Optional_01h if not used)	01	00000001
	46	2E Standard timing ID5 ( Optional_01h if not used)	01	00000001
	47	2F Standard timing ID5 ( Optional_01h if not used)	01	00000001
	48	30 Standard timing ID6 ( Optional_01h if not used)	01	00000001
	49	31 Standard timing ID6 ( Optional_01h if not used)	01	00000001
	50	32 Standard timing ID7 ( Optional_01h if not used)	01	00000001
	51	33 Standard timing ID7 ( Optional_01h if not used)	01	00000001
	52	34 Standard timing ID8 ( Optional_01h if not used)	01	00000001
	53	35 Standard timing ID8 ( Optional_01h if not used)	01	00000001



LP141WX5  
Liquid Crystal Display

## Product Specification

### APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #1	54 36	Pixel Clock/10,000 (LSB) 74.8 MHz @ 60.1Hz	38	00111000
	55 37	Pixel Clock/10,000 (MSB)	1D	00011101
	56 38	Horizontal Active (HA) (lower 8 bits) 1280 Pixels	00	00000000
	57 39	Horizontal Blanking (HB) (lower 8 bits) 192 Pixels	C0	11000000
	58 3A	Horizontal Active / Horizontal Blanking(HA HB)(upper 4:4bits)	50	01010000
	59 3B	Vertical Active (VA) 800 Lines	20	00100000
	60 3C	Vertical Blanking (VB)(DE Blanking typ for DE only panels) 46 Lines	2E	00101110
	61 3D	Vertical Active / Vertical Blanking (VA VB) (upper 4:4bits)	30	00110000
	62 3E	Horizontal Front Porch in pixels (HF) (lower 8 bits) 54 Pixels	36	00110110
	63 3F	Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 44 Pixels	2C	00101100
	64 40	Vertical Front Porch in lines (VF) (lower 4 bits) : Vertical Sync Phase Width in lines (VS) (lower 4 bits) 9 Lines : 8 L	98	10011000
	65 41	Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)	00	00000000
	66 42	Horizontal Video Image Size (mm)(lower 8 bits) 304 mm	30	00110000
	67 43	Vertical Video Image Size (mm)(lower 8 bits) 190 mm	BE	10111110
	68 44	Horizontal Image Size / Vertical Image Size (upper 4 bits)	10	00010000
	69 45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	70 46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
	71 47	Non-Interlace, Normal display, no stereo, Digital Separate [ Vsync_NEG, Hsync_POS (outside of V-sync)]	1A	00011010
Timing Descriptor #2	72 48	Pixel Clock/10,000 (LSB) 49.87 MHz @ 40.1Hz	7B	01111011
	73 49	Pixel Clock/10,000 (MSB)	13	00010011
	74 4A	Horizontal Active (HA) (lower 8 bits) 1280 Pixels	00	00000000
	75 4B	Horizontal Blanking (HB) (lower 8 bits) 192 Pixels	C0	11000000
	76 4C	Horizontal Active / Horizontal Blanking(HA HB)(upper 4:4bits)	50	01010000
	77 4D	Vertical Active (VA) 800 Lines	20	00100000
	78 4E	Vertical Blanking (VB)(DE Blanking typ for DE only panels) 46 Lines	2E	00101110
	79 4F	Vertical Active / Vertical Blanking (VA VB) (upper 4:4bits)	30	00110000
	80 50	Horizontal Front Porch in pixels (HF) (lower 8 bits) 54 Pixels	36	00110110
	81 51	Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 44 Pixels	2C	00101100
	82 52	Vertical Front Porch in lines (VF) (lower 4 bits) : Vertical Sync Phase Width in lines (VS) (lower 4 bits) 9 Lines : 8 L	98	10011000
	83 53	Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)	00	00000000
	84 54	Horizontal Video Image Size (mm)(lower 8 bits) 304 mm	30	00110000
	85 55	Vertical Video Image Size (mm)(lower 8 bits) 190 mm	BE	10111110
	86 56	Horizontal Image Size / Vertical Image Size (upper 4 bits)	10	00010000
	87 57	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	88 58	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
	89 59	Non-Interlace, Normal display, no stereo, Digital Separate [ Vsync_NEG, Hsync_POS (outside of V-sync)]	1A	00011010
Timing Descriptor #3	90 5A	Flag	00	00000000
	91 5B	Flag	00	00000000
	92 5C	Flag	00	00000000
	93 5D	Data Type Tag : Alphanumeric Data String (ASCII String)	FE	11111110
	94 5E	Flag	00	00000000
	95 5F	Dell P/N 1st Character = 6	36	00110110
	96 60	Dell P/N 2nd Character = H	48	01001000
	97 61	Dell P/N 3rd Character = W	57	01010111
	98 62	Dell P/N 4th Character = V	56	01010110
	99 63	Dell P/N 5th Character = V	56	01010110
	100 64	EDID Revision Build Name = MP(X-Build) , Revision # = A00	80	10000000
	101 65	Manufacturer P/N = 1	31	00110001
	102 66	Manufacturer P/N = 4	34	00110100
	103 67	Manufacturer P/N = 1	31	00110001
	104 68	Manufacturer P/N = W	57	01010111
	105 69	Manufacturer P/N = X	58	01011000
	106 6A	Manufacturer P/N = 5	35	00110101
	107 6B	Manufacturer P/N (If < 13 char, then terminate with ASC II code 0Ah, set remaining char = 20h)	0A	00001010



LP141WX5  
Liquid Crystal Display

## Product Specification

### APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #4	108	6C Flag	00	00000000
	109	6D Flag	00	00000000
	110	6E Flag	00	00000000
	111	6F Data Type Tag : Descriptor Defined by manufacturer	00	00000000
	112	70 Flag	00	00000000
	113	71 Color Management [ No +2 FRC Support, True Color Depth : 6 bit ]	00	00000000
	114	72 Panel Type [ WLED ], Configuration [ Single light bar ], Number Lamp or LED Light Bar [ one ]	41	01000001
	115	73 Frame Rate Details [ Minimum Frame Rate : 40Hz, Maximum Frame Rate : 65Hz , Tonon provides native Intel DRRS / sDRRS support ]	31	00110001
	116	74 Controller Interface and Maximum Luminance [ SMBUS type, 220 nit ]	16	00010110
	117	75 Front Surface / Polarizer [ Anti-Glare, No Transflective ], Pixel Structure [ RGB v-stripe ]	00	00000000
	118	76 Multi-Media Features [ Color Management : NTSC, Dynamic Backlight Control : No ]	00	00000000
	119	77 Multi-Media Features [ Motion Blur : No support , Active Gamma Control : No support ]	00	00000000
	120	78 Special Features [ Wireless Enhancement Hardware : No support , In-Cell Scanner : No support ]	00	00000000
	121	79 Special Features [ Number of LVDS channels or eDP lanes : one , Overdrive : No , Interface : eDP , In-Cell Touch Support : No ]	09	00001001
	122	7A Special Features [ BiST Support : yes , Electronic Privacy : No electronic privacy hardware support , 3-D Support : No ]	01	00000001
	123	7B (If <13 char--> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	0A	00001010
	124	7C (If <13 char--> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	20	00100000
	125	7D (If <13 char--> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	20	00100000
Checksum	126	7E Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)	00	00000000
	127	7F Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)	94	10010100