

2SK1194  
( F05E23 )

230V 0.5A

FEATURES

Applicable to 4V drive.  
The static Rds(on) is small.  
Built-in ZD for Gate Protection.

APPLICATION


DC/DC converters  
Power supplies of DC 12-24V input  
Product related to  
Integrated Service Digital Network

RATINGS

Absolute Maximum Ratings (Tc = 25 )

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55 ~ 150	
Channel Temperature	Tch		150	
Drain-Source Voltage	VDSS		230	V
Gate-Source Voltage	VGSS		± 20	
Continuous Drain Current (DC )	ID		0.5	A
Continuous Drain Current (Peak)	IDP		1	
Continuous Source Current (DC )	IS		0.5	
Total Power Dissipation	PT		6	W

OUTLINE DIMENSIONS

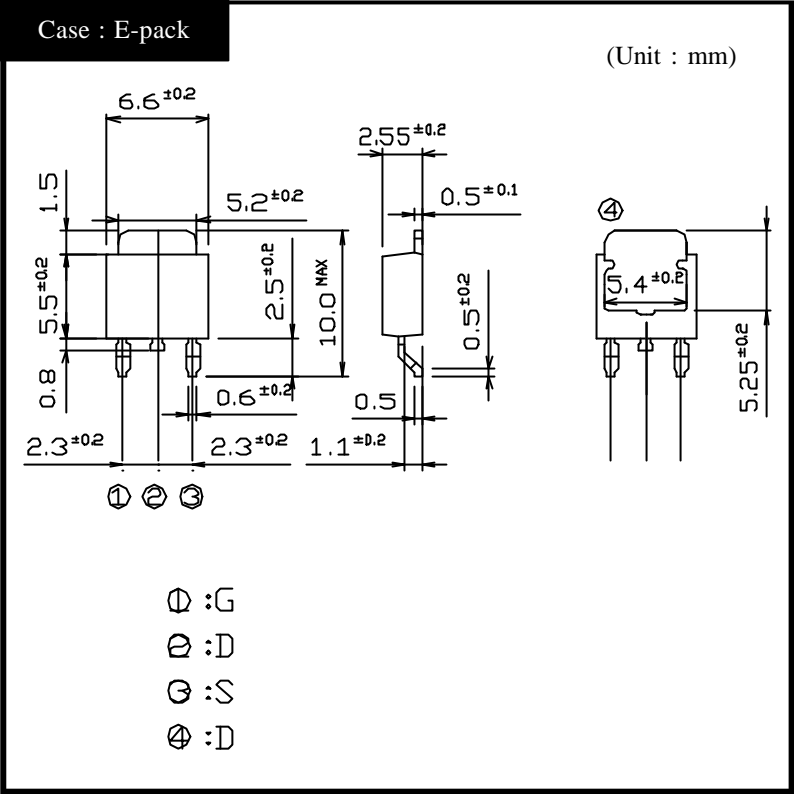


●Electrical Characteristics  $T_c = 25^\circ\text{C}$ 


Item	Symbole	Conditions	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = 250\ \mu\text{A}$ , $V_{GS} = 0\text{V}$	230			V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 230\text{V}$ , $V_{GS} = 0\text{V}$			250	$\mu\text{A}$
Gate-Source Leakage Current	$I_{GSS}$	$V_{GS} = \pm 20\text{V}$ , $V_{DS} = 0\text{V}$			$\pm 0.1$	
Forward Transconductance	$g_{fs}$	$I_D = 0.5\text{A}$ , $V_{DS} = 10\text{V}$	0.2	0.4		S
Static Drain-Source On-state Resistance	$R_{DS(ON)}$	$I_D = 0.5\text{A}$ , $V_{GS} = 10\text{V}$		5.5	8	$\Omega$
Gate Threshold Voltage	$V_{TH}$	$I_D = 0.2\text{mA}$ , $V_{DS} = 10\text{V}$	2	3	4	V
Source-Drain Diode Forward Voltage	$V_{SD}$	$I_S = 0.5\text{A}$ , $V_{GS} = 0\text{V}$			1.5	
Thermal Resistance	$\theta_{jc}$	junction to case			20.8	$^\circ\text{C}/\text{W}$
Total Gate Charge	$Q_g$	$V_{GS} = 10\text{V}$ , $I_D = 0.5\text{A}$ , $V_{DD} = 200\text{V}$		2.7		nC
Input Capacitance	$C_{iss}$	$V_{DS} = 10\text{V}$ , $V_{GS} = 0\text{V}$ , $f = 1\text{MHz}$		45		pF
Reverse Transfer Capacitance	$C_{rss}$			4.5		
Output Capacitance	$C_{oss}$			30		
Turn-On Time	$t_{on}$	$I_D = 0.5\text{A}$ , $V_{GS} = 10\text{V}$ , $R_L = 200\ \Omega$		30	60	ns
Turn-Off Time	$t_{off}$			50	100	

2SK1194


Transfer Characteristics

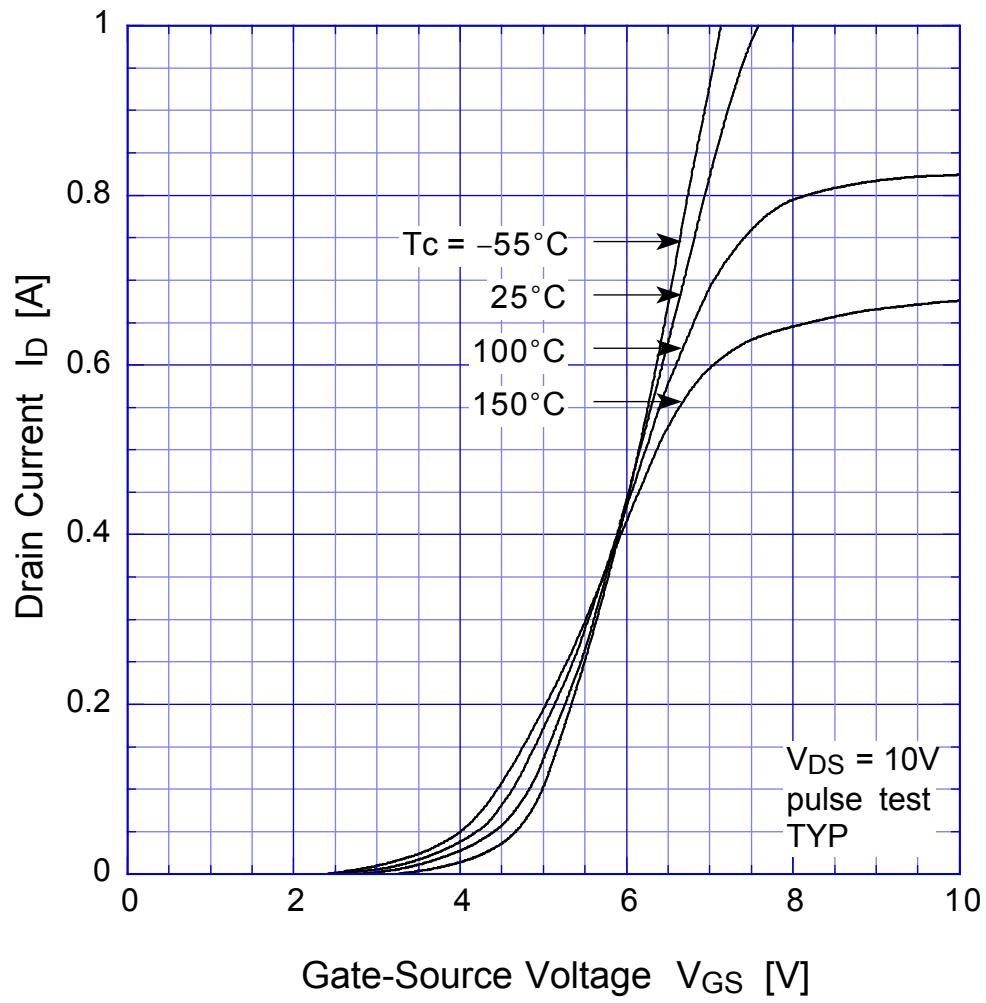

## 2SK1194 Static Drain-Source On-state Resistance

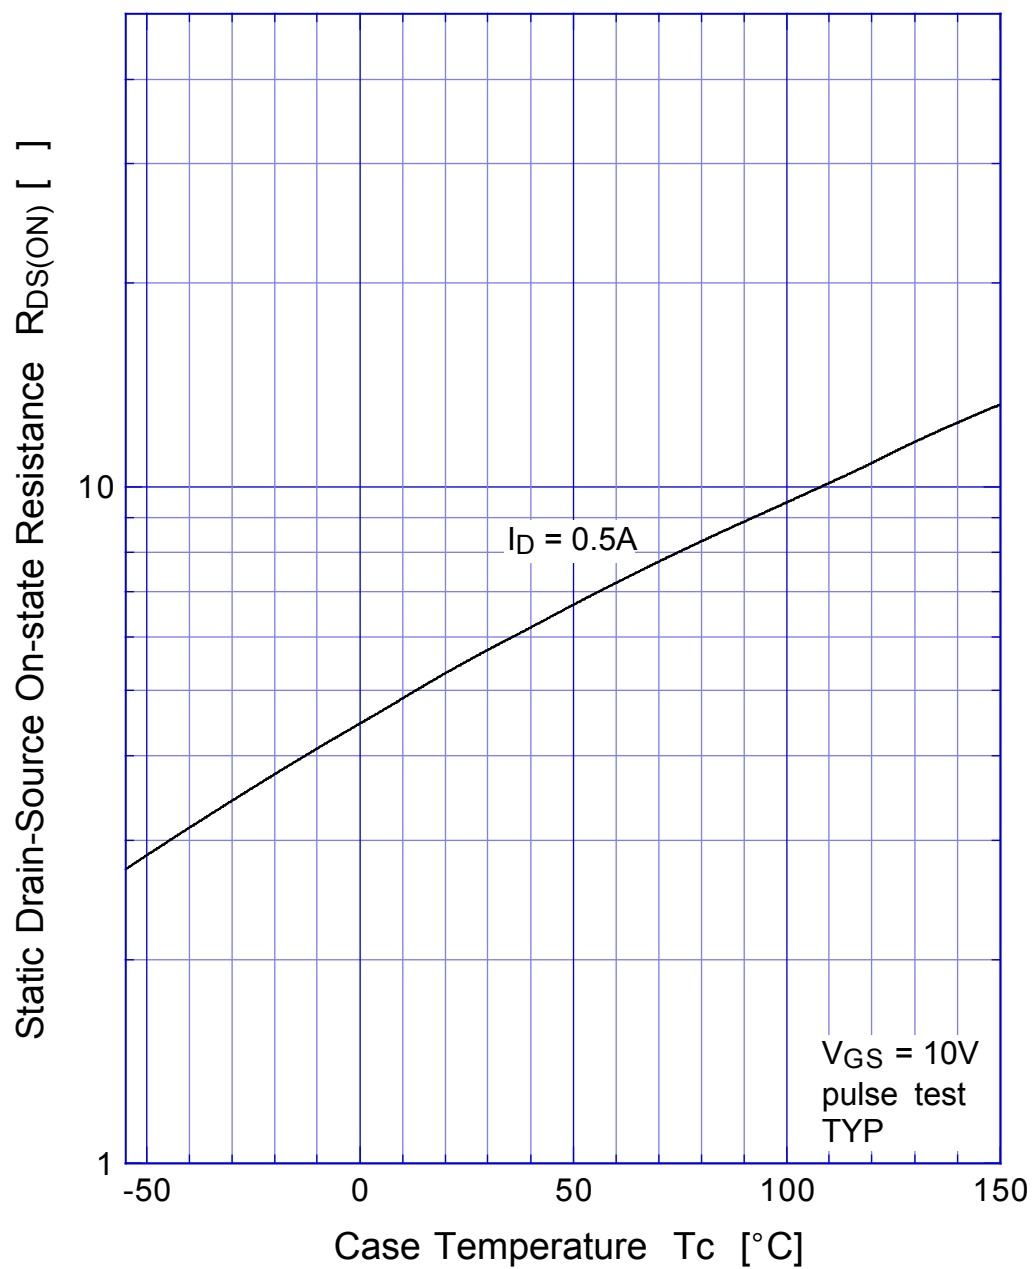


## 2SK1194 Gate Threshold Voltage

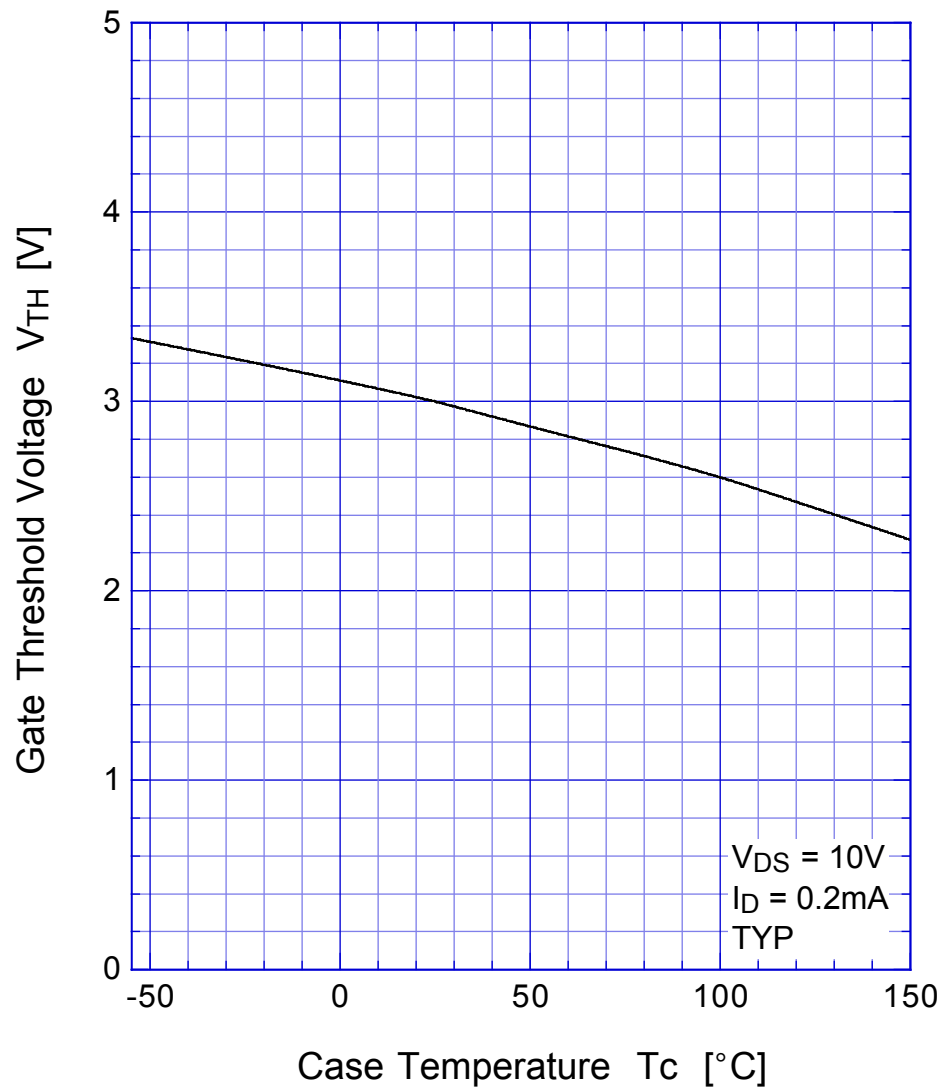


2SK1194


Safe Operating Area

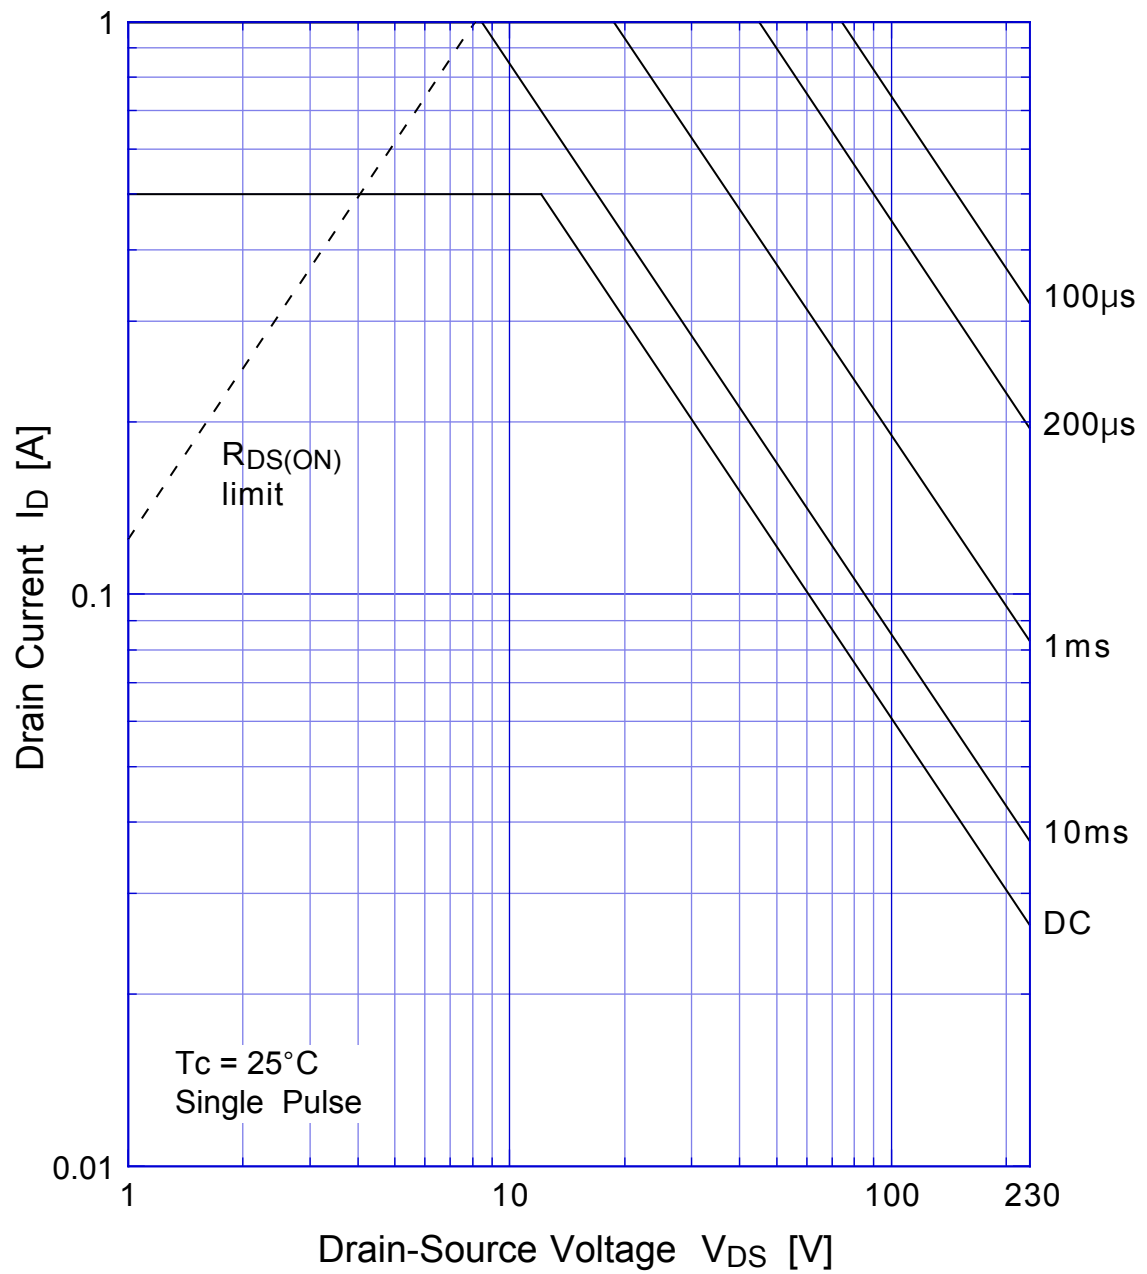

# 2SK1194      Transient Thermal Impedance

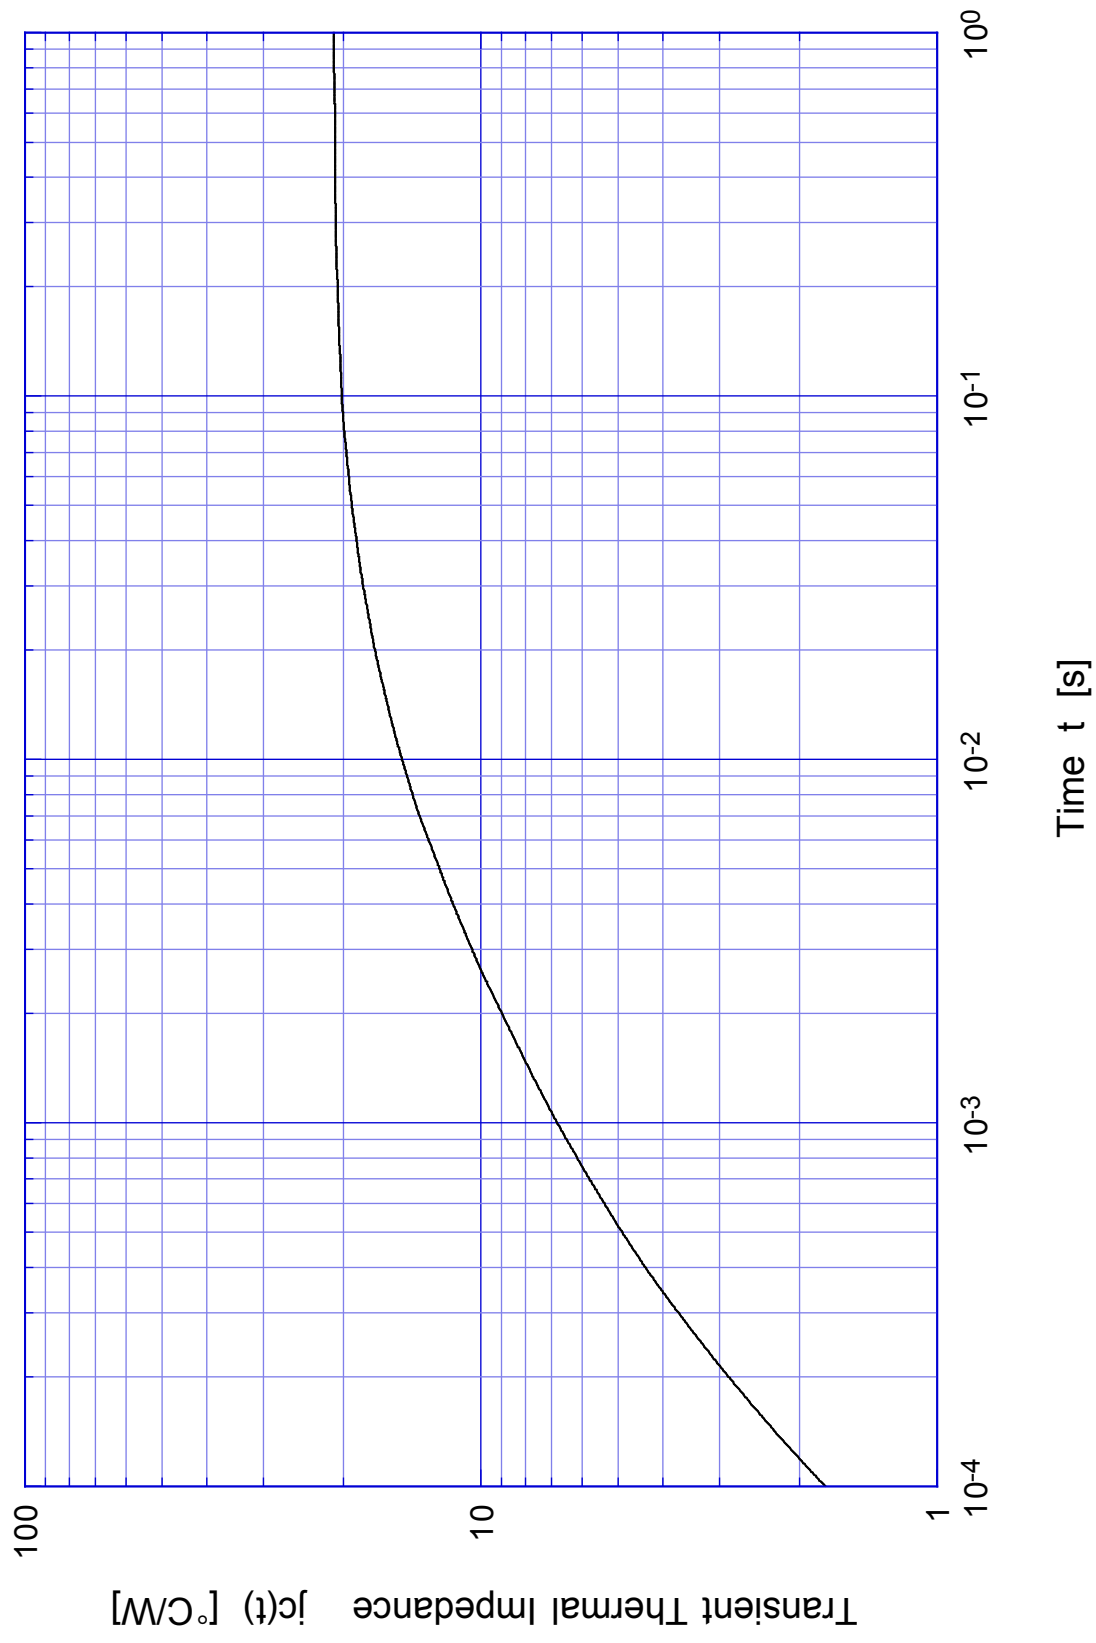


2SK1194      Capacitance

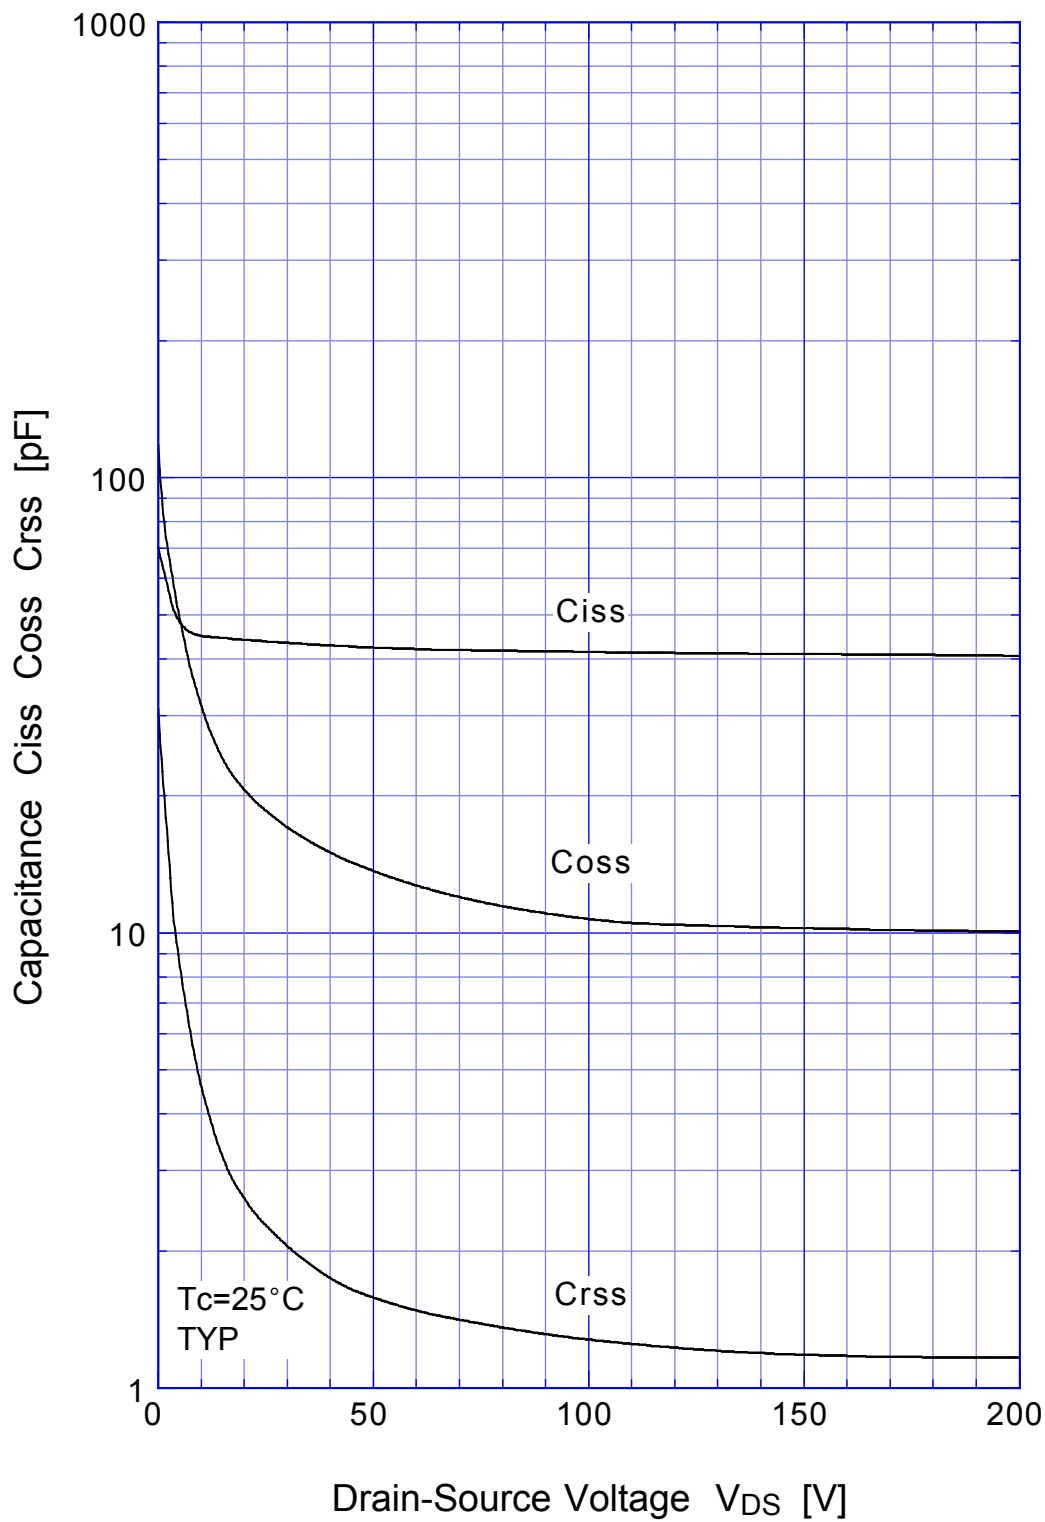



2SK1194

Power Derating

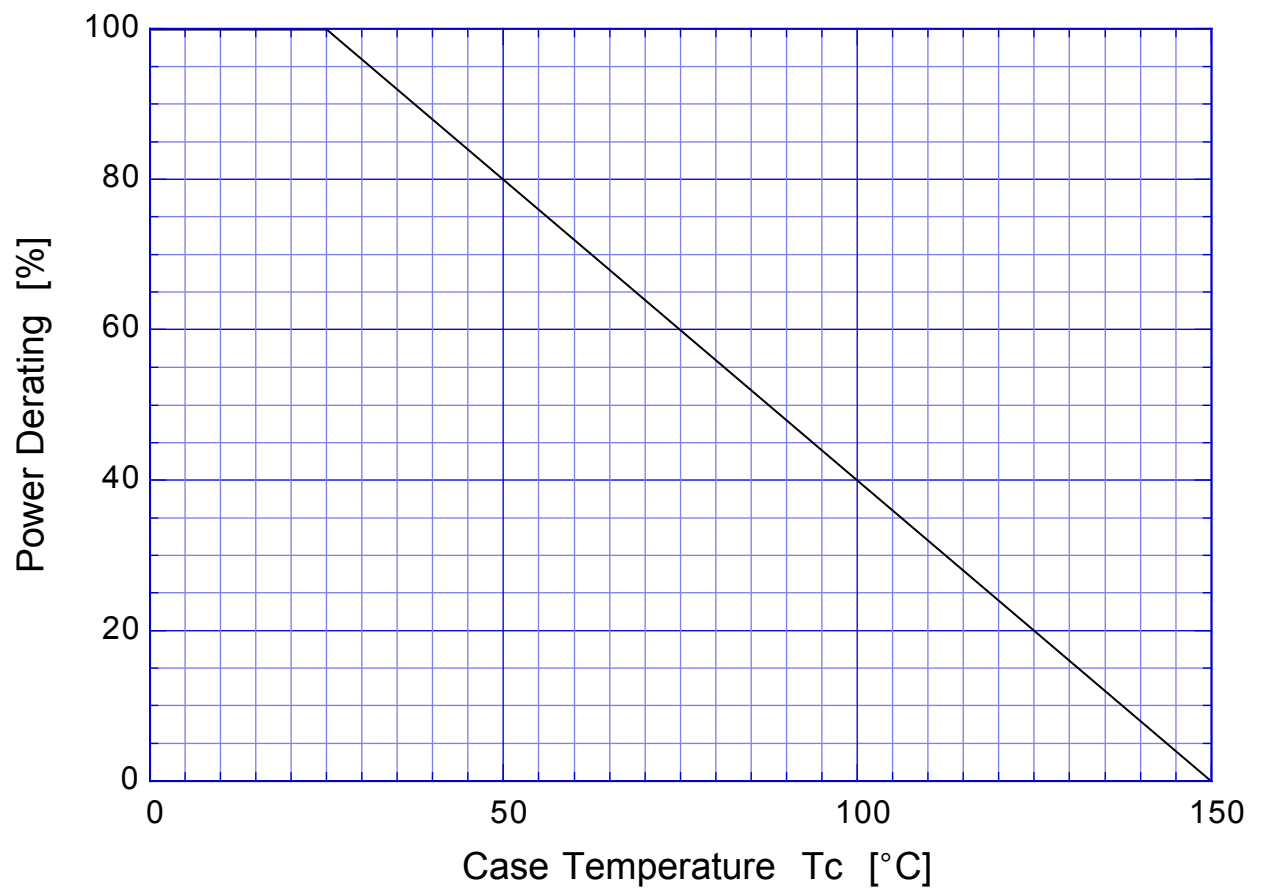

2SK1194

# Gate Charge Characteristics

