



Preliminary

General Description

The MSU30x2 is a monolithic talking microcomputer that can memorize voice up to 60/90/120 seconds using MOSEL qualified coding method(MPCM). It's an integration of traditional 4-bit microcomputer and voice chip with minimal external components. LCD driver and miscellaneous interface are provided for versatile applications. With more than bit 10K ROM/RAM inside, this chip meets every intelligent novelty. Customer requested function and voice data will be built in by changing masks during fabrication.

Hardware Features

- Low current consumption
- Maximal function with minimal cost
- Current output could drive 8 ohm speaker with a transistor, Vout could drive buzzer directly.
- The voice content is stored up to 120 seconds at 6 KHz (B0000h) and can be separated to 256 sections.
- Duration of each section can be different and is multiples of 100h.
- Duration of section with appended memory-less mute is up to 40 seconds (100000h).
- Each trigger can access a sentence, up to 256 sentences could be access. 1024 entry count are provided.
- Working at 2.4V through 6.0V
- Precise voice sample rate 8 KHz is provided.
- Auto ramp up and ramp down.
- Halt mode is provided.
- Very low current consumption at Halt mode.
- LCD driver provided, can drive up to 75 segments
- Built-In clock generator
- Built-In doubler, halver, tripler
- Internal program ROM : 1024 x 15 bits;
- Internal program RAM : 64 x 4 bits
- Internal stack RAM: 4x10 bits.
- Two 4-bit input ports
- Two 4-bit input/output ports
- One 4-bit output port



Software Features

- 76 instructions, in 39 mnemonics
- 4-level subroutine nesting (also used for interrupt)
- Two external factors (INT, S&M) for interrupt
- Two internal factors (timer, divider) for interrupt

Sample Applications

- handy game with LCD
- versatile timepiece with LCD
- talking timer with LCD
- intelligent calculator with LCD
- smart stationery with LCD
- talking home electronics with LCD
- talking education kit with LCD

Development Supports

- Development tools are provided
- Software / Hardware programming guide is provided
- OTP U73061 is to be available

MSM9068 Developing Card
MSM9088 Program code emulation board
MSM9018 120" Sound emulation board

Development Supports


- Pid321 Voice Smart Programmer's Guide
- Pid345 Voice Smart ICE M9068 User's Manual

Mask Options


- either open or hold transistor on S port & M port
- either pull down or pull up on Interrupt switch
- either leading edge or trailing edge on Interrupt edge
- either power back-up activated or not when power on
- either with reset or not when power on
- either 8 ms or 2 ms chattering removal time on S port & M port
- either slow (by 15.625 ms) or fast (by 224.14 us) set time timer
- either fast system clock (Fosc) or slow system clock (Fosc / 2)
- either Rosc or 32768 Hz crystal to play voice
- LCD display frequency : (1) 128 Hz /170.7 Hz (2) 64Hz /85.3 Hz (3) 32Hz /42.7Hz
- LCD driver : (1) static (2) 1/2 bias 1/2 duty (3) 1/2 bias 1/3 duty

Capacity of each device

	Device	Voice ROM Size	Word Count	Sentence Count	Entry Count	LCD segment	LCD	LCDB	LCDP
1	U3042	B0000hx5	256	256	1024	25x3	Yes	Yes	Yes
2	U3032	81000hx5	256	256	1024	25x3	Yes	Yes	Yes
3	U3022	58000hx5	256	256	1024	25x3	Yes	Yes	Yes



Block Diagram

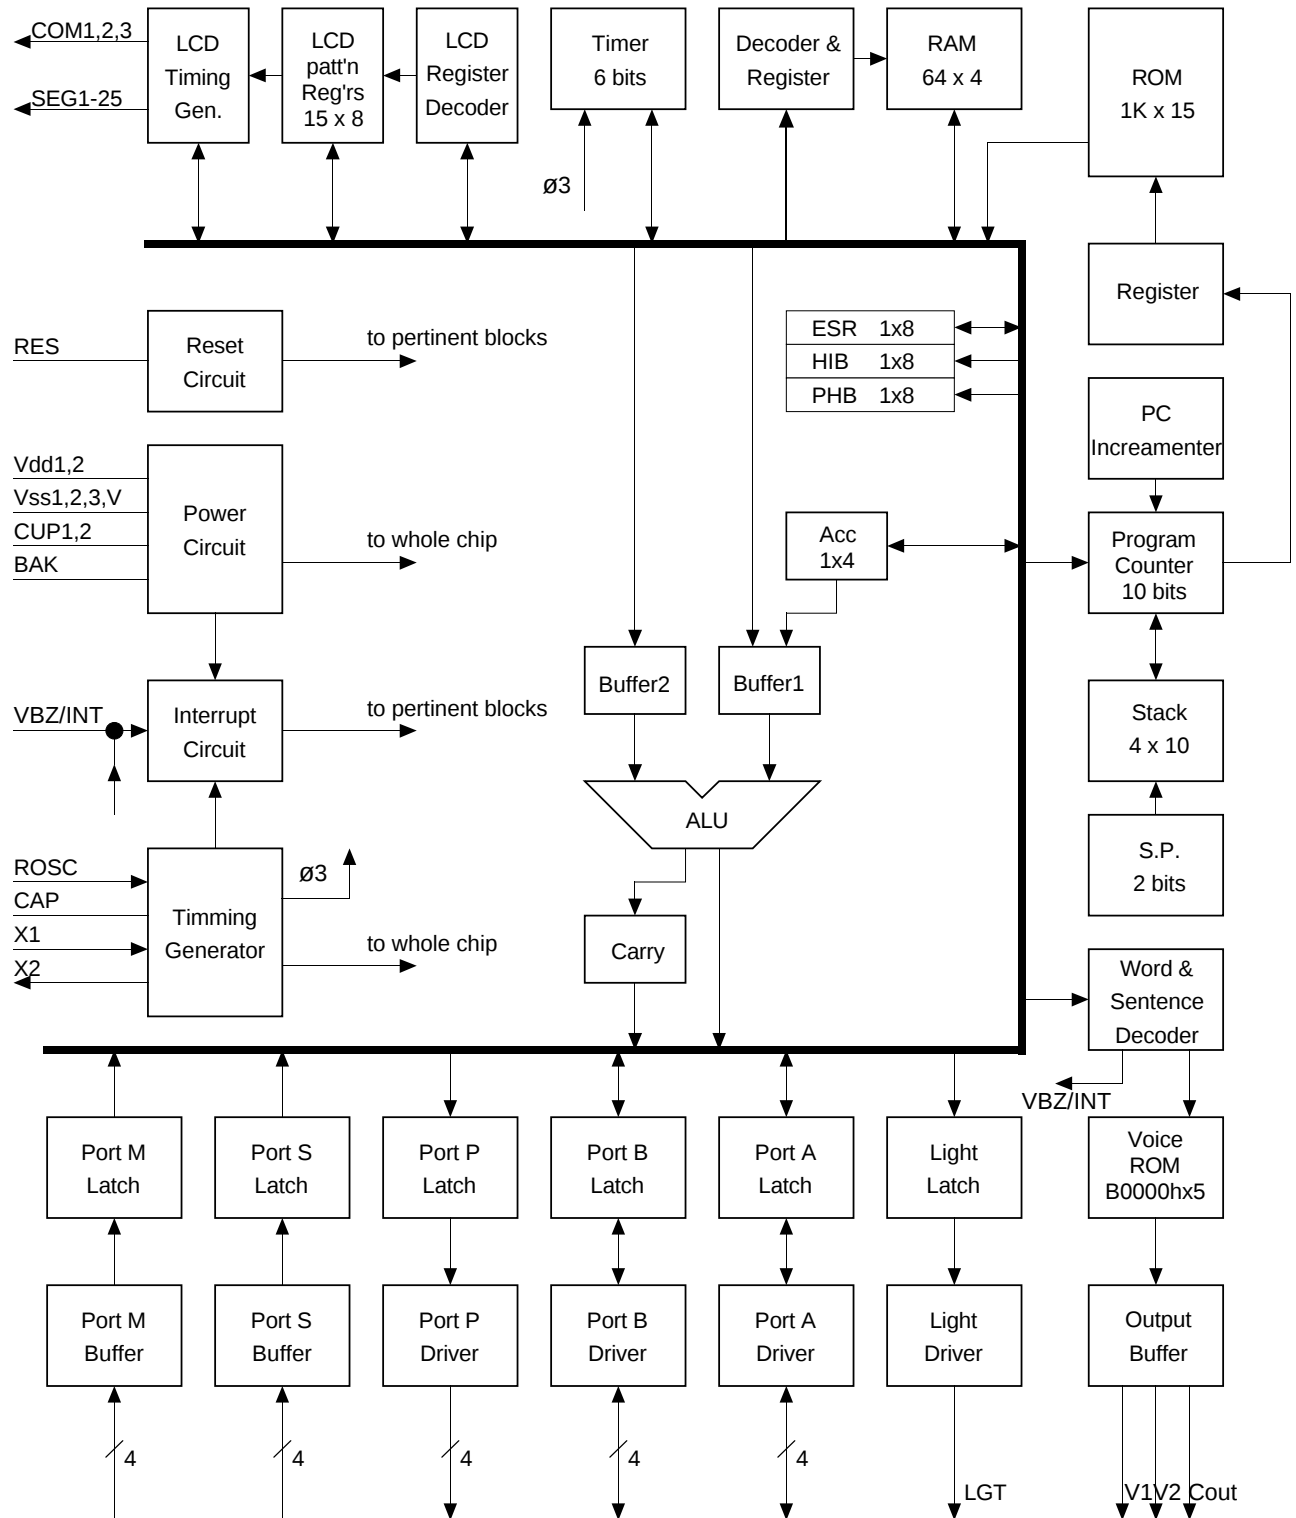



Signal Summary

dice Pad #	84L PLCC pin #	Signal symbol		Active	I/O	F u n c t i o n s
63		Vdd1	1		Power	Positive power supply for CPU function block
64		Vreg	1		O	Voltage regulator
65, 66		CUP1,2	2		I	Voltage doubler capacitor
67		X1	1		I	Crystal Oscillator input, 32768 Hz
68		X2	1		O	Crystal Oscillator Output, 32768 Hz
69		COM1	1		O	Common plate for LCD panel
70, 1-24		SEG1-25	25		O	25 segment outputs for LCD panel
25, 26		COM3,2	2		O	Common plate for LCD panel
27		BAK	1		Power	Negative power supply
28, 29		Vss1,2	2		Power	BackUp negative power supply
30, 31		S4,S3	2		I	One-way input port; note 1
32		LGT	1		O	Output port
33-36		IOA1-4	4		I/O	Bidirectional Input / output port
37		RES	1	H	I	System reset
38		NC2	1			No connection
39		NC3	1			No connection
40		Vdd2	1		Power	Positive supply for voice function block, internally connected to pad Vdd1
41		Rosc	1		I	Oscillator Resistor for voice function block
42		VssV	1		Power	Negative power supply for voice signal
43		Cout	1		O	Audio signal current output
44, 45		Vout1,2	2		O	Audio signal voltage output
46-48		IOB1,2,3	3		I/O	Bidirectional Input / Output port
49		NC1	1		I/O	No connection
50		IOB4	1			Bidirectional Input / Output port
51		VBZ/INT	1		I/O	Busy status output; internally connected to INT (interrupt request) pin of CPU
52-55		P1,2,3,4	4		O	One-way output port, 4 bits
56-59		M1,2,3,4	4		I	One-way input port; note 1
60		NC4	1		NC	No connection
61,62		S2,1	2		I	One-way input port, note 1

Note 1. with chatter removal time for either 8 ms (ph8) or 2 ms (ph6)



Signals Descriptions

Cout

Cout is tristate during standby.

Cout has zero current output when sound data is zero. Cout has full current output when sound data is the highest. Cout has half of full current output when sound is silence at middle data value. Cout has half of full current output when playing sound at appended memory-less mute.

The bypass Cout Resistor is used to bypass the audio output current from Cout. This bypassing extra current to ground gives a way to prevent the saturation of audio waveform amplified by transistor. This Resistance is 470 ohm typically. It always is not very small. Or user can let it open if the transistor has a fair beta value.

A transistor with beta value 150 is sufficient for typical applications. Larger beta value get larger sound but may have the amplified waveform saturated.

Vout1, Vout2

They are tristate during standby state.

These two pins can drive buzzer directly. The piezo buzzer used should have its resonant frequency at the center of your sound frequency domain or you are unable to play you sound good by this buzzer.

For instance, you have your sound spans over frequency from 100 Hz through 1 KHz. A buzzer with resonant frequency at 300 Hz will play this sound good. A buzzer with resonant frequency at 1 KHz will distort the sound very much because that most of the energy of the playback sound is unable to be played by this buzzer.

When using precise sample rate, these Vout 1 & 2 do not work.

Terms

to be available

Absolute Maximum Rating (Vdd=3.0V, Vss=Vss2=0.0V, Vss3=0.0V/-1.5V)

Symbol	Rating	Unit
Vss1	1.2-1.8	V
BAK	0.0-0.6	V
Vreg	0.0-0.6	V
CAP	Vreg-Vd	V
X1	Vreg-Vdd	V
S1,2,3,4	Vss-Vdd	V
M1,2,3,4	Vss-Vdd	V
(IOA1,2,3,4)TG0,1,2,3	Vss-Vdd	V
IOB1,2,3,4	Vss-Vdd	V
VBZ/INT	Vss-Vdd	V
RESET	Vss-Vdd	V

Symbol	Rating	Unit
Rosc	Vss-Vdd	V
X2	Vreg-Vdd	V
PWR(ALM)	Vss-Vdd	V
#EB2	Vss-Vdd	V
P1,2,3,4	Vss3-Vdd	V
SEG1-25	Vss3-Vdd	V
COM1,2,3	Vss3-Vdd	V
CUP1,2	Vss3-Vdd	V
Vout1,2	Vss-Vdd	V
T(operating)	-60-+60	Degree C
T(storage)	-55-+125	Degree C

Common Plate Usage

	Static	1/2 duty	1/3 duty
COM1	V	V	V
COM2	-	V	V
COM2	-	-	V
Alternating Frequency	32 Hz	32 Hz	43 Hz

Operating Conditions

Timing	Description	Min.	Typ.	Max.	Unit	Condition
T A	Ambient temperature under bias	0	2.5	70	°C	
Vdd	Snpply voltage	2.4	4.5	6.0	V	Vss=0V
Xosc	Oscillation frequency for CPU	32768	32768	32768	Hz	
Vosc	Oscillation frequency for playing voice		6000		Hz	

AC Characteristics at 4.5 V & 6 KHz S.R.

Timing		Min.	Typ.	Max.	Remarks

**DC Characteristics at 3.0 Vdd**

Symbol	Name	Valid	Min.	Typ.	Max.	Unit	Remarks
I _{sb}	stand by I	Vdd	-	8	-	uA	
I _{op}	operation I	Vdd	-	100	-	uA	
I _{ohv}	output high I	Vouts	-	-	-	mA	
I _{oLv}	output low I	Vouts	-	-	-	mA	
I _{co}	current output	Cout	-	2.5	-	mA	
		Cout	-	-	-	mA	
d F/F	frequency stability		-5	-	5	%	[Fosc(3.0V)-Fosc(2.7V)]/Fosc(3.0V)
d F/F	frequency variation		-10	-	10	%	6 KHz S.R., 680 kohm Rosc
R _{osc}	oscillation R	Rosc	-	680	-	kohm	S.R.=6000 Hz
		Rosc	-	620	-	kohm	S.R.=8000 Hz

DC Characteristics at 4.5 Vdd

Symbol	Name	Valid	Min.	Typ.	Max.	Unit	Remarks
I _{sb}	stand by I	Vdd	-	10	-	uA	
I _{op}	operation I	Vdd	-	500	-	uA	
I _{ohv}	output high I	Vouts	-	-	-	mA	
I _{oLv}	output low I	Vouts	-	-	-	mA	
I _{co}	current output	Cout	-	4	-	mA	
		Cout	-	-	-	mA	
V _{ohp}	o/p high V	P port	*-0.4V	-		V	I _{oh} = -400 uA
V _{oLp}	o/p low V	P port		-	*+0.4V	V	I _{oL} = 400 uA
V _{ohw}	o/p low V	PWR	*-0.4V	-		V	I _{oh} = -1 mA
V _{oLw}	o/p high V	PWR		-	*+0.4V	V	I _{oL} = 1 mA
V _{ohio}	o/p low V	i/o port	*-0.4V	-		V	I _{oh} = -100 uA
V _{oLio}	o/p high V	i/o port		-	*+0.4V	V	I _{oL} = 100 uA
V _{ohc}	o/p low V	Com	*-0.4V	-		V	I _{oh} = -4 uA
V _{oLc}	o/p high V	Com		-	*+0.4V	V	I _{oL} = 4 uA
V _{ohg}	o/p low V	Seg's	*-0.4V	-		V	I _{oh} = -0.4 uA
V _{oLg}	o/p high V	Seg's		-	*+0.4V	V	I _{oL} = 0.4 uA
d F/F	frequency stability		-5	-	5	%	[Fosc(4.5V)-Fosc(4.0V)]/Fosc(4.5V)
d F/F	frequency variation		-10	-	10	%	6 KHz S.R., 680 kohm Rosc
R _{isn}	input R when on	S port	-	330	-	kohm	pulldown X'tor=on & note 1
R _{isf}	input R when off	S port	-	30	-	kohm	pulldown X'tor=off, halt mode & note 1
R _{imn}	input R when on	M port	-	30	-	kohm	pulldown X'tor=on & note 1
R _{imf}	input R when off	M port	-	30	-	kohm	pulldown X'tor=off, halt mode & note 1
R _{inh}	input R	VBZ,INT	-	140	-	kohm	Vss2=0V, Vi=Vdd, VBZ=high
R _{inL}	input R	VBZ,INT	-	3	-	kohm	Vss2=0V, Vi=Vdd, VBZ=low
R _{ir}	input R	RESET	-	18	-	kohm	Vss2=0V, Vi=Vdd
R _{osc}	oscillation R	Rosc	-	680	-	kohm	S.R.=6000 Hz
		Rosc	-	620	-	kohm	S.R.=8000 Hz

Note 1. Vss2=0V, Vi=Vss2+0.4V

Note 2. *:= Vdd



Instruction Set Summary

Syntax	Description
1 ADC A, Rm	Addition with Carry
2 ADC Wn, d	"
3 ADCS A, Rm	ADC and store
4 ADCS Wn, d	"
5 ADD A, Rm	addition
6 ADD Wn, d	"
7 ADDS A, Rm	ADD and store
8 ADDS Wn, d	"
9 ADL A, Rm	addition logical
10 ADL Wn, d	"
11 ADLS A, Rm	ADL and store
12 ADLS Wn, d	"
13 AND A, Rm	move the AND result to Accumulator
14 AND Wn, d	"
15 ANDS A, Rm	AND and store
16 ANDS Wn, d	"
17 CALL d10	call the subroutine at address d10
18 CLRM d7	turn the LGT and clear modes
19 CLRS d9	clear setting
20 HALT	halt the processor
21 IN Rm, PA	input to Rm from port A
22 IN Rm, PB	input to Rm from port B
23 IN Rm, PS	input to Rm from port S
24 IN Rm, PM	input to Rm from port M
25 INM Rm, PA	input to Rm from port g
26 INM Rm, PB	"
27 JC d10	jump if Carry set
28 JMP d10	jump absolute
29 JNC d10	jump if non-Carry
30 JNZ d10	jump if non-zero
31 JPK d10	jump on bit k value
32 JZ d10	jump if zero
33 LCD Lx, Rm	write number to LCD w/zero
34 LCDB Lx, Rm	write number to LCD w/blank
35 LCDP Lx, Rm	write pattern to LCD
36 MOV HI, d8	move data to HIB
37 MOV PH, d5	move data to port halt interrupt release byte
38 MOV Rm, SR2	move ESR to register Rm
39 MOV Rm, SR1	"
40 MOV A, Rm	move data to Accumulator from Rm


**Instruction Set Summary** (Continued)

Syntax	Description
41 MOV Rm, A	move data from Accumulator to Rm
42 MOV Wn, Rm	move Rm to Accumulator and Wn
43 MOV CF, Rm	move data from Rm3 to Carry flag
44 MOV RM, d	move data to Accumulator from Rm
45 MOV Rm, Wn	"
46 MOV ALM, 00h	activate a sentence out of 256
47 MOV TM, d6	move data to timer and start
48 MOV Rm, CF	move data from Carry flag
49 MOV IC, d4	move data to interrupt control byte
50 NOP	no operation
51 OR A, Rm	move the OR result to Accumulator
52 OR Wn, d	"
53 ORS A, Rm	OR and store
54 ORS Wn, d	"
55 OUT PA, Rm	output from Rm and setting
56 OUT PB, Rm	"
57 OUT PP, Rm	output data to port P
58 OUTS Rm, d	output data to port P serially
59 RET	return from subroutine
60 SBC A, Rm	subtraction with Carry
61 SBC Wn, d	"
62 SBCS A, Rm	SBC and store
63 SBCS Wn, d	"
64 SETM d7	turn the #EB2 and set modes
65 SL0 Rm	shift register left and moving
66 SL1 Rm	"
67 SR0 Rm	shift register and moving
68 SR1 Rm	"
69 SUB A, Rm	subtraction
70 SUB Wn, d	"
71 SUBS A, Rm	SUB and store
72 SUBS Wn, d	"
73 XOR A, Rm	move the XOR result to Accumulator
74 XOR Wn, d	"
75 XORS A, Rm	XOR and store
76 XORS Wn, d	"


Note. Refer to Voice Smart Programmer's Guide (pid321) for details of each instruction.

**COB Information I**

Silk screen & copper print

COB model number : M9201
Chip bonded : U30x2**Legend**

- Copper pad for X'tal
- Copper pad for LCD
- Copper pad for LCD
- Copper pad
- Through hole
- Through hole
- Alignment hole for Jig

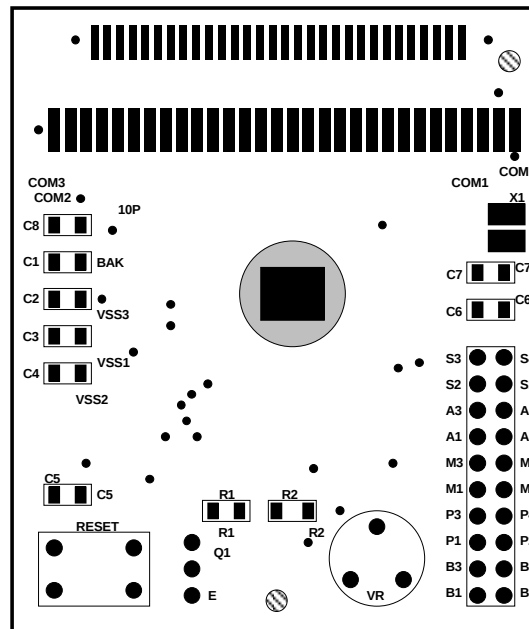



COB Information II


Signal Name & Location Description

COB model number : M9201

Chip bonded : either U30x2

Please refer previous page for legends

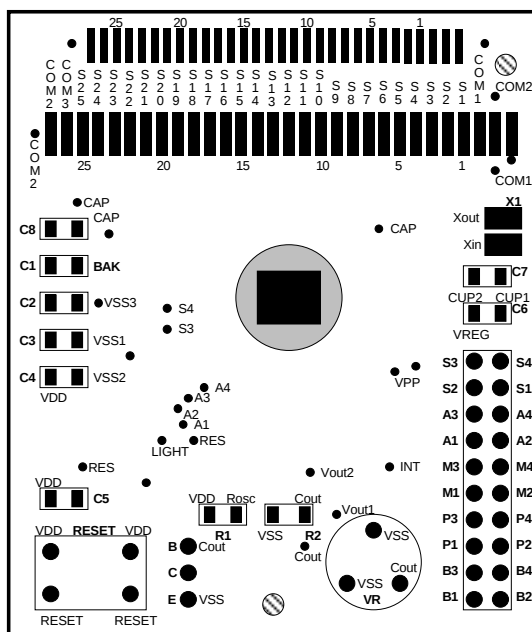



Timing Diagram


To be Available soon

Standard Code Line Up

To be Available soon



Typical Application Circuit

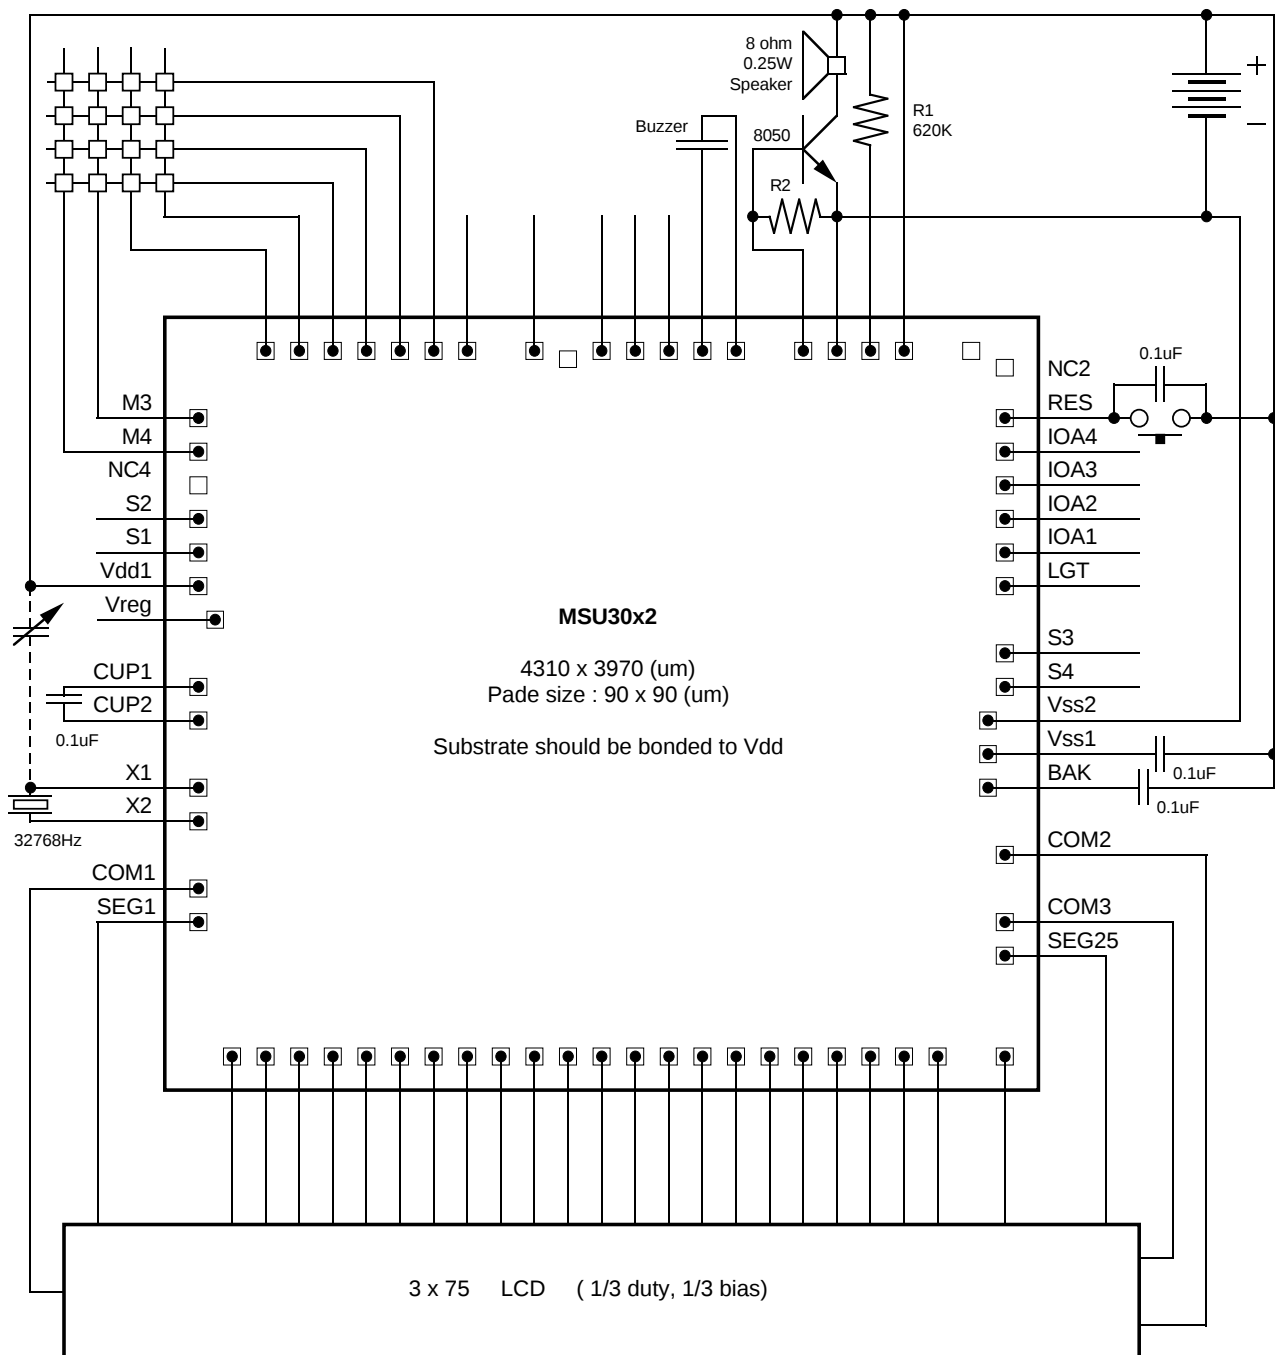

Note: All the above components need to adjust possibly case by case to meet required performance.

**Bonding Pad Information**

Pad No.	Designation	X	Y	Pad No.	Designation	X	Y
1	SEG2	-1775	-1827	36	IOA4	1985	1156
2	SEG3	-1618	-1827	37	RES	1986	1349
3	SEG4	-1450	-1827	38	NC2	1995	1657
4	SEG5	-1294	-1827	39	NC3	1905	1824
5	SEG6	-1126	-1827	40	Vdd2	1525	1827
6	SEG7	-970	-1827	41	ROSC	1300	1827
7	SEG8	-801	-1827	42	VssV	1080	1827
8	SEG9	-645	-1827	43	COUT	920	1827
9	SEG10	-477	-1827	44	VOUT1	625	1826
10	SEG11	-321	-1827	45	VOUT2	408	1826
11	SEG12	-153	-1827	46	IOB1	254	1826
12	SEG13	3	-1827	47	IOB2	87	1826
13	SEG14	171	-1827	48	IOB3	-58	1826
14	SEG15	327	-1827	49	NC1	-252	1783
15	SEG16	495	-1827	50	IOB4	-430	1826
16	SEG17	651	-1827	51	VBZ/INT	-654	1826
17	SEG18	820	-1827	52	P1	-821	1826
18	SEG19	976	-1827	53	P2	-967	1826
19	SEG20	1144	-1827	54	P3	-1132	1826
20	SEG21	1300	-1827	55	P4	-1277	1826
21	SEG22	1468	-1827	56	M1	-1458	1827
22	SEG23	1625	-1827	57	M2	-1685	1827
23	SEG24	1995	-1757	58	M3	-1995	1627
24	SEG25	1995	-1127	59	M4	-1995	1401
25	COM3	1995	-943	60	NC4	-1995	1191
26	COM2	1995	-707	61	S2	-1995	1015
27	BAK	1908	-416	62	S1	-1995	789
28	Vss1	1908	-275	63	Vdd1	-1995	629
29	Vss2	1932	-129	64	VREG	-1962	467
30	S4	1986	31	65	CUP1	-1994	56
31	S3	1986	257	66	CUP2	-1994	-158
32	LGT	1985	519	67	X1	-1995	-464
33	IOA1	1985	700	68	X2	-1995	-633
34	IOA2	1985	846	69	COM1	-1995	-955
35	IOA3	1985	1011	70	SEG1	-1995	-1138

Taiwan

#1, Creation Road I,
Science-based Indus. Park,
Hsinchu, 30077
Taiwan, ROC
"audio_reply@mosel.com.tw"
TEL: 886-3-578-3344
FAX: 886-3-579-2955
FAX: 886-3-578-4732

Taipei

7F, #102, Section 3,
Ming Chung E. Road,
Taipei, 105
Taiwan, ROC
TEL: 886-2-2545-1213
FAX: 886-2-2545-1214
Mdm: 886-2-2545-1464

China

(Vitellic HKG ShenZhen)
Room#1315, Shenkan Bldg.
#4, Shangbu central road,
ShenZhen city, 518028,
P.R.China
TEL: 86-755-322-9805
FAX: 86-755-322-9806
Mdm: 86-755-332-3995

Hongkong

#19, Dai Fu Street,
Taipo Industrial Estate,
Taipo, N.T.
Hongkong
TEL: 852-2665-4883
FAX: 852-2664-2406
FAX: 852-2770-8011
Mdm: 852-2388-0244

U.S.A.

#3910,
North First Street,
San Jose,
CA. 95134-1501
U.S.A.
TEL: 1-408-433-6000
FAX: 1-408-433-0952

Japan

WBG Marive West 25F,
#6, Nakase 2-chome,
Mihama-ku, Chiba-shi,
Chiba 261-7125,
Japan
TEL: 81-43-299-6000
FAX: 81-43-299-6555

<http://www.moselvitelic.com>



T O : Mosel Vitelic Inc. 886-3-5772788 (fax)
Attention : Sales & Marketing Department

MSU3042

3 digit production code
filled by MVI only

Product Request Form

We hereby request MVI to start preparing produce MSU3042 which is specified as below descriptions titled as well as form A and form(s) B and form(s) C.

I already read this data sheet pid 262* and understand MSU3042 completely and know how to specify to fit my requirement. The voice length limit is B0000h.

General Descriptions		Chip Descriptions	
Customer	 No proceeding if empty	Title	
Agent		SampleRate	☐ 8KHz by 32768 Hz X'tal ☐ Hz
Sales Represen.	 Who is MVI sales you contact ?		
Sound Providing to MVI	☐ 8-bit PCM sound files ☐ .WAV sound files ☐ DAT or equivalent ☐ Something special in written memo ☐ Others	Output Device	☐ Buzzer (F fr= 1K Hz) ☐ Speaker (8 ohm, 1" diam) ☐ Other
Code Providing to MVI	☐ .TRA program file, name = ☐ .EVA LCD file, name = ☐ .HEX program file, name = ☐ .HEX LCD file, name =	Working Voltage	☐ 2.5 V ☐ 3.0 V ☐ 3.5 V ☐ 5.0 V ☐ 4.0 V ☐ 5.5 V ☐ 4.5 V ☐ 6.0 V
Serviced Required from MVI	☐ EPROMs with data inside for M9018 ☐ files to pro'med into EPROM ☐ U73061 OTP chip ☐ Confirm table ☐ Others	Power Source	☐ Battery size "D" ☐ Battery size "AA" ☐ Battery size "AAA" ☐ Battery button cell ☐ Mains ☐ Other

Phone # : Fax # :
Company Name :
Signature : Date:
Name Typed :
Position Title :
Department, Section :

Hardcopy of cover page of U3032, U3022 PRF (product request form) are provided per request.



TITLE	
-------	--

Product Request Form A : Mask Definitions

Mask options		Selections		
1	Power bias	☒ Li - 1/2 Bias		
2	LCD driver & display frequency	☐ 1/2 duty 128 Hz	☐ 1/2 duty 64 Hz	☐ 1/2 duty 32 Hz
		☐ 1/3 duty 170.7 Hz	☐ 1/3 duty 85.3 Hz	☐ 1/3 duty 42.7 Hz
		☐ Static 128 Hz	☐ Static 64 Hz	☐ Static 32 Hz
3	S-port defined	☐ Open	☐ Hold transistor	
4	M-port defined	☐ Open	☐ Hold transistor	
5	Interrupt switch	☐ Pull down	☐ Pull up	
6	Interrupt edge	☐ Rising	☐ Falling	
7	Power-on mode	☒ BackUp	☐ Non-BackUp	
8	External Reset	☐ and PowerOn reset	☐ Only	
9	^{note} Chatter Removal time	☐ 8 mS time	☐ 2 mS time	
10	^{note} Set time	☐ Slower (Tk=512 mS)	☐ Faster (Tk=8000uS)	
11	Oscillator	☒ Crystal		
12	System Clock	☐ Fast (Fosc)	☐ Slow (Fosc/2)	
13	Alarm frequency	☒ Level shift		
14	P-port	☒ Level shift		
15	^{note} Input port signal	☒ Level shift		
16	Light mode	☒ Always		
17	Reset level	☒ High		
18	I/O port	☒ Level shift		
19	Light	☒ Level shift		

Note 9 : For S port and M port

Note 10 : Set time = (set value + 1) * Tk / Fosc ; Fosc is in KHz

Note 15 : Input port control signal level shift, J48, J49

☐ How many words are defined ? (1 ≤ ≤ 256)And Forms are attached: ☐ B1 ☐ B2 ☐ B3 ☐ B4☐ How many sentences are defined ? (1 ≤ ≤ 256)And Forms are attached: ☐ C1 ☐ C2 ☐ C3 ☐ C4 ☐ C5 ☐ C6 ☐ C7 ☐ C8



Product Request Form B1 : Voice Word Definitions

TITLE

Address	Voice Description	VoiceLength	MuteLength	WordTotal ≤ 100000h	There are	1≤	≤64	words defined on this form.
00		S	00h	S	00h	S	00h	00h
01		S	00h	S	00h	S	00h	00h
02		S	00h	S	00h	S	00h	00h
03		S	00h	S	00h	S	00h	00h
04		S	00h	S	00h	S	00h	00h
05		S	00h	S	00h	S	00h	00h
06		S	00h	S	00h	S	00h	00h
07		S	00h	S	00h	S	00h	00h
08		S	00h	S	00h	S	00h	00h
09		S	00h	S	00h	S	00h	00h
10		S	00h	S	00h	S	00h	00h
11		S	00h	S	00h	S	00h	00h
12		S	00h	S	00h	S	00h	00h
13		S	00h	S	00h	S	00h	00h
14		S	00h	S	00h	S	00h	00h
15		S	00h	S	00h	S	00h	00h
16		S	00h	S	00h	S	00h	00h
17		S	00h	S	00h	S	00h	00h
18		S	00h	S	00h	S	00h	00h
19		S	00h	S	00h	S	00h	00h
20		S	00h	S	00h	S	00h	00h
21		S	00h	S	00h	S	00h	00h
22		S	00h	S	00h	S	00h	00h
23		S	00h	S	00h	S	00h	00h
24		S	00h	S	00h	S	00h	00h
25		S	00h	S	00h	S	00h	00h
26		S	00h	S	00h	S	00h	00h
27		S	00h	S	00h	S	00h	00h
28		S	00h	S	00h	S	00h	00h
29		S	00h	S	00h	S	00h	00h
30		S	00h	S	00h	S	00h	00h
31		S	00h	S	00h	S	00h	00h
32		S	00h	S	00h	S	00h	00h
33		S	00h	S	00h	S	00h	00h
34		S	00h	S	00h	S	00h	00h
35		S	00h	S	00h	S	00h	00h
36		S	00h	S	00h	S	00h	00h
37		S	00h	S	00h	S	00h	00h
38		S	00h	S	00h	S	00h	00h
39		S	00h	S	00h	S	00h	00h
40		S	00h	S	00h	S	00h	00h
41		S	00h	S	00h	S	00h	00h
42		S	00h	S	00h	S	00h	00h
43		S	00h	S	00h	S	00h	00h
44		S	00h	S	00h	S	00h	00h
45		S	00h	S	00h	S	00h	00h
46		S	00h	S	00h	S	00h	00h
47		S	00h	S	00h	S	00h	00h
48		S	00h	S	00h	S	00h	00h
49		S	00h	S	00h	S	00h	00h
50		S	00h	S	00h	S	00h	00h
51		S	00h	S	00h	S	00h	00h
52		S	00h	S	00h	S	00h	00h
53		S	00h	S	00h	S	00h	00h
54		S	00h	S	00h	S	00h	00h
55		S	00h	S	00h	S	00h	00h
56		S	00h	S	00h	S	00h	00h
57		S	00h	S	00h	S	00h	00h
58		S	00h	S	00h	S	00h	00h
59		S	00h	S	00h	S	00h	00h
60		S	00h	S	00h	S	00h	00h
61		S	00h	S	00h	S	00h	00h
62		S	00h	S	00h	S	00h	00h
63		S	00h	S	00h	S	00h	00h

Length summation of above 64 words is

00h

Signature & date

MVI Sales & date

All words' length sum'n is

≤ limit

00h

Harcopy of complete set PRF (product request form) pages B2-B4 and C1 - C8 are provided per request.