


PWA_CS-2W & PWB_CS-2W Series

2W, ULTRAWIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT, DC/DC CONVERTER



multi-country patent protection **RoHS**

FEATURES

High Efficiency up to 82%
I/O Isolation 1500VDC
4:1 wide input range
Short circuit protection(automatic recovery)
Operating Temperature: -40°C to +85°C
Remote ON/OFF control
Internal SMD construction
Low Ripple and Noise
UL94-V0 package
RoHS Compliance

APPLICATIONS

The PWA_CS-2W & PWB_CS-2W Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage ranges $\leq 4:1$);
- 2) Where isolation is necessary between input and output(isolation ≤ 1500 VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

PRODUCT PROGRAM

Part Number	Input			Output			Efficiency (% ,Typ)
	Voltage (VDC)			Voltage (VDC)	Current (mA)		
	Nominal	Range	Max*		Max	Min	
PWA2405CS-2W	24	9-36	40	±5	±200	±20	76
PWA2409CS-2W				±9	±111	±11	78
PWA2412CS-2W				±12	±83	±8	80
PWA2415CS-2W				±15	±67	±7	79
PWB2403CS-1W6				3.3	500	50	70
PWB2405CS-2W				5	400	40	76
PWB2409CS-2W				9	222	22	78
PWB2412CS-2W				12	167	16	80
PWB2415CS-2W				15	133	13	79
PWA4805CS-2W	48	18-72	80	±5	±200	±20	76
PWA4809CS-2W				±9	±111	±11	78
PWA4812CS-2W				±12	±83	±8	81
PWA4815CS-2W				±15	±67	±7	80
PWB4803CS-1W6				3.3	500	50	72
PWB4805CS-2W				5	400	40	76
PWB4809CS-2W				9	222	22	78
PWB4812CS-2W				12	167	16	81
PWB4815CS-2W				15	133	13	80

* Input voltage over it may cause permanent damage to the device.

Note: The load shouldn't be less than 10%, otherwise ripple will increase dramatically.


Operation under 10% load will not damage the converter; However, they may not meet all specification listed.

ISOLATION SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1 mA max	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation Capacitance	Input/Output		80		PF

MODEL SELECTION

PWA2405CS-2W



OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Output power	See Below Products Program	0.2		2	W
Positive voltage accuracy	Refer To Recommended Circuit		± 1	± 3	%
Negative voltage accuracy	Refer To Recommended Circuit		± 3	± 5	
Load regulation	From 10% To 100% Load		± 0.5	$\pm 1.5^*$	
Line regulation	Input Voltage From Low To High		± 0.2	± 0.75	
Temperature drift	Refer To Recommended Circuit			± 0.03	%/°C
Ripple & Noise**	20MHz Bandwidth		50	100	mVp-p
Switching frequency	100% Load, Nominal Input Voltage		300		KHz

*Dual output models unbalanced load: $\pm 5\%$.

**Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:

1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.

MORNSUN Science & Technology co., Ltd.

Address: 2th floor 6th building, Hangzhou

Industrial District, Guangzhou, China

Tel: 86-20-38601850


Fax: 86-20-38601272

<http://www.mornsun-power.com>


COMMON SPECIFICATION

Item	Test Conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15		
Lead temperature	1.5mm from case for 10 seconds			300	
Cooling		Free air convection			
Short circuit protection		Continuous ,Automatic Recovery			
Case material		Plastic(UL94-V0)			
MTBF		1000			K hours
Weight			5.8		g

TYPICAL TEMPERATURE CURVE

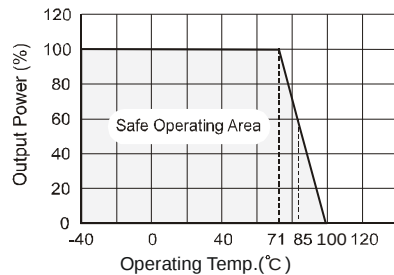

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

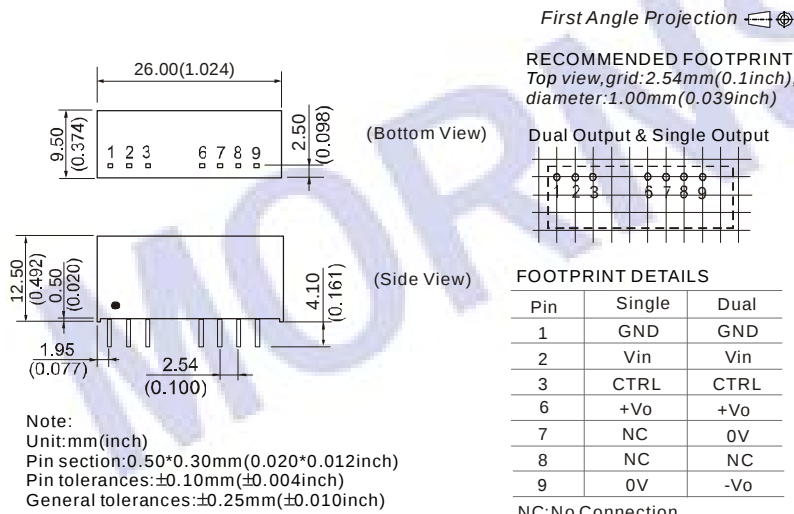

APPLICATION NOTE

Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load, and that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.


TRL Terminal

When open or high impedance, the converter work well; When this pin is 'high'; the converter shutdown; It should be note that the input current should between 5-10mA,exceeding the maximum 20mA will cause permanence damage to the converter. The value of R can be derived as follows:

$$R = \frac{V_C - V_D - 1.0}{I_C}$$

Recommended Circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

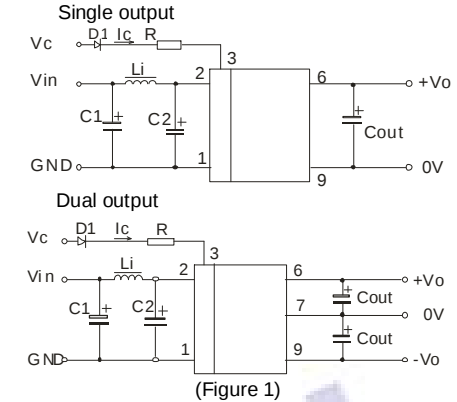

However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1). General:

Cin:10-100uF

Cout:100uF


Lin:4.7-120uH

Output External Capacitor Table(Table 1)

Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cou (uF)
3.3	2200	±5	680
5	1000	±9	470
9	680	±12	330
12	470	±15	220
15	220	-	-

Input current

Nominal input voltage range. The input current of the power supply must be sufficient to the startup current (Ip) of the DC/DC module (Figure 2).General: $I_p \leq 1.4 \cdot I_{in-max}$



No parallel connection or plug and play.