

# ***Rockchip PX3 SE Datasheet***

**Revision 1.1  
Dec. 2017**

**Revision History**

| <b>Date</b> | <b>Revision</b> | <b>Description</b>          |
|-------------|-----------------|-----------------------------|
| 2017-12-18  | 1.2             | Update the LVDS information |
| 2017-7-19   | 1.1             | Update to be PX3 SE         |
| 2017-2-15   | 1.0             | Initial                     |

## Table of Content

|                                                                    |    |
|--------------------------------------------------------------------|----|
| Table of Content .....                                             | 3  |
| Figure Index .....                                                 | 5  |
| Table Index.....                                                   | 6  |
| Warranty Disclaimer.....                                           | 7  |
| Chapter 1 Introduction .....                                       | 8  |
| 1.1 Features.....                                                  | 8  |
| 1.1.1 Microprocessor .....                                         | 8  |
| 1.1.2 Memory Organization .....                                    | 8  |
| 1.1.3 Internal Memory.....                                         | 8  |
| 1.1.4 External Memory or Storage device .....                      | 8  |
| 1.1.5 System Component .....                                       | 9  |
| 1.1.6 Video CODEC .....                                            | 11 |
| 1.1.7 JPEG CODEC .....                                             | 12 |
| 1.1.8 Image Enhancement (IEP module) .....                         | 12 |
| 1.1.9 Graphics Engine .....                                        | 13 |
| 1.1.10 Video IN/OUT .....                                          | 13 |
| 1.1.11 HDMI .....                                                  | 15 |
| 1.1.12 Audio Interface.....                                        | 15 |
| 1.1.13 Connectivity.....                                           | 16 |
| 1.1.14 Others .....                                                | 18 |
| 1.2 Block Diagram .....                                            | 18 |
| Chapter 2 Package information .....                                | 20 |
| 2.1 HiOrdering information.....                                    | 20 |
| 2.2 Top Marking.....                                               | 20 |
| 2.3 TFBGA316 Dimension .....                                       | 20 |
| 2.4 TFBGA316 Ball Map .....                                        | 23 |
| 2.5 Pin Description.....                                           | 25 |
| 2.5.1 PX3 SE power/ground IO descriptions.....                     | 25 |
| 2.5.2 PX3 SE function IO descriptions.....                         | 26 |
| 2.5.3 IO pin name descriptions .....                               | 35 |
| 2.5.4 PX3 SE IO Type .....                                         | 39 |
| Chapter 3 Electrical Specification .....                           | 41 |
| 3.1 Absolute Maximum Ratings.....                                  | 41 |
| 3.2 Recommended Operating Conditions.....                          | 41 |
| 3.3 DC Characteristics .....                                       | 42 |
| 3.4 Recommended Operating Frequency .....                          | 43 |
| 3.5 Electrical Characteristics for General IO.....                 | 44 |
| 3.6 Electrical Characteristics for PLL .....                       | 44 |
| 3.7 Electrical Characteristics for SAR-ADC .....                   | 45 |
| 3.8 Electrical Characteristics for USB OTG/Host2.0 Interface ..... | 45 |
| 3.9 Electrical Characteristics for HDMI .....                      | 46 |
| 3.10 Electrical Characteristics for DDR IO .....                   | 46 |
| 3.11 Electrical Characteristics for eFuse .....                    | 47 |
| 3.12 Electrical Characteristics for TV Encoder .....               | 47 |

|                                                                 |    |
|-----------------------------------------------------------------|----|
| Chapter 4 Hardware Guideline .....                              | 49 |
| 4.1 Reference design for PX3 SE oscillator PCB connection ..... | 49 |
| 4.2 Reference design for PLL PCB connection.....                | 49 |
| 4.3 Reference design for USB OTG/Host2.0 connection .....       | 49 |
| 4.4 Reference design for HDMI Tx PHY connection .....           | 51 |
| 4.5 Reference design for Audio Codec connection.....            | 52 |
| 4.6 PX3 SE Power on reset descriptions .....                    | 53 |
| Chapter 5 Thermal Management .....                              | 54 |
| 5.1 Overview.....                                               | 54 |
| 5.2 Package Thermal Characteristics .....                       | 54 |

## Figure Index

|                                                                    |    |
|--------------------------------------------------------------------|----|
| Fig.1-1 PX3 SE Block Diagram .....                                 | 19 |
| Fig.2-1 PX3 SE TFBGA316 Package Top View .....                     | 20 |
| Fig.2-2 PX3 SE TFBGA316 Package Side View .....                    | 21 |
| Fig.2-3 PX3 SE TFBGA316 Package Bottom View .....                  | 21 |
| Fig.2-4 PX3 SE TFBGA316 Package Dimension .....                    | 22 |
| Fig.2-5 TFBGA316 Ball Map .....                                    | 24 |
| Fig.4-1 External Reference Circuit for 24MHzOscillators .....      | 49 |
| Fig.4-2 PX3 SE USB OTG/Host2.0 differential lines requirement..... | 50 |
| Fig.4-3 PX3 SE USB OTG/Host2.0 ground plane guide. ....            | 50 |
| Fig.4-4 PX3 SE USB OTG/Host2.0 component placement. ....           | 51 |
| Fig.4-5 PX3 SE HDMI interface reference connection.....            | 51 |
| Fig.4-6 PX3 SE HDMI CEC interface reference connection .....       | 52 |
| Fig.4-7 PX3 SE HDMI ESD interface reference connection .....       | 52 |
| Fig.4-8 PX3 SE Audio Codec interface reference connection .....    | 52 |
| Fig.4-9 PX3 SE reset signals sequence .....                        | 53 |

## Table Index

|                                                                                 |    |
|---------------------------------------------------------------------------------|----|
| Table 2-1 PX3 SE Power/Ground IO information .....                              | 25 |
| Table 2-2 PX3 SE IO descriptions .....                                          | 26 |
| Table 2-3 PX3 SE IO function description list.....                              | 35 |
| Table 2-4 PX3 SE IO Type List.....                                              | 39 |
| Table 3-1 PX3 SE absolute maximum ratings .....                                 | 41 |
| Table 3-2 PX3 SE recommended operating conditions.....                          | 41 |
| Table 3-3 PX3 SE DC Characteristics.....                                        | 42 |
| Table 3-4 Recommended operating frequency for PLL and oscillator domain .....   | 43 |
| Table 3-5 PX3 SE Electrical Characteristics for Digital General IO .....        | 44 |
| Table 3-6 PX3 SE Electrical Characteristics for PLL .....                       | 44 |
| Table 3-7 PX3 SE Electrical Characteristics for SAR-ADC .....                   | 45 |
| Table 3-8 PX3 SE Electrical Characteristics for USB OTG/Host2.0 Interface ..... | 45 |
| Table 3-9 PX3 SE Electrical Characteristics for HDMI .....                      | 46 |
| Table 3-10 PX3 SE Electrical Characteristics for DDR IO.....                    | 46 |
| Table 3-11 PX3 SE Electrical Characteristics for eFuse .....                    | 47 |
| Table 3-12 PX3 SE Electrical Characteristics for TV Encoder .....               | 47 |
| Table 5-1 PX3 SE Thermal Resistance Characteristics .....                       | 54 |

## Warranty Disclaimer

Rockchip Electronics Co.,Ltd makes no warranty, representation or guarantee (expressed, implied, statutory, or otherwise) by or with respect to anything in this document, and shall not be liable for any implied warranties of non-infringement, merchantability or fitness for a particular purpose or for any indirect, special or consequential damages.

Information furnished is believed to be accurate and reliable. However, Rockchip Electronics Co.,Ltd assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use.

Rockchip Electronics Co.,Ltd's products are not designed, intended, or authorized for using as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Rockchip Electronics Co.,Ltd's product could create a situation where personal injury or death may occur, should buyer purchase or use Rockchip Electronics Co.,Ltd's products for any such unintended or unauthorized application, buyers shall indemnify and hold Rockchip Electronics Co.,Ltd and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, expenses, and reasonable attorney fees arising out of, either directly or indirectly, any claim of personal injury or death that may be associated with such unintended or unauthorized use, even if such claim alleges that Rockchip Electronics Co.,Ltd was negligent regarding the design or manufacture of the part.

## Copyright and Patent Right

Information in this document is provided solely to enable system and software implementers to use Rockchip Electronics Co.,Ltd's products. There are no expressed or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

**Rockchip Electronics Co.,Ltd does not convey any license under its patent rights nor the rights of others.**

**All copyright and patent rights referenced in this document belong to their respective owners and shall be subject to corresponding copyright and patent licensing requirements.**

## Trademarks

Rockchip and Rockchip™ logo and the name of Rockchip Electronics Co.,Ltd's products are trademarks of Rockchip Electronics Co.,Ltd. and are exclusively owned by Rockchip Electronics Co.,Ltd. References to other companies and their products use trademarks owned by the respective companies and are for reference purpose only.

## Confidentiality

The information contained herein (including any attachments) is confidential. The recipient hereby acknowledges the confidentiality of this document, and except for the specific purpose, this document shall not be disclosed to any third party.

## Reverse engineering or disassembly is prohibited.

**ROCKCHIP ELECTRONICS CO.,LTD. RESERVES THE RIGHT TO MAKE CHANGES IN ITS PRODUCTS OR PRODUCT SPECIFICATIONS WITH THE INTENT TO IMPROVE FUNCTION OR DESIGN AT ANY TIME AND WITHOUT NOTICE AND IS NOT REQUIRED TO UNDATE THIS DOCUMENTATION TO REFLECT SUCH CHANGES.**

## Copyright © 2017 Rockchip Electronics Co., Ltd.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electric or mechanical, by photocopying, recording, or otherwise, without the prior written consent of Rockchip Electronics Co.,Ltd.

## Chapter 1 Introduction

PX3 SE is a high performance Quad-core application processor. Especially it is a high-integration and cost efficient SOC for 1080P H.265.

Quad-core Cortex-A7 is integrates with separately Neon and FPU coprocessor, also shared 256KB L2 Cache. Mali400 MP2 GPU is embedded to support up to WXGA 1280x800 panel display.

Lots of high-performance interface to get very flexible solution, such as multi-pipe display with HDMI1.4, TV Encoder. Crypto hardware is integrated for support security BOOT. 32bits DDR3/LPDDR2 provides high memory bandwidths for high-performance.

HEVC hardware is integrated for support 1080P H.265 video.

### 1.1 Features

The features listed below which may or may not be present in actual product, may be subject to the third party licensing requirements. Please contact Rockchip for actual product feature configurations and licensing requirements.

#### 1.1.2 Microprocessor

- Quad-core ARM Cortex-A7MP Core processor, a high-performance, low-power and cached application processor
- Full implementation of the ARM architecture v7-A instruction set, ARM Neon Advanced SIMD (single instruction, multiple data) support for accelerated media and signal processing computation
- Separately Integrated Neon and FPU per CPU
- 32KB/32KB L1 I-Cache/D-Cache per CPU.
- Unified 256KB L2 Cache.

#### 1.1.3 Memory Organization

- Internal on-chip memory
  - BootRom
  - Internal SRAM
- External off-chip memory<sup>①</sup>
  - DDR3/DDR3L/LPDDR2
  - Async/Toggle/SyncNand Flash(include LBA Nand)

#### 1.1.4 Internal Memory

- Internal BootRom
  - Size : 16KB
  - Support system boot from the following device :
    - ◆ 8bits Async Nand Flash
    - ◆ 8bits toggle Nand Flash
    - ◆ SPI interface
    - ◆ eMMC interface
    - ◆ SDMMC interface
  - Support system code download by the following interface:
    - ◆ USB OTG interface
- Internal SRAM
  - Size : 8KB

#### 1.1.5 External Memory or Storage device

- Dynamic Memory Interface (DDR3/DDR3L/LPDDR2)
  - Compatible with JEDEC standard DDR3-1066/DDR3L-1066/LPDDR2-800 SDRAM

- Supports 32 Bits data width, 2 ranks (chip selects), totally 2GB (max) address space.
- 7 host ports with 64bits/128bits AXI bus interface for system access, AXI bus clock is asynchronous with DDR clock
- Programmable timing parameters to support DDR3/DDR3L/LPDDR2 SDRAM from various vendor
- Advanced command reordering and scheduling to maximize bus utilization
- Low power modes, such as power-down and self-refresh for DDR3/LPDDR2 SDRAM; clock stop and deep power-down for LPDDR2 SDRAM
- Compensation for board delays and variable latencies through programmable pipelines
- Programmable output and ODT impedance with dynamic PVT compensation
- Nand Flash Interface
  - Support 8bits async/toggle/syncnandflash, up to 4 banks
  - Support LBA nandflash
  - 16bits, 24bits, 40bits, 60bits hardware ECC
  - For DDR nandflash, support DLL bypass and 1/4 or 1/8 clock adjust
  - For async/togglenandflash, support configurable interface timing, maximum data rate is 16bit/cycle
  - Embedded AHB master interface to do data transfer by DMA method
  - Also support data transfer by AHB slave interface together with external DMAC
- eMMC Interface
  - Compatible with standard iNAND interface
  - Support MMC4.5 protocol
  - Provide eMMC boot sequence to receive boot data from external eMMC device
  - Support FIFO over-run and under-run prevention by stopping card clock automatically
  - Support CRC generation and error detection
  - Embedded clock frequency division control to provide programmable baud rate
  - Support block size from 1 to 65535Bytes
  - 8bits data bus width
- SD/MMC Interface
  - Compatible with SD2.0, MMC ver 4.5
  - Support FIFO over-run and under-run prevention by stopping card clock automatically
  - Support CRC generation and error detection
  - Embedded clock frequency division control to provide programmable baud rate
  - Support block size from 1 to 65535Bytes
  - Data bus width is 4bits

### **1.1.6 System Component**

- CRU (clock & reset unit)
  - Support clock gating control for individual components inside PX3 SE
  - One oscillator with 24MHz clock input and 4 embedded PLLs
  - Support global soft-reset control for whole SOC, also individual soft-reset for every components
- PMU(power management unit)
  - Multiple configurable work modes to save power by different frequency or automatically clock gating control or power domain on/off control
  - Lots of wakeup sources in different mode
  - 2 separate voltage domains
  - 3 separate power domains, which can be power up/down by software based on

different application scenes

- Timer
  - 6 on-chip 64bits Timers in SoC with interrupt-based operation
  - Provide two operation modes: free-running and user-defined count
  - Support timer work state checkable
  - Fixed 24MHz clock input
- PWM
  - Four on-chip PWMs with interrupt-based operation
  - Programmable pre-scaled operation to bus clock and then further scaled
  - Embedded 32-bit timer/counter facility
  - Support capture mode
  - Support continuous mode or one-shot mode
  - Provides reference mode and output various duty-cycle waveform
- WatchDog
  - 32 bits watchdog counter width
  - Counter clock is from apb bus clock
  - Counter counts down from a preset value to 0 to indicate the occurrence of a timeout
  - WDT can perform two types of operations when timeout occurs:
    - ◆ Generate a system reset
    - ◆ First generate an interrupt and if this is not cleared by the service routine by the time a second timeout occurs then generate a system reset
  - Programmable reset pulse length
  - Totally 16 defined-ranges of main timeout period
- Bus Architecture
  - 128bit/64-bit/32-bit multi-layer AXI/AHB/APB composite bus architecture
  - 5 embedded AXI interconnect
    - ◆ CPU interconnect with four 64-bits AXI masters, one 64-bits AXI slaves, one 32-bits AHB master and lots of 32-bits AHB/APB slaves
    - ◆ PERI interconnect with two 64-bits AXI masters, one 64-bits AXI slave, five 32-bits AHB masters and lots of 32-bits AHB/APB slaves
    - ◆ Display interconnect with three 128-bits AXI master, four 64-bits AXI masters and one 32-bits AHB slave
    - ◆ GPU interconnect with one 128-bits AXI master with point-to-point AXI-lite architecture and 32-bits APB slave
    - ◆ VCODEC interconnect also with two 64-bits AXI master and two 32-bits AHB slave, they are point-to-point AXI-lite architecture
  - Flexible different QoS solution to improve the utility of bus bandwidth
- Interrupt Controller
  - Support 3 PPI interrupt source and 74 SPI interrupt sources input from different components inside PX3 SE
  - Support 16 software-triggered interrupts
  - Input interrupt level is fixed , only high-level sensitive
  - Two interrupt outputs (nFIQ and nIRQ)separatelyfor each Cortex-A7, both are low-level sensitive
  - Support different interrupt priority for each interrupt source, and they are always software-programmable
- DMAC
  - Micro-code programming based DMA
  - The specific instruction set provides flexibility for programming DMA transfers
  - Linked list DMA function is supported to complete scatter-gather transfer

- Support internal instruction cache
- Embedded DMA manager thread
- Support data transfer types with memory-to-memory, memory-to-peripheral, peripheral-to-memory
- Signals the occurrence of various DMA events using the interrupt output signals
- Mapping relationship between each channel and different interrupt outputs is software-programmable
- One embedded DMA controller PERI\_DMAM for peripheral system
- PERI\_DMAM features:
  - ◆ 8 channels totally
  - ◆ 16 hardware request from peripherals
  - ◆ 2 interrupt output
  - ◆ Not support trustzone technology
- Security system
  - Embedded encryption and decryption engine
    - ◆ Support AES 128/192/256 bits key mode, ECB/CBC/CTR chain mode, Slave/FIFO mode
    - ◆ Support DES/3DES (ECB and CBC chain mode) , 3DES (EDE/ EEE key mode), Slave/FIFO mode
    - ◆ Support SHA1/SHA256/MD5 (with hardware padding) HASH function, FIFO mode only
    - ◆ Support 160 bit Pseudo Random Number Generator (PRNG)
    - ◆ Support PKA 512/1024/2048 bit Exp Modulator

### 1.1.7 Video CODEC

- Shared internal memory and bus interface for video decoder and encoder<sup>®</sup>
- Embedded memory management unit(MMU)
- Video Decoder
  - Real-time video decoder of MPEG-1, MPEG-2, MPEG-4,H.263, H.264, H.265,VC-1, VP8, MVC
  - MMU Embedded
  - Supports frame timeout interrupt , frame finish interrupt and bitstream error interrupt
  - Error detection and concealment support for all video formats
  - Output data format is YUV420 semi-planar, and YUV400(monochrome) is also supported for H.264
  - H.265 up to MP Level 4.1 High Tier : 1080P@60fps
  - H.264 up to HP level 4.2 : 1080p@60fps
  - MPEG-4 up to ASP level 5 : 1080p@60fps
  - MPEG-2 up to MP : 1080p@60fps
  - MPEG-1 up to MP : 1080p@60fps
  - H.263 : 576p@60fps
  - VC-1 up to AP level 3 : 1080p@30fps
  - VP8 : 1080p@60fps
  - MVC : 1080p@60fps
  - For H.264, image cropping not supported
  - For MPEG-4,GMC(global motion compensation)not supported
  - For VC-1, upscaling and range mapping are supported in image post-processor
  - For MPEG-4 SP/H.263, using a modified H.264 in-loop filter to implement deblocking filter in post-processor unit
- Video Encoder
  - Support video encoder for H.264 UP to HP@level4.1, MVC and VP8
  - Only support I and P slices, not B slices
  - Support error resilience based on constrained intra prediction and slices

- Input data format:
  - ◆ YCbCr 4:2:0 planar
  - ◆ YCbCr 4:2:0 semi-planar
  - ◆ YCbYCr 4:2:2
  - ◆ CbYCrY 4:2:2 interleaved
  - ◆ RGB444 and BGR444
  - ◆ RGB555 and BGR555
  - ◆ RGB565 and BGR565
  - ◆ RGB888 and BRG888
  - ◆ RGB101010 and BRG101010
- Image size is from 96x96 to 1920x1088(Full HD)
- Maximum frame rate is up to 1920x1080 @ 30FPS®

### 1.1.8 JPEG CODEC

- JPEG decoder
  - Input JPEG file : YCbCr 4:0:0, 4:2:0, 4:2:2, 4:4:0, 4:1:1 and 4:4:4 sampling formats
  - Output raw image : YCbCr 4:0:0, 4:2:0, 4:2:2, 4:4:0, 4:1:1 and 4:4:4 semi-planar
  - Decoder size is from 48x48 to 8176x8176(66.8Mpixels)
  - Support JPEG ROI(region of image) decode
  - Maximum data rate® is up to 76million pixels per second
  - Embedded memory management unit(MMU)
- JPEG encoder
  - Input raw image :
    - ◆ YCbCr 4:2:0 planar
    - ◆ YCbCr 4:2:0 semi-planar
    - ◆ YCbYCr 4:2:2
    - ◆ CbYCrY 4:2:2 interleaved
    - ◆ RGB444 and BGR444
    - ◆ RGB555 and BGR555
    - ◆ RGB565 and BGR565
    - ◆ RGB888 and BRG888
    - ◆ RGB101010 and BRG101010
  - Output JPEG file : JFIF file format 1.02 or Non-progressive JPEG
  - Encoder image size up to 8192x8192(64million pixels) from 96x32
  - Maximum data rate® up to 90million pixels per second
  - Embedded memory management unit(MMU)

### 1.1.9 Image Enhancement (IEP module)

- Image format support
  - Input data: XRGB/RGB565/YUV420/YUV422
  - Output data: ARGB/RGB565/YUV420/YUV422
  - ARGB/XRGB/RGB565/YUV swap
  - UV SP/P
  - BT601\_l/BT601\_f/BT709\_l/BT709\_f color space conversion
  - RGB dither up/down
  - YUV up/down sampling
  - Max source image resolution: 8192x8192
  - Max scaled image resolution: 4096x4096
- YUV enhancement
  - Hue, Saturation, Brightness, Contrast adjustment
- RGB enhancement & denoise
  - Contrast enhancement

- Color enhancement
- Gamma adjustment
- High quality scale
  - Averaging filter down-scaling
  - Bi-cubic up-scaling
  - Arbitrary non-integer horizontal & vertical scaling ratio range from 1/16 to 16
- De-interlace
  - 3x5 Y motion detection matrix
  - Source width up to 1920
  - Configured high frequency de-interlace
  - I4O2 (Input 4 field, output 2 frame) /I4O1B/I4O1T/I2O1B/I2O1T mode
- Interface
  - Configured direct path to LCDC if source width no more than 1920
  - 32bit AHB bus slave
  - 64bit AXI bus master
  - Combined interrupt output

### **1.1.10 Graphics Engine**

- 3D Graphics Engine :
  - High performance OpenGL ES1.1 and 2.0, OpenVG1.1 etc.
  - Embedded 4 shader cores with shared hierarchical tiler
  - Separate vertex(geometry) and fragment(pixel) processing for maximum parallel throughput
  - Provide MMU and L2 Cache with 32KB size
- 2D Graphics Engine(RGA module) :
  - Bit Blit with Strength Blit, Simple Blit and Filter Blit
  - Color fill with gradient fill, and pattern fill
  - Line drawing with anti-aliasing and specified width
  - High-performance stretch and shrink
  - Monochrome expansion for text rendering
  - ROP2, ROP3, ROP4 full alpha blending and transparency
  - Alpha blending modes including Java 2 Porter-Duff compositing blending rules , chroma key, and pattern mask
  - 8K x 8K raster 2D coordinate system
  - Arbitrary degrees rotation with anti-aliasing on every 2D primitive
  - Programmable bicubic filter to support image scaling
  - Blending, scaling and rotation are supported in one pass for stretch blit
  - Source formats :
    - ◆ ABGR8888, XBGR888, ARGB8888, XRGB888
    - ◆ RGB888, RGB565
    - ◆ RGBA5551, RGBA4444
    - ◆ YUV420 planar, YUV420 semi-planar
    - ◆ YUV422 planar, YUV422 semi-planar
    - ◆ BPP8, BPP4, BPP2, BPP1
  - Destination formats :
    - ◆ ABGR8888, XBGR888, ARGB8888, XRGB888
    - ◆ RGB888, RGB565
    - ◆ RGBA5551, RGBA4444
    - ◆ YUV420 planar, YUV420 semi-planar only in filter and pre-scale mode
    - ◆ YUV422 planar, YUV422 semi-planar only in filter and pre-scale mode

### **1.1.11 Video IN/OUT**

- Camera Interface
  - Support up to 5M pixels

- 8bits CCIR656(PAL/NTSC) interface
- 8bits raw data interface
- YUV422 data input format with adjustable YUV sequence
- YUV422,YUV420 output format with separately Y and UV space
- Support image crop with arbitrary windows
- Display Interface
  - Support HDMI 1.4 output up to 1080P@60Hz
  - TV Interface: ITU-R BT.656(8-bit, 480i/576i/1080i),TV encoder 10bit out for DAC, RGB888+1080i for HDMI, Parallel RGB HDMI interface:24-bit(RGB888 YCbCr444)
  - Max output resolution 1920x1080 for HDMI, 480i/576i for CVBS
  - 4 display layers :
    - ◆ One background layer with programmable 24bits color
    - ◆ One video layer (win0)
      - RGB888, ARGB888, RGB565, YCbCr422, YCbCr420, YCbCr444
      - maximum resolution is 1920x1080,support virtual display
      - 1/8 to 8 scaling up/down engine with arbitrary non-integer ratio
      - 256 level alpha blending(pre-multiplied alpha support)
      - Support transparency color key
      - De-flicker support for interlace output
      - Direct path support
      - YCbCr2RGB(rec601-mpeg/rec601-jpeg/rec709)
      - RGB2YCbCr(BT601/BT709)
    - ◆ One video layer (win1)
      - RGB888, ARGB888, RGB565
      - Support virtual display
      - 256 level alpha blending (pre-multiplied alpha support)
      - Support transparency color key
      - Direct path support
      - RGB2YCbCr(BT601/BT709)
    - ◆ Hardware cursor(win3)
      - 8BPP (ARGB888 LUT)
      - Support two size: 32x32 and 64x64
      - 256 level alpha blending
      - Support hwc over panel at right and below side
  - Win0 and Win1 layer overlay exchangeable
  - 3 x 256 x 8 bits display LUTs
  - Support replication(16bits to 24bits) and dithering(24bits to 16bits/ 18bits) operation
  - Blank and blank display
  - Scaler
    - ◆ Output for RGB (max up to 1024x768), not support interlace

### 1.1.12 LVDS

- Up to 135MHz clock support
- 28:4 data sub channel compression at data rates up to 945 Mbps per channel
- Support VGA, SVGA, XGA and WXGA and 24bit display
- PLL requires no external components
- Comply with the standard TIA/EIA-644-A LVDS standard
- Support alternative LVDS output or LVTTTL output

### 1.1.13 MIPI DPHY

- Embedded 1 MIPI DPHY for TX
- Support 4 data lane
- Support WXGA 1280x800 @60fps output

### 1.1.14 HDMI

- HDMI version 1.4a, HDCP revision 1.4 and DVI version 1.0 compliant transmitter
  - Supports DTV from 480i to 1080i/p HD resolution
  - Supports 3D function defined in HDMI 1.4 spec
  - Supports data rate from 25MHz, 1.65Gbps up to 3.4Gbps over a Single channel
- HDMI
- TMDS Tx Drivers with programmable output swing, resistor values and pre-emphasis
  - Digital video interface supports a pixel size of 24, 30, 36, 48bits color depth in RGB
  - S/PDIF output supports PCM, Dolby Digital, DTS digital audio transmission (32-192kHz Fs) using IEC60958 and IEC 61937
  - Multiphase 4MHz fixed bandwidth PLL with low jitter
  - HDCP encryption and decryption engine contains all the necessary logic to encrypt the incoming audio and video data
  - Support HDMI LipSync if needed as add-on feature
  - Lower power operation with optimal power management feature
  - The EDID and CEC function are also supported by HDMI Transmitter Controller
  - Optional Monitor Detection supported through Hot Plug

### 1.1.15 Audio Interface

- I2S/PCM with 8ch
  - Up to 8 channels (8xTX, 2xRX)
  - Audio resolution from 16bits to 32bits
  - Sample rate up to 192KHz
  - Provides master and slave work mode, software configurable
  - Support 3 I2S formats (normal, left-justified, right-justified)
  - Support 4 PCM formats(early, late1, late2, late3)
  - I2S and PCM mode cannot be used at the same time
- I2S/PCM with 2ch
  - Up to 2 channels (2xTX, 2xRX)
  - Audio resolution from 16bits to 32bits
  - Sample rate up to 192KHz
  - Provides master and slave work mode, software configurable
  - Support 3 I2S formats (normal, left-justified, right-justified)
  - Support 4 PCM formats(early, late1, late2, late3)
  - I2S and PCM cannot be used at the same time
- SPDIF
  - Support two 16-bit audio data store together in one 32-bit wide location
  - Support biphasic format stereo audio data output
  - Support 16 to 31 bit audio data left or right justified in 32-bit wide sample data buffer
  - Support 16, 20, 24 bits audio data transfer in linear PCM mode
  - Support non-linear PCM transfer
- Audio Codec
  - Digital interpolation and decimation filter integrated
  - Line-in, Microphone in and Speaker out Interface
  - On-Chip Analog Post Filter and digital filters
  - Single-ended or differential Input and Output
  - Sampling Rate of 8kHz/12kHz/16kHz/ 24kHz/32kHz /48kHz/44.1K/96KHz
  - Support 16ohm to 32ohm Head Phone and Speaker Phone Output
  - Mono, Stereo channel supported
  - Optional Fractional PLL available that support 6Mhz to 20Mhz clock input to any clock output that meets 8kHz/12kHz/16kHz/ 24kHz/32kHz /48kHz/44.1K/96KHz

and 128 time oversampling ratio.

### **1.1.16 Connectivity**

- SDIO interface
  - Compatible with SDIO 3.0 protocol
  - 4bits data bus widths
- High-speed ADC stream interface
  - Support single-channel 8bits/10bits interface
  - DMA-based and interrupt-based operation
  - Support 8bits TS stream interface
- TS interface
  - Supports one TS input channel.
  - Supports 4 TS Input Mode: sync/valid mode in the case of serial TS input; nosync/valid mode, sync/valid, sync/burst mode in the case of parallel TS input.
  - Supports 2 TS sources: demodulators and local memory.
  - Supports 1 Built-in PTIs(Programmable Transport Interface) to process TS simultaneously, and Each PTI supports:
    - ◆ 64 PID filters.
    - ◆ TS descrambling with 16 sets of Control Word under CSA v2.0 standard, up to 104Mbps
    - ◆ 16 PES/ES filters with PTS/DTS extraction and ES start code detection.
    - ◆ 4 PCR extraction channels
    - ◆ 64 Section filters with CRC check, and three interrupt mode: stop per unit, full-stop, recycle mode with version number check
    - ◆ PID done and error interrupts for each channel
    - ◆ PCR/DTS/PTS extraction interrupt for each channel
  - 1 built-in multi-channel DMA Controller.
- Smart Card
  - support card activation and deactivation
  - support cold/warm reset
  - support Answer to Reset (ATR) response reception
  - support T0 for asynchronous half-duplex character transmission
  - support T1 for asynchronous half-duplex block transmission
  - support automatic operating voltage class selection
  - support adjustable clock rate and bit (baud) rate
  - support configurable automatic byte repetition
- GMAC 10/100/1000M Ethernet Controller
  - Supports 10/100/1000-Mbps data transfer rates with the RGMII interfaces
  - Supports 10/100-Mbps data transfer rates with the RMII interfaces
  - Supports both full-duplex and half-duplex operation
    - ◆ Supports CSMA/CD Protocol for half-duplex operation
    - ◆ Supports packet bursting and frame extension in 1000 Mbps half-duplex operation
    - ◆ Supports IEEE 802.3x flow control for full-duplex operation
    - ◆ Optional forwarding of received pause control frames to the user application in full-duplex operation
    - ◆ Back-pressure support for half-duplex operation
    - ◆ Automatic transmission of zero-quanta pause frame on deassertion of flow control input in full-duplex operation
  - Preamble and start-of-frame data (SFD) insertion in Transmit, and deletion in Receive paths
  - Automatic CRC and pad generation controllable on a per-frame basis
  - Options for Automatic Pad/CRC Stripping on receive frames

- Programmable InterFrameGap (40-96 bit times in steps of 8)
- Supports a variety of flexible address filtering modes
- Separate 32-bit status returned for transmission and reception packets
- Supports IEEE 802.1Q VLAN tag detection for reception frames
- Support detection of LAN wake-up frames and AMD Magic Packet frames
- Support checksum off-load for received IPv4 and TCP packets encapsulated by the Ethernet frame
- Support checking IPv4 header checksum and TCP, UDP, or ICMP checksum encapsulated in IPv4 or IPv6 datagrams
- Comprehensive status reporting for normal operation and transfers with errors
- Automatic generation of PAUSE frame control or backpressure signal to the GMAC core based on Receive FIFO-fill (threshold configurable) level
- Handles automatic retransmission of Collision frames for transmission
- Discards frames on late collision, excessive collisions, excessive deferral and underrun conditions
- SPI Controller
  - Support serial-master and serial-slave mode, software-configurable
  - DMA-based or interrupt-based operation
  - Embedded two 32x16bits FIFO for TX and RX operation respectively
  - Support 2 chip-selects output in serial-master mode
- UART Controller
  - 3 on-chip uart controller inside PX3 SE
  - DMA-based or interrupt-based operation
  - UART0 Embeds two 64Bytes FIFO for TX and RX operation respectively
  - UART1/UART2 Embeds two 32Bytes FIFO for TX and RX operation respectively
  - Support 5bit,6bit,7bit,8bit serial data transmit or receive
  - Standard asynchronous communication bits such as start,stop and parity
  - Support different input clock for uart operation to get up to 4Mbps or other special baud rate
  - Support non-integer clock divides for baud clock generation
  - Support auto flow control mode
- I2C controller
  - 4 on-chip I2C controller in PX3 SE
  - Multi-master I2C operation
  - Support 7bits and 10bits address mode
  - Software programmable clock frequency and transfer rate up to 400Kbit/s in the fast mode
  - Serial 8bits oriented and bidirectional data transfers can be made at up to 100Kbit/s in the standard mode
- GPIO
  - 4 groups of GPIO (GPIO0~GPIO3) , 32 GPIOs per group in GPIO0~GPIO3, totally have 128 GPIOs
  - All of GPIOs can be used to generate interrupt to Cortex-A7
  - All of pullup GPIOs are software-programmable for pullup resistor or not
  - All of pulldown GPIOs are software-programmable for pulldown resistor or not
  - All of GPIOs are always in input direction in default after power-on-reset
- USB Host2.0
  - Embedded 1 USB Host 2.0 interfaces
  - Compatible with USB Host2.0 specification
  - Supports high-speed(480Mbps), full-speed(12Mbps) and low-speed(1.5Mbps) mode
  - Provides 16 host mode channels

- Support periodic out channel in host mode
- USB OTG2.0
  - Compatible with USB OTG2.0 specification
  - Supports high-speed(480Mbps), full-speed(12Mbps) and low-speed(1.5Mbps) mode
  - Support up to 9 device mode endpoints in addition to control endpoint 0
  - Support up to 6 device mode IN endpoints including control endpoint 0
  - Endpoints 1/3/5/7 can be used only as data IN endpoint
  - Endpoints 2/4/6 can be used only as data OUT endpoint
  - Endpoints 8/9 can be used as data OUT and IN endpoint
  - Provides 9 host mode channels

### 1.1.17 Others

- SAR-ADC(Successive Approximation Register)
  - 3-channel single-ended 10-bit SAR analog-to-digital converter
  - Sample rate  $F_s$  is 200KHz
  - SAR-ADC clock must be large than  $11 \cdot F_s$ , recommend is  $11 \cdot F_s$
- eFuse
  - Two high-density electrical Fuse is integrated: 512bits (64x8)
  - Support standby mode
  - Provide inactive mode, VP must be 0V or Floating in this mode.
- Package Type
  - BGA316 (body: 14mm x 14mm ; ball size : 0.3mm ; ball pitch : 0.65mm)

Notes :<sup>①</sup> : DDR3/LPDDR2/LPDDR3 are not used simultaneously as well as async and sync ddrnand flash  
<sup>②</sup> : In PX3 SE, Video decoder and encoder are not used simultaneously because of shared internal buffer  
<sup>③</sup> : Actual maximum frame rate will depend on the clock frequency and system bus performance  
<sup>④</sup> : Actual maximum data rate will depend on the clock frequency and JPEG compression rate

## 1.2 Block Diagram

The following diagram shows the basic block diagram for PX3 SE.

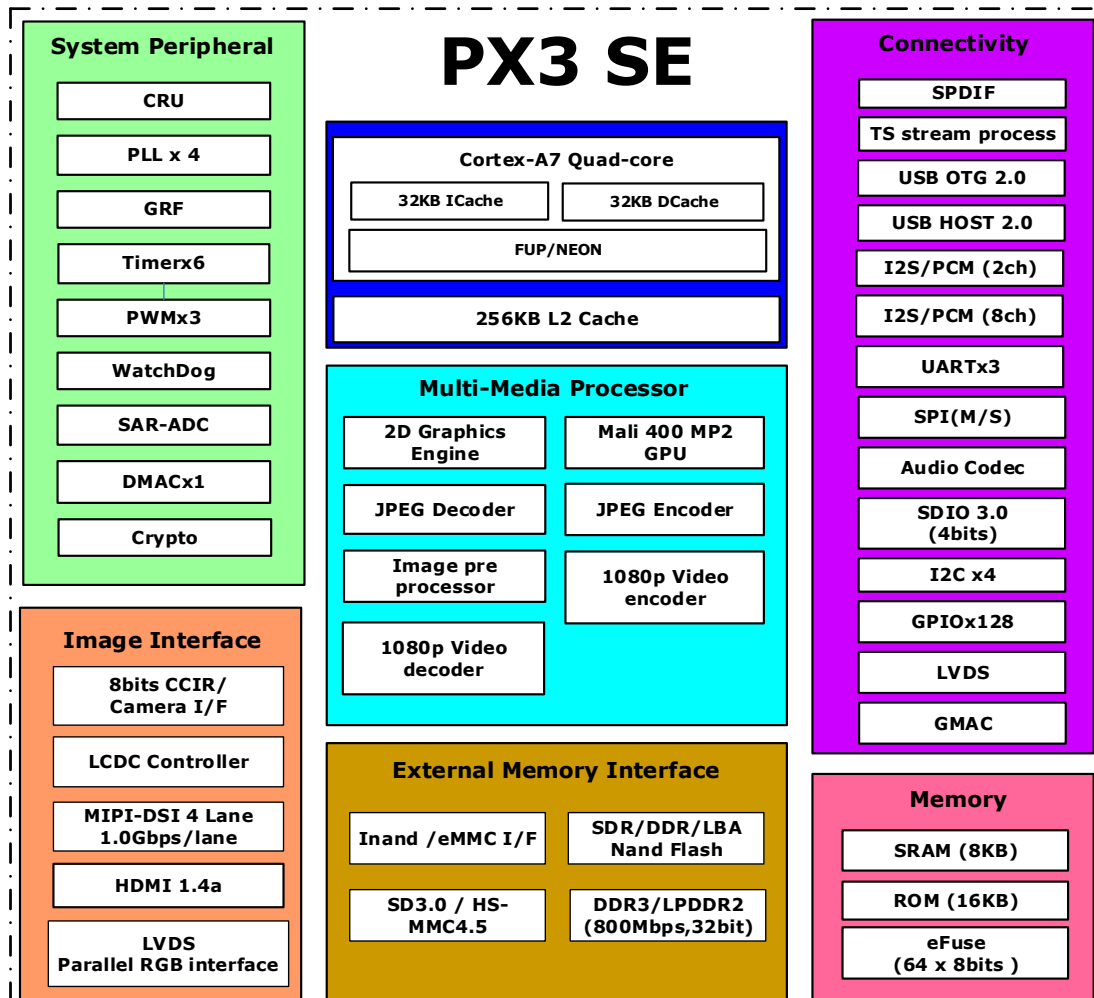



Fig.1-1 PX3 SE Block Diagram

## Chapter 2 Package information

### 2.1 Ordering information

| Orderable Device | RoHS status | Package  | Package Qty | Device Feature  |
|------------------|-------------|----------|-------------|-----------------|
| PX3 SE           | Pb-Free     | TFBGA316 | 1190        | Quad core A7 AP |

### 2.2 Top Marking

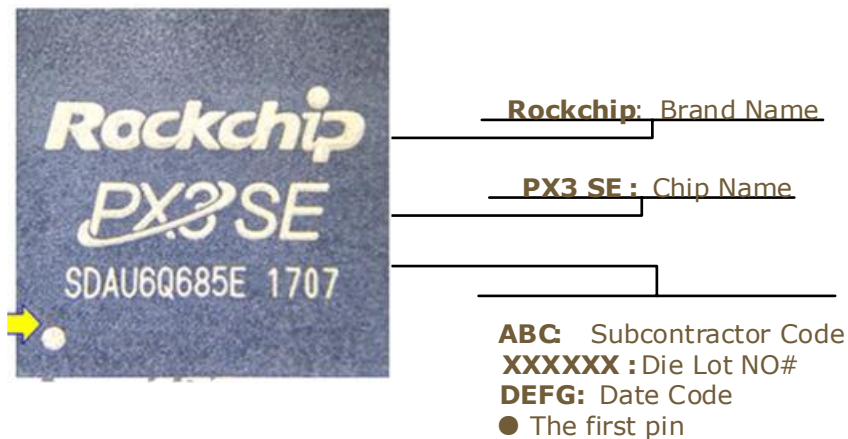

### 2.3 TFBGA316 Dimension

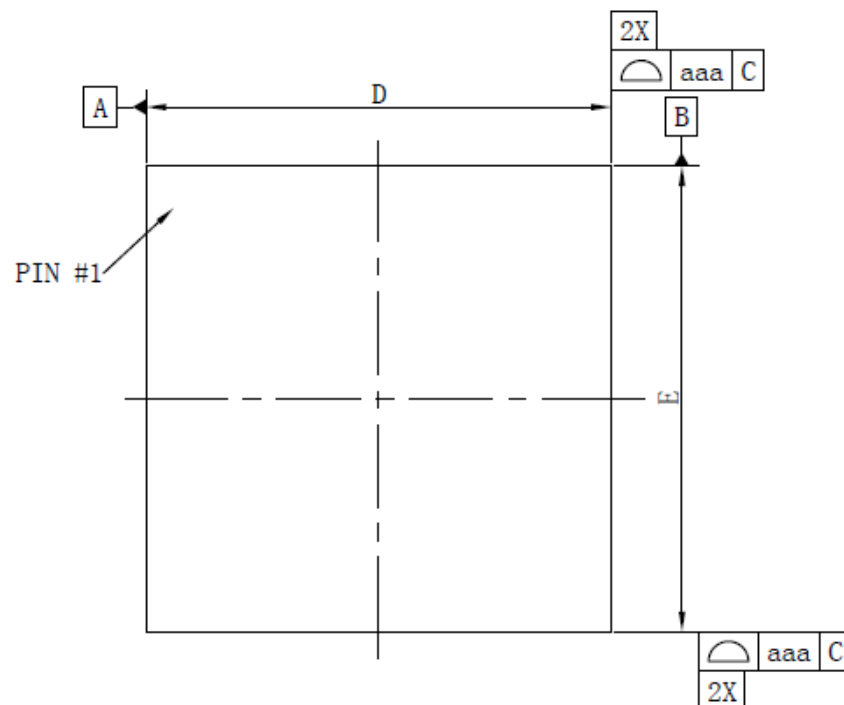


Fig.2-1 PX3 SE TFBGA316 Package Top View

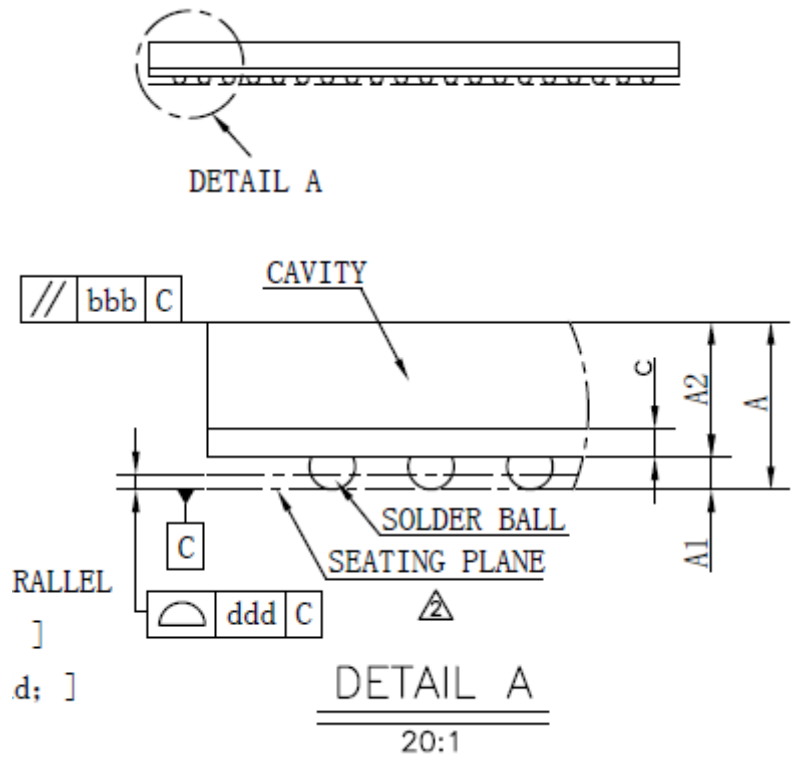


Fig.2-2 PX3 SE TFBGA316 Package Side View

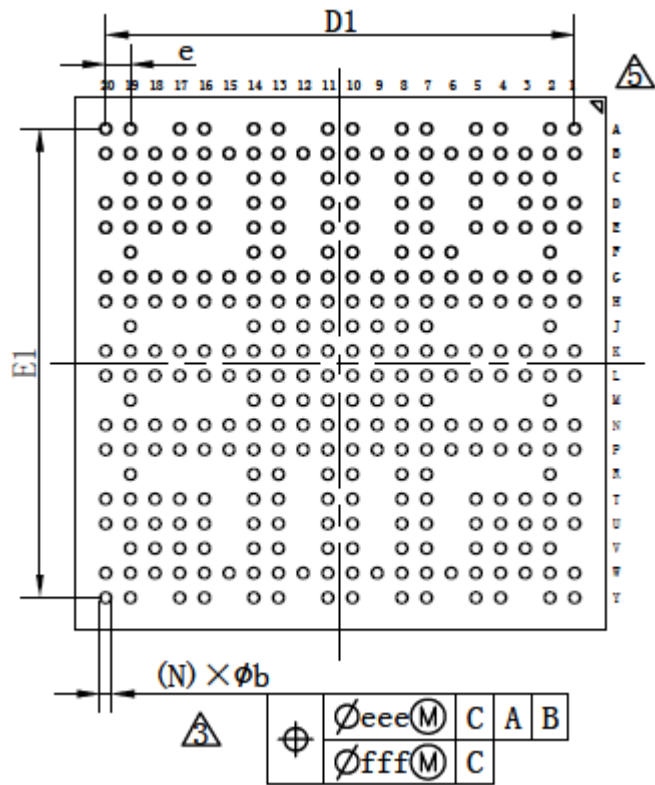


Fig.2-3 PX3 SE TFBGA316 Package Bottom View

| symbol | Dimension in mm |        |        | Dimension in inch |       |       |
|--------|-----------------|--------|--------|-------------------|-------|-------|
|        | MIN             | NOM    | MAX    | MIN               | NOM   | MAX   |
| A      | —               | —      | 1.200  | —                 | —     | 0.047 |
| A1     | 0.160           | 0.210  | 0.260  | 0.006             | 0.008 | 0.010 |
| A2     | 0.840           | 0.890  | 0.940  | 0.033             | 0.035 | 0.037 |
| c      | 0.150           | 0.190  | 0.230  | 0.006             | 0.007 | 0.009 |
| D      | 13.900          | 14.000 | 14.100 | 0.547             | 0.551 | 0.555 |
| E      | 13.900          | 14.000 | 14.100 | 0.547             | 0.551 | 0.555 |
| D1     | —               | 12.350 | —      | —                 | 0.486 | —     |
| E1     | —               | 12.350 | —      | —                 | 0.486 | —     |
| e      | —               | 0.650  | —      | —                 | 0.026 | —     |
| b      | 0.250           | 0.300  | 0.350  | 0.010             | 0.012 | 0.014 |
| aaa    | 0.150           |        |        | 0.006             |       |       |
| bbb    | 0.200           |        |        | 0.008             |       |       |
| ddd    | 0.080           |        |        | 0.003             |       |       |
| eee    | 0.150           |        |        | 0.006             |       |       |
| fff    | 0.080           |        |        | 0.003             |       |       |
| N      | 316             |        |        | 316               |       |       |
| MD/ME  | 20/20           |        |        | 20/20             |       |       |

Fig.2-4 PX3 SE TFBGA316 Package Dimension

## 2.4 TFBGA316 Ball Map

| 316 | 1         | 2           | 3         | 4         | 5         | 6           | 7         | 8           | 9         | 10        | 11          | 12        | 13                    | 14                                 | 15                           | 16                                     | 17                                         | 18                                                    | 19                                         | 20                                            |   |
|-----|-----------|-------------|-----------|-----------|-----------|-------------|-----------|-------------|-----------|-----------|-------------|-----------|-----------------------|------------------------------------|------------------------------|----------------------------------------|--------------------------------------------|-------------------------------------------------------|--------------------------------------------|-----------------------------------------------|---|
| A   | DDR_CSN_0 | DDR_A4      | NP        | DDR_A1    | DDR_A15   | NP          | DDR_DQ3   | DDR_DQS_0   | NP        | DDR_DQ1_6 | DDR_DQS_2   | NP        | DDR_DQ2_3             | DDR_DQ0                            | NP                           | CODEC_A_OMS                            | CODEC_V_CM                                 | NP                                                    | GPIO0_D1/<br>UART2_CT<br>SN                | GPIO0_D6/<br>SDMMC1_<br>PWR                   | A |
| B   | DDR_CLK   | DDR_ODT_0   | DDR_CKE   | DDR_A12   | DDR_A14   | DDR_CSN_1   | DDR_DM0   | DDR_DQS_0_N | DDR_DQ1_8 | DDR_DQ4   | DDR_DQS_2_N | DDR_DQ2_1 | DDR_DQ6               | VSS22                              | CODEC_A_OR                   | CODEC_A_OM                             | CODEC_A_OL                                 | CODEC_MI_CBIAS                                        | GPIO1_B4/<br>SPI_CS_N1                     | GPIO0_A6/<br>HDMI_SCL<br>/I2C3_SCL            | B |
| C   | NP        | DDR_CLK_N   | VSS54     | DDR_A10   | DDR_A11   | NP          | VSS1      | DDR_DQ7     | NP        | VSS2      | DDR_DQ1_7   | NP        | VSS7                  | CODEC_H_PDET                       | NP                           | CODEC_AI_L                             | GPIO0_D0/<br>UART2_RT<br>SN/PMIC_<br>SLEEP | GPIO3_C6                                              | GPIO0_C4/<br>HDMI_CEC                      | NP                                            | C |
| D   | DDR_A0    | DDR_A3      | DDR_BA2   | NP        | DDR_WEN   | NP          | DDR_BA0   | DDR_A8      | NP        | DDR_DQ5   | DDR_DM2     | NP        | CODEC_A_VDD           | CODEC_A_VSS                        | NP                           | CODEC_AI_R                             | GPIO0_A3/<br>I2C1_SDA/<br>SDMMC1_<br>CMD   | GPIO1_B7/<br>SDMMC0_<br>CMD                           | GPIO3_C4                                   | GPIO0_A0/<br>I2C0_SCL                         | D |
| E   | DDR_A9    | DDR_A2      | DDR_RAS_N | DDR_A7    | DDR_A5    | NP          | DDR_CAS_N | DDR_BA1     | NP        |           | DDR_DQ1_9   | NP        | GPIO0_B7/<br>HDMI_HPD | CODEC_MI_CL                        | NP                           | CODEC_MI_CR                            | GPIO0_A1/<br>I2C0_SDA                      | GPIO1_A1/<br>I2S_SCLK/<br>SDMMC1_<br>RX/SDMM<br>C1_D1 | GPIO1_A2/<br>I2S_LRCK_<br>RX/SDMM<br>C1_D1 | GPIO1_A0/<br>I2S_MCLK/<br>SDMMC1_<br>CLKO/XIN | E |
| F   | NP        | DDR_DQ1_0   | NP        | NP        | NP        | DDR_RES_ETN | DDR_A6    | DDR_DQ1     | NP        | DDR_DQ2_2 | DDR_DQ2     | NP        | GPIO3_C5              | GPIO0_A7/<br>HDMI_SDA<br>/I2C3_SDA | NP                           | NP                                     | NP                                         | NP                                                    | GPIO0_A2/<br>I2C1_SCL                      | NP                                            | F |
| G   | DDR_A13   | DDR_ODT_1   | VSS3      | DDR_DQ2_6 | DDR_DQ9   | DDR_DQ8     | CVDD1     | DDR_VDD_5   | DDR_VDD_6 | CVDD6     | DDR_VDD_7   | DDR_VDD_8 | VSS6                  | VCCIO4                             | GPIO1_A3/<br>I2S_LRCK_<br>TX | GPIO1_A4/<br>I2S_SDO/S<br>DMMC1_D<br>2 | GPIO1_A5/<br>I2S_SDI/S<br>DMMC1_D<br>3     | GPIO1_B3/<br>UART1_RT<br>SN/SPI_CS<br>N0              | GPIO1_B0/<br>UART1_CT<br>SN/SPI_CL<br>K    | GPIO3_C7                                      | G |
| H   | DDR_DQS_1 | DDR_DQS_1_N | DDR_DQ1_2 | DDR_DM1   | DDR_DQ2_8 | DDR_DQ1_1   | DDR_VDD_4 | VSS15       | VSS16     | VSS17     | VSS18       | VSS19     | VSS20                 | CVDD5                              | TEST                         | GPIO0_B4/<br>I2S_LRCK_<br>TX           | GPIO0_B0/<br>I2S_MCLK                      | GPIO1_B1/<br>UART1_TX<br>/SPI_TXD                     | GPIO1_B2/<br>UART1_RX<br>/SPI_RXD          | SDMMC0_<br>CLKO                               | H |

|   |                                           |                                    |                                    |                                    |                                   |                                  |                                   |                                         |             |                                 |                                 |       |                                 |                                |                                     |                                    |                                     |                                   |                                    |                                    |   |
|---|-------------------------------------------|------------------------------------|------------------------------------|------------------------------------|-----------------------------------|----------------------------------|-----------------------------------|-----------------------------------------|-------------|---------------------------------|---------------------------------|-------|---------------------------------|--------------------------------|-------------------------------------|------------------------------------|-------------------------------------|-----------------------------------|------------------------------------|------------------------------------|---|
| J | NP                                        | DDR_DQ1_3                          | NP                                 | NP                                 | NP                                | NP                               | DDR_VDD_3                         | VSS23                                   | VSS24       | VSS25                           | VSS26                           | VSS27 | VSS28                           | CVDD4                          | NP                                  | NP                                 | NP                                  | NP                                | GPIO0_B3/I2S_LRCK_RX/SPI_TX_D      | NP                                 | J |
| K | DDR_DQ1_5                                 | DDR_DQ1_4                          | VSS4                               | DDR_DQ2_4                          | DDR_DQ2_7                         | DDR_DQ2_9                        | CVDD2                             | VSS21                                   | VSS29       | VSS30                           | VSS46                           | VSS31 | VSS32                           | VCCIO3                         | GPIO1_C3/SDMMC0_D1/UART2_RX         | GPIO1_C4/SDMMC0_D2/JTAG_TCK        | GPIO2_A4/FLASH_RDY/EMMC_CMD/SFC_CS  | GPIO3_D7/CIF_PDN0/TEST_CLK_O      | GPIO0_B6/I2S_SDI/SPI_CLK           | GPIO0_B1/I2S_SCLK/SPI_CLK          | K |
| L | DDR_DQS_3                                 | DDR_DQS_3_N                        | DDR_DM3                            | DDR_DQ2_5                          | DDR_DQ3_0                         | DDR_DQ3_1                        | DDR_VDD_2                         | VSS33                                   | VSS34       | VSS35                           | VSS36                           | VSS37 | VSS38                           | VSS39                          | GPIO2_A3/FLASH_RDN/SFC_CS_N1        | GPIO2_A6/FLASH_CS_0                | GPIO0_C7/FLASH_CS_1                 | GPIO1_C2/SDMMC0_D0/UART2_TX       | GPIO1_A7/SDMMC0_WP                 | GPIO0_B5/I2S_SDO/SPI_RXD           | L |
| M | NP                                        | VSS5                               | NP                                 | NP                                 | NP                                | NP                               | DDR_VDD_1                         | VSS40                                   | VSS41       | VSS42                           | VSS43                           | VSS44 | VSS45                           | AVDD5                          | NP                                  | NP                                 | NP                                  | NP                                | GPIO1_C5/SDMMC0_D3/JTAG_TMS        | NP                                 | M |
| N | XOUT24M                                   | XIN24M                             | A/GPLL_DV_DD11                     | C/DPLL_DV_DD11                     | PLL_VCCIO                         | VCCIO1                           | VSS47                             | VSS48                                   | VSS49       | VSS50                           | VSS51                           | VSS52 | VSS53                           | AVDD4                          | GPIO1_D6/FLASH_D6/EMMC_D6/SPI_CS_N0 | GPIO2_A0/FLASH_ALS/E/SPI_CLK       | GPIO2_A1/FLASH_CL_E                 | GPIO1_B6/SDMMC0_PWR               | GPIO2_A7/FLASH_DQ3/EMMC_RLKO       | NPOR                               | N |
| P | GPIO2_C2/LCDC_D16/EBC_GDSP/GMAC_T         | GPIO2_C3/LCDC_D17/EBC_GDPWR0/GMA   | GPIO2_C5/LCDC_D19/EBC_SDSHR/I2C2_S | GPIO2_C7/LCDC_D21/EBC_BORDER1/GPS  | GPIO2_C6/LCDC_D20/EBC_BORDER0/GPS | GPIO2_D0/LCDC_D22/EBC_GDPWR1/GPS | VSS13                             | VSS8                                    | SAR_AVD_D33 | CVDD3                           | ADCIN0                          | AVDD1 | AVDD2                           | AVDD3                          | GPIO0_C1/CARD_IO/UART0_RT_SN        | GPIO1_D0/FLASH_D0/EMMC_D0/SFC_SIO0 | GPIO1_D7/FLASH_D7/EMMC_D7/SPI_CS_N1 | GPIO1_D4/FLASH_D4/EMMC_D4/SPI_RXD | GPIO1_C7/FLASH_CS3/EMMC_RST        | GPIO2_A2/FLASH_WRN/SFC_CS_N0       | P |
| R | NP                                        | GPIO2_C1/LCDC_D15/EBC_GDOE/GMAC_R  | NP                                 | NP                                 | NP                                | NP                               | LVDS/MIPI_VCC1                    | LVDS/MIPI_VDD11                         | NP          | EFUSE                           | USB0_ID                         | NP    | CIF_D5/TS_D5                    | CIF_D6/TS_D6                   | NP                                  | NP                                 | NP                                  | NP                                | GPIO1_D5/FLASH_D5/EMMC_D5/SPI_TXD  | NP                                 | R |
| T | GPIO2_B7/LCDC_D13/EBC_SDCES/GMAC_         | GPIO2_D1/LCDC_D23/EBC_GDPMWR2/GMA  | GPIO2_C0/LCDC_D14/EBC_VCOM/GMAC_   | GPIO2_C4/LCDC_D18/EBC_GDR/LI2C2_SD | GPIO2_B1/LCDC_HS_YNCEBC_SDLCE/GMA | NP                               | VDAC_AVDD                         | VDAC_AGNDD                              | NP          | USB_AVD_D33                     | USB_DVD_D11                     | NP    | CIF_D4/TS_D4                    | VCCIO2                         | NP                                  | CIF_D7/TS_D7                       | GPIO0_D3/PWM1                       | GPIO2_D2/CARD_RST/UART0_TX        | GPIO1_D2/FLASH_D2/EMMC_D2/SFC_SIO2 | GPIO1_D3/FLASH_D3/EMMC_D3/SFC_SIO3 | T |
| U | GPIO2_B3/LCDC_DE/LCDC_D11N/EBC_GDCLK/GMAC | GPIO2_B5/LCDC_D11/EBC_SDCES3/GMAC_ | GPIO2_B4/LCDC_D10/EBC_SDCES2/GMAC_ | GPIO2_B6/LCDC_D12/EBC_SDCES4/GMAC_ | GPIO2_B0/LCDC_CLK/EBC_SCLK/GMAC_  | NP                               | VDAC_IOUTN                        | VDAC_IREF                               | NP          | ADCIN1                          | USB0_VBUS                       | NP    | CIF_VSYNCT/TS_SYN_C             | GPIO3_C1/DRIVE_VBUS/PMIC_SLEEP | NP                                  | CIF_CLKI/TS_VALID                  | CIF_D0/TS_D0                        | GPIO0_D2/PWM0                     | GPIO1_C6/FLASH_CS2/EMMC_CMD        | GPIO1_D1/FLASH_D1/EMMC_D1/SFC_SIO1 | U |
| V | NP                                        | HDMI_AVD_D33                       | VSS14                              | HDMI_DVD_D1V1_1                    | LCDC_VSYNCEBC_SDOE/GMA            | NP                               | VDAC_IOUTP                        | LVDS/MIPI_EXTR                          | NP          | ADCIN2                          | USB_EXTR                        | NP    | CIF_CLKO/TS_CLKO                | GPIO0_D4/PWM2                  | NP                                  | CIF_D3/TS_D3                       | CIF_D1/TS_D1                        | CIF_HREF/TS_FAIL                  | GPIO2_A5/FLASH_WP/EMMC_PWR         | NP                                 | V |
| W | HDMI_TX3_N                                | HDMI_TX0_N                         | HDMI_EXT_R                         | HDMI_TX1_N                         | HDMI_TX2_N                        | VSS9                             | LCDC_D9/LVDS_CLKN/EBC_SDCES1/MIPI | LCDC_D6/LVDS_TX3N/EBC_SDP/EBC_SDO6/MIPI | VSS10       | LCDC_D5/LVDS_TX2N/EBC_SDO5/MIPI | LCDC_D3/LVDS_TX1N/EBC_SDO3/MIPI | VSS12 | LCDC_D1/LVDS_TX0N/EBC_SDO1/MIPI | USB1_DP                        | VSS11                               | USB0_DP                            | CIF_D2/TS_D2                        | GPIO3_D2/IR                       | GPIO1_C1/SDMMC0_DET                | GPIO2_D5/CARD_DETT/UART0_CTSN      | W |
| Y | HDMI_TX3_P                                | HDMI_TX0_P                         | NP                                 | HDMI_TX1_P                         | HDMI_TX2_P                        | NP                               | LCDC_D8/LVDS_CLKP/EBC_SDCES0/MIPI | LCDC_D7/LVDS_TX3P/EBC_SDP/EBC_SDO7/MIPI | NP          | LCDC_D4/LVDS_TX2P/EBC_SDO4/MIPI | LCDC_D2/LVDS_TX1P/EBC_SDO2/MIPI | NP    | LCDC_D0/LVDS_TX0P/EBC_SDO0/MIPI | USB1_DM                        | NP                                  | USB0_DM                            | GPIO2_D3/CARD_CLK/UART0_RX          | NP                                | GPIO3_D3/SPDIF                     | CIF_PDN1/GPIO3_B3                  | Y |
|   | 1                                         | 2                                  | 3                                  | 4                                  | 5                                 | 6                                | 7                                 | 8                                       | 9           | 10                              | 11                              | 12    | 13                              | 14                             | 15                                  | 16                                 | 17                                  | 18                                | 19                                 | 20                                 |   |

Fig.2-5 TFBGA316 Ball Map

## 2.5 Pin Description

In this chapter, the pin description will be divided into two parts, one is all power/ground descriptions in Table 1-1, include analog power/ground, another is all the function signals descriptions in Table 1-2, also include analog power/ground.

### 2.5.1 PX3 SE power/ground IO descriptions

Table 2-1 PX3 SE Power/Ground IO information

| Group          | Ball #                                                                                                                                                                                           | Descriptions                                    |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| GND            | B14,C3,C7,C10,C13,G3,G13,H8,H9,H10,H11,H12,H13,J8,J9,J10,J11,J12,J13,K3,K8,K9,K10,K11,K12,K13,L8,L9,L10,L11,L12,L13,L14,M2,M8,M9,M10,M11,M12,M13,N7,N8,N9,N10,N11,N12,N13,P7,P8,V3,W6,W9,W12,W15 | Internal Core Ground and Digital IO Ground      |
| AVDD           | P12,P13,P14,N14,M14                                                                                                                                                                              | Internal CPU Power (@ cpu frequency <= 1GHz)    |
| CVDD           | G7,K7,P10,J14,H14,G10                                                                                                                                                                            | Internal Core Power                             |
| VCCIO1         | N6                                                                                                                                                                                               | Digital GPIO Power                              |
| VCCIO2         | T14                                                                                                                                                                                              | Digital GPIO Power                              |
| VCCIO3         | K14                                                                                                                                                                                              | Digital GPIO Power                              |
| VCCIO4         | G14                                                                                                                                                                                              | Digital GPIO Power                              |
| DDR_VDD        | H7,J7,L7,M7,G12,G11,G9,G8                                                                                                                                                                        | DDR3 Digital IO Power<br>DDR3L Digital IO Power |
| A/GPLL_DVDD11  | N3                                                                                                                                                                                               | ARM PLL Analog Power                            |
| C/DPLL_DVDD11  | N4                                                                                                                                                                                               | DDR PLL Analog Power                            |
| PLL_VCCIO      | N5                                                                                                                                                                                               | DDR PLL Analog Power                            |
| SAR_AVDD33     | P9                                                                                                                                                                                               | SAR-ADC Analog Power                            |
| USB_DVDD11     | T11                                                                                                                                                                                              | USB OTG2.0/Host2.0 Digital Power                |
| USB_AVDD33     | T10                                                                                                                                                                                              | USB OTG2.0/Host2.0 Analog Power                 |
| CODEC_AVDD     | D13                                                                                                                                                                                              | Audio Codec Analog Power                        |
| CODEC_AVSS     | D14                                                                                                                                                                                              | Audio Codec Analog Ground                       |
| HDMI_DVDD1V1_1 | V4                                                                                                                                                                                               | HDMI Digital Power                              |
| HDMI_AVDD33    | V2                                                                                                                                                                                               | HDMI Analog Power                               |
| VBS_DAC_C_AVDD | T7                                                                                                                                                                                               | CVBS DAC Analog Power                           |
| CVBS_DAC_AGND  | T8                                                                                                                                                                                               | CVBS DAC Analog Ground                          |

## 2.5.2 PX3 SE function IO descriptions

Table 2-2 PX3 SE IO descriptions

| Ball Name  | Ball # | func1 | func2 | func3 | func4 | Func5 | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|------------|--------|-------|-------|-------|-------|-------|------------------|--------------|------------------|---------------------|----------------------|
| DDR_A0     | D1     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_A2     | E2     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_A5     | E5     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_A9     | E1     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_A13    | G1     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_A7     | E4     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_ODT1   | G2     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_RESETN | F6     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ10   | F2     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ8    | G6     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQS1   | H1     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQS1_N | H2     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ14   | K2     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ12   | H3     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ15   | K1     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ13   | J2     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ9    | G5     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DM1    | H4     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ11   | H6     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ26   | G4     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ24   | K4     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQS3   | L1     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQS3_N | L2     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ30   | L5     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ28   | H5     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ31   | L6     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ29   | K6     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ25   | L4     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DM3    | L3     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |
| DDR_DQ27   | K5     |       |       |       |       |       | N/A              | N/A          | N/A              | N/A                 | DDR                  |

| Ball Name                                        | Ball # | func1    | func2      | func3      | func4    | Func5       | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|--------------------------------------------------|--------|----------|------------|------------|----------|-------------|------------------|--------------|------------------|---------------------|----------------------|
| XOUT24M                                          | N1     |          |            |            |          |             | N/A              | N/A          | N/A              | O                   | MISC                 |
| XIN24M                                           | N2     |          |            |            |          |             | N/A              | N/A          | N/A              | I                   | MISC                 |
| GPIO2_C6/LCDC_D20/EBC_BORDER0/GPS_SIGN/GMAC_TXD2 | P5     | GPIO2_C6 | LCDC_D20   | GMAC_TXD2  | GPS_S1GN | EBC_BORDER0 | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_C7/LCDC_D21/EBC_BORDER1/GPS_MAG/GMAC_TXD3  | P4     | GPIO2_C7 | LCDC_D21   | GMAC_TXD3  | GPS_MAG  | EBC_BORDER1 | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_C5/LCDC_D19/EBC_SDSHR/I2C2_SCL/GMAC_RXD2   | P3     | GPIO2_C5 | LCDC_D19   | GMAC_RXD2  | I2C2_SCL | EBC_SDSHR   | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_C4/LCDC_D18/EBC_GDRL/I2C2_SDA/GMAC_RXD3    | T4     | GPIO2_C4 | LCDC_D18   | GMAC_RXD3  | I2C2_SDA | EBC_GDRL    | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_C3/LCDC_D17/EBC_GDPWR0/GMAC_TXD0           | P2     | GPIO2_C3 | LCDC_D17   | GMAC_TXD0  |          | EBC_GDPWR0  | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_C2/LCDC_D16/EBC_GDSP/GMAC_TXD1             | P1     | GPIO2_C2 | LCDC_D16   | GMAC_TXD1  |          | EBC_GDSP    | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_C1/LCDC_D15/EBC_GDOE/GMAC_RXD0             | R2     | GPIO2_C1 | LCDC_D15   | GMAC_RXD0  |          | EBC_GDOE    | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_C0/LCDC_D14/EBC_VCOM/GMAC_RXD1             | T3     | GPIO2_C0 | LCDC_D14   | GMAC_RXD1  |          | EBC_VCOM    | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_D1/LCDC_D23/EBC_GDPWR2/GMAC_MDC            | T2     | GPIO2_D1 | LCDC_D23   | GMAC_MDC   |          | EBC_GDPWR2  | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_D0/LCDC_D22/EBC_GDPWR1/GPS_CLK/GMAC_COL    | P6     | GPIO2_D0 | LCDC_D22   | GMAC_COL   | GPS_CLK  | EBC_GDPWR1  | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_B7/LCDC_D13/EBC_SDCE5/GMAC_RXER            | T1     | GPIO2_B7 | LCDC_D13   | GMAC_RXER  |          | EBC_SDCE5   | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_B6/LCDC_D12/EBC_SDCE4/GMAC_CLK             | U4     | GPIO2_B6 | LCDC_D12   | GMAC_CLK   |          | EBC_SDCE4   | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_B5/LCDC_D11/EBC_SDCE3/GMAC_TXEN            | U2     | GPIO2_B5 | LCDC_D11   | GMAC_TXEN  |          | EBC_SDCE3   | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_B4/LCDC_D10/EBC_SDCE2/GMAC_MDIO            | U3     | GPIO2_B4 | LCDC_D10   | GMAC_MDIO  |          | EBC_SDCE2   | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_B3/LCDC_DEN/EBC_GDCLK/GMAC_RXCLK           | U1     | GPIO2_B3 | LCDC_DEN   | GMAC_RXCLK |          | EBC_GDCLK   | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_B2/LCDC_VSYNC/EBC_SDOE/GMAC_CRS            | V5     | GPIO2_B2 | LCDC_VSYNC | GMAC_CRS   |          | EBC_SDOE    | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_B1/LCDC_HSYNC/EBC_SDLCLK/GMAC_TXCLK        | T5     | GPIO2_B1 | LCDC_HSYNC | GMAC_TXCLK |          | EBC_SDLCLK  | I/O              | 8mA          | down             | I                   | LCDC                 |
| GPIO2_B0/LCDC_CLK/EBC_SDCLK/GMAC_RXDV            | U5     | GPIO2_B0 | LCDC_CLK   | GMAC_RXDV  |          | BC_SDCLK    | I/O              | 12mA         | down             | I                   | LCDC                 |
| HDMI_EXTR                                        | W3     |          |            |            |          |             | N/A              | N/A          | N/A              | N/A                 | HDMI                 |

| Ball Name                                 | Ball # | func1     | func2   | func3         | func4 | Func5     | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|-------------------------------------------|--------|-----------|---------|---------------|-------|-----------|------------------|--------------|------------------|---------------------|----------------------|
| HDMI_TX3N                                 | W1     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | HDMI                 |
| HDMI_TX3P                                 | Y1     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | HDMI                 |
| HDMI_TX0N                                 | W2     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | HDMI                 |
| HDMI_TX0P                                 | Y2     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | HDMI                 |
| HDMI_TX1N                                 | W4     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | HDMI                 |
| HDMI_TX1P                                 | Y4     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | HDMI                 |
| HDMI_TX2N                                 | W5     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | HDMI                 |
| HDMI_TX2P                                 | Y5     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | HDMI                 |
| TV ENCODER_IOUTN                          | U7     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | TV                   |
| TV ENCODER_IOUTP                          | V7     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | TV                   |
| TV ENCODER_IREF                           | U8     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | TV                   |
| LVDS/MIPI_EXTR                            | V8     |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | LVDS                 |
| LCDC_D9/LVDS_CLKN/EBC_SDC<br>E1/MIPI_CLKN | W7     | LVDS_CLKN | LCDC_D9 | MIPI_CLK<br>N |       | EBC_SDCE1 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D8/LVDS_CLKP/EBC_SDCE<br>0/MIPI_CLKP | Y7     | LVDS_CLKP | LCDC_D8 | MIPI_CLK<br>P |       | EBC_SDCE0 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D7/LVDS_TX3N/EBC_SDD<br>07/MIPI_D3N  | Y8     | LVDS_TX3N | LCDC_D7 | MIPI_D3N      |       | EBC_SDD07 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D6/LVDS_TX3P/EBC_SDD<br>06/MIPI_D3P  | W8     | LVDS_TX3P | LCDC_D6 | MIPI_D3P      |       | EBC_SDD06 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D5/LVDS_TX2N/EBC_SDD<br>05/MIPI_D2N  | W10    | LVDS_TX2N | LCDC_D5 | MIPI_D2N      |       | EBC_SDD05 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D4/LVDS_TX2P/EBC_SDD<br>04/MIPI_D2P  | Y10    | LVDS_TX2P | LCDC_D4 | MIPI_D2P      |       | EBC_SDD04 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D3/LVDS_TX1N/EBC_SDD<br>03/MIPI_D1N  | W11    | LVDS_TX1N | LCDC_D3 | MIPI_D1N      |       | EBC_SDD03 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D2/LVDS_TX1P/EBC_SDD<br>02/MIPI_D1P  | Y11    | LVDS_TX1P | LCDC_D2 | MIPI_D1P      |       | EBC_SDD02 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D1/LVDS_TX0N/EBC_SDD<br>01/MIPI_D0N  | W13    | LVDS_TX0N | LCDC_D1 | MIPI_D0N      |       | EBC_SDD01 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| LCDC_D0/LVDS_TX0P/EBC_SDD<br>00/MIPI_D0P  | Y13    | LVDS_TX0P | LCDC_D0 | MIPI_D0P      |       | EBC_SDD00 | N/A              | NA/          | N/A              | N/A                 | LVDS                 |
| USB1_DP                                   | W14    |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | USB                  |
| USB1_DM                                   | Y14    |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | USB                  |
| USB_EXTR                                  | V11    |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | USB                  |
| USB0_VBUS                                 | U11    |           |         |               |       |           | N/A              | N/A          | N/A              | N/A                 | USB                  |

| Ball Name                          | Ball # | func1     | func2          | func3          | func4 | Func5 | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|------------------------------------|--------|-----------|----------------|----------------|-------|-------|------------------|--------------|------------------|---------------------|----------------------|
| USB0_ID                            | R11    |           |                |                |       |       | N/A              | N/A          | N/A              | N/A                 | USB                  |
| USB0_DM                            | Y16    |           |                |                |       |       | N/A              | N/A          | N/A              | N/A                 | USB                  |
| USB0_DP                            | W16    |           |                |                |       |       | N/A              | N/A          | N/A              | N/A                 | USB                  |
| ADCIN0                             | P11    |           |                |                |       |       | N/A              | N/A          | N/A              | N/A                 | ADC                  |
| ADCIN1                             | U10    |           |                |                |       |       | N/A              | N/A          | N/A              | N/A                 | ADC                  |
| ADCIN2                             | V10    |           |                |                |       |       | N/A              | N/A          | N/A              | N/A                 | ADC                  |
| EFUSE                              | R10    |           |                |                |       |       | N/A              | N/A          | N/A              | N/A                 | ADC                  |
| CIF_D0/TS_D0                       | U17    | CIF_D0    | TS_D0          |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_D1/TS_D1                       | V17    | CIF_D1    | TS_D1          |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_D2/TS_D2                       | W17    | CIF_D2    | TS_D2          |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_D3/TS_D3                       | V16    | CIF_D3    | TS_D3          |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_D4/TS_D4                       | T13    | CIF_D4    | TS_D4          |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_D5/TS_D5                       | R13    | CIF_D5    | TS_D5          |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_D6/TS_D6                       | R14    | CIF_D6    | TS_D6          |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_D7/TS_D7                       | T16    | CIF_D7    | TS_D7          |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_VSYNC/TS_SYNC                  | U13    | CIF_VSYNC | TS_SYNC        |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_CLKI/TS_VALID                  | U16    | CIF_CLKI  | TS_VALID       |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| CIF_HREF/TS_FAIL                   | V18    | CIF_HREF  | TS_FAIL        |                |       |       | I/O              | 4mA          | down             | I                   | CIF                  |
| GPIO3_C1/DRIVE_VBUS/PMIC_S<br>LEEP | U14    | GPIO3_C1  | DRIVE_V<br>BUS | PMIC_SLE<br>EP |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| CIF_CLKO/TS_CLKO                   | V13    | CIF_CLKO  | TS_CLKO        |                |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO0_D2/PWM0                      | U18    | GPIO0_D2  | PWM0           |                |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| CIF_PDN1/GPIO3_B3                  | Y20    | GPIO3_B3  |                |                |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_D3/PWM1                      | T17    | GPIO0_D3  | PWM1           |                |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO0_D4/PWM2                      | V14    | GPIO0_D4  | PWM2           |                |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO3_D2/IR                        | W18    | GPIO3_D2  | PWM_IRI<br>N   |                |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO3_D3/SPDIF                     | Y19    | GPIO3_D3  | SPDIF_TX       |                |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO2_D2/CARD_RST/UART0_TX         | T18    | GPIO2_D2  | CARD_RS<br>T   | UART0_T<br>X   |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO2_D3/CARD_CLK/UART0_RX         | Y17    | GPIO2_D3  | CARD_CL<br>K   | UART0_R<br>X   |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_C1/SDMMC0_DET                | W19    | GPIO1_C1  | SDMMC0<br>_DET |                |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO2_D4                           |        | GPIO2_D4  |                |                |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |

| Ball Name                           | Ball # | func1    | func2     | func3      | func4    | Func5 | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|-------------------------------------|--------|----------|-----------|------------|----------|-------|------------------|--------------|------------------|---------------------|----------------------|
| GPIO2_D5/CARD_DET/UART0_CTSN        | W20    | GPIO2_D5 | CARD_DET  | UART0_CTSN |          |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_C6/FLASH_CS2/EMMC_CMD         | U19    | GPIO1_C6 | FLASH_CS2 | EMMC_CMD   |          |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO2_A5/FLASH_WP/EMMC_PWR          | V19    | GPIO2_A5 | FLASH_WP  | EMMC_PWR   |          |       | I/O              | 8mA          | down             | I                   | GPIO                 |
| GPIO1_C7/FLASH_CS3/EMMC_RST         | P19    | GPIO1_C7 | FLASH_CS3 | EMMC_RST   |          |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_D0/FLASH_D0/EMMC_D0/SFC_SIO0  | P16    | GPIO1_D0 | FLASH_D0  | EMMC_D0    | SFC_SIO0 |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO1_D2/FLASH_D2/EMMC_D2/SFC_SIO2  | T19    | GPIO1_D2 | FLASH_D2  | EMMC_D2    | SFC_SIO2 |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO1_D1/FLASH_D1/EMMC_D1/SFC_SIO1  | U20    | GPIO1_D1 | FLASH_D1  | EMMC_D1    | SFC_SIO1 |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO1_D3/FLASH_D3/EMMC_D3/SFC_SIO3  | T20    | GPIO1_D3 | FLASH_D3  | EMMC_D3    | SFC_SIO3 |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO1_D4/FLASH_D4/EMMC_D4/SPI_RXD   | P18    | GPIO1_D4 | FLASH_D4  | EMMC_D4    | SPI_RXD  |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO1_D6/FLASH_D6/EMMC_D6/SPI_CSN0  | N15    | GPIO1_D6 | FLASH_D6  | EMMC_D6    | SPI_CSN0 |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO1_D5/FLASH_D5/EMMC_D5/SPI_TXD   | R19    | GPIO1_D5 | FLASH_D5  | EMMC_D5    | SPI_TXD  |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO1_D7/FLASH_D7/EMMC_D7/SPI_CSN1  | P17    | GPIO1_D7 | FLASH_D7  | EMMC_D7    | SPI_CSN1 |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO2_A0/FLASH_ALE/SPI_CLK          | N16    | GPIO2_A0 | FLASH_ALE |            | SPI_CLK  |       | I/O              | 8mA          | down             | I                   | GPIO                 |
| GPIO2_A1/FLASH_CLE                  | N17    | GPIO2_A1 | FLASH_CLE |            |          |       | I/O              | 8mA          | down             | I                   | GPIO                 |
| GPIO2_A2/FLASH_WRN/SFC_CSN0         | P20    | GPIO2_A2 | FLASH_WRN |            | SFC_CSN0 |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO2_A3/FLASH_RDN/SFC_CSN1         | L15    | GPIO2_A3 | FLASH_RDN |            | SFC_CSN1 |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO2_A4/FLASH_RDY/EMMC_CMD/SFC_CLK | K17    | GPIO2_A4 | FLASH_RDY | EMMC_CMD   | SFC_CLK  |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO2_A6/FLASH_CS0                  | L16    | GPIO2_A6 | FLASH_CS0 |            |          |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO2_A7/FLASH_DQS/EMMC_CLKO        | N19    | GPIO2_A7 | FLASH_DQS | EMMC_CLKO  |          |       | I/O              | 8mA          | up               | I                   | GPIO                 |
| GPIO0_C7/FLASH_CS1                  | L17    | GPIO0_C7 | FLASH_CS1 |            |          |       | I/O              | 4mA          | up               | I                   | GPIO                 |

| Ball Name                    | Ball # | func1    | func2       | func3     | func4 | Func5 | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|------------------------------|--------|----------|-------------|-----------|-------|-------|------------------|--------------|------------------|---------------------|----------------------|
| TEST                         | H15    |          |             |           |       |       | N/A              | N/A          | down             | I                   | GPIO                 |
| GPIO1_B6/SDMMC0_PWR          | N18    | GPIO1_B6 | SDMMC0_PWR  |           |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| NPOR                         | N20    |          |             |           |       |       | N/A              | N/A          | down             | I                   | MISC                 |
| GPIO1_C5/SDMMC0_D3/JTAG_TMS  | M19    | GPIO1_C5 | SDMMC0_D3   | JTAG_TMS  |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_C4/SDMMC0_D2/JTAG_TCK  | K16    | GPIO1_C4 | SDMMC0_D2   | JTAG_TCK  |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_C3/SDMMC0_D1/UART2_RX  | K15    | GPIO1_C3 | SDMMC0_D1   | UART2_RX  |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_C2/SDMMC0_D0/UART2_TX  | L18    | GPIO1_C2 | SDMMC0_D0   | UART2_TX  |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_A7/SDMMC0_WP           | L19    | GPIO1_A7 | SDMMC0_WP   |           |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO0_B6/I2S_SDI/SPI_CSN0    | K19    | GPIO0_B6 | I2S_SDI     | SPI_CSN0  |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO3_D7/CIF_PDN0/TEST_CLKO  | K18    | GPIO3_D7 | TEST_CLKO   |           |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO0_B5/I2S_SDO/SPI_RXD     | L20    | GPIO0_B5 | I2S_SDO     | SPI_RXD   |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_B4/I2S_LRCK_TX         | H16    | GPIO0_B4 | I2S_LRCK_TX |           |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_B3/I2S_LRCK_RX/SPI_TXD | J19    | GPIO0_B3 | I2S_LRCK_RX | SPI_TXD   |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_B1/I2S_SCLK/SPI_CLK    | K20    | GPIO0_B1 | I2S_SCLK    | SPI_CLK   |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_B0/I2S_MCLK            | H17    | GPIO0_B0 | I2S_MCLK    |           |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_C0/SDMMC0_CLKO         | H20    | GPIO1_C0 | SDMMC0_CLKO |           |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_B3/UART1_RTSN/SPI_CSNO | G18    | GPIO1_B3 | UART1_RTSN  | SPI_CSN0  |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_B2/UART1_RX/SPI_RXD    | H19    | GPIO1_B2 | UART1_RX    | SPI_RXD   |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_B1/UART1_TX/SPI_TXD    | H18    | GPIO1_B1 | UART1_TX    | SPI_TXD   |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_B0/UART1_CTSN/SPI_CLK  | G19    | GPIO1_B0 | UART1_CTSN  | SPI_CLK   |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO1_A5/I2S_SDI/SDMMC1_D3   | G17    | GPIO1_A5 | I2S_SDI     | SDMMC1_D3 |       |       | I/O              | 4mA          | down             | I                   | GPIO                 |

| Ball Name                              | Ball # | func1    | func2       | func3       | func4      | Func5 | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|----------------------------------------|--------|----------|-------------|-------------|------------|-------|------------------|--------------|------------------|---------------------|----------------------|
| GPIO1_A4/I2S_SDO/SDMMC1_D2             | G16    | GPIO1_A4 | I2S_SDO     | SDMMC1_D2   |            |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_A3/I2S_LRCK_TX                   | G15    | GPIO1_A3 | I2S_LRCK_TX |             |            |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_A2/I2S_LRCK_RX/SDMMC1_D1         | E19    | GPIO1_A2 | I2S_LRCK_RX | SDMMC1_D1   |            |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_A1/I2S_SCLK/SDMMC1_D0/PMIC_SLEEP | E18    | GPIO1_A1 | I2S_SCLK    | SDMMC1_D0   | PMIC_SLEEP |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_A0/I2S_MCLK/SDMMC1_CLKO/XIN_32K  | E20    | GPIO1_A0 | I2S_MCLK    | SDMMC1_CLKO | XIN_32K    |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_B7/SDMMC0_CMD                    | D18    | GPIO1_B7 | SDMMC0_CMD  |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_A3/I2C1_SDA/SDMMC1_CMD           | D17    | GPIO0_A3 | I2C1_SDA    | SDMMC1_CMD  |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_A1/I2C0_SDA                      | E17    | GPIO0_A1 | I2C0_SDA    |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_A2/I2C1_SCL                      | F19    | GPIO0_A2 | I2C1_SCL    |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_A0/I2C0_SCL                      | D20    | GPIO0_A0 | I2C0_SCL    |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_C4/HDMI_CEC                      | C19    | GPIO0_C4 | HDMI_CEC    |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_B7/HDMI_HPD                      | E13    | GPIO0_B7 | HDMI_HPD    |             |            |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO0_A6/HDMI_SCL/I2C3_SCL             | B20    | GPIO0_A6 | HDMI_SCL    | I2C3_SCL    |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_A7/HDMI_SDA/I2C3_SDA             | F14    | GPIO0_A7 | HDMI_SDA    | I2C3_SDA    |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO3_C7                               | G20    | GPIO3_C7 |             |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO3_C6                               | C18    | GPIO3_C6 |             |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO3_C5                               | F13    | GPIO3_C5 |             |             |            |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO3_C4                               | D19    | GPIO3_C4 |             |             |            |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO1_B4/SPI_CSN1                      | B19    | GPIO1_B4 | SPI_CSN1    |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_D6/SDMMC1_PWR                    | A20    | GPIO0_D6 | SDMMC1_PWR  |             |            |       | I/O              | 4mA          | down             | I                   | GPIO                 |
| GPIO0_D1/UART2_CTSN                    | A19    | GPIO0_D1 | UART2_CTSN  |             |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| GPIO0_D0/UART2_RTSN/PMIC_SLEEP         | C17    | GPIO0_D0 | UART2_RTSN  | PMIC_SLEEP  |            |       | I/O              | 4mA          | up               | I                   | GPIO                 |

| Ball Name                       | Ball # | func1    | func2   | func3          | func4 | Func5 | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|---------------------------------|--------|----------|---------|----------------|-------|-------|------------------|--------------|------------------|---------------------|----------------------|
| GPIO0_C1/CARD_IO/UART0_RT<br>SN | P15    | GPIO0_C1 | CARD_IO | UART0_R<br>TSN |       |       | I/O              | 4mA          | up               | I                   | GPIO                 |
| CODEC_MICL                      | E14    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_AIL                       | C16    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_VCM                       | A17    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_MICBIAS                   | B18    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_AIR                       | D16    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_MICR                      | E16    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_AOL                       | B17    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_AOMS                      | A16    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_AOM                       | B16    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_HPDET                     | C14    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| CODEC_AOR                       | B15    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | CODEC                |
| DDR_DQ18                        | B9     |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ16                        | A10    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQS2                        | A11    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQS2_N                      | B11    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ22                        | F10    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ20                        | E10    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ23                        | A13    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ21                        | B12    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ17                        | C11    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DM2                         | D11    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ19                        | E11    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ2                         | F11    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ0                         | A14    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQS0                        | A8     |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQS0_N                      | B8     |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ6                         | B13    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ4                         | B10    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ7                         | C8     |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ5                         | D10    |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DQ1                         | F8     |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_DM0                         | B7     |          |         |                |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |

| Ball Name | Ball # | func1 | func2 | func3 | func4 | Func5 | pad<br>①<br>type | Driving<br>② | Pull up<br>/down | Reset<br>State<br>③ | power<br>Domain<br>⑤ |
|-----------|--------|-------|-------|-------|-------|-------|------------------|--------------|------------------|---------------------|----------------------|
| DDR_DQ3   | A7     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A8    | D8     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A6    | F7     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A14   | B5     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A15   | A5     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A11   | C5     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A1    | A4     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A4    | A2     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A12   | B4     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_BA1   | E8     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_BA0   | D7     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A10   | C4     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_CKE   | B3     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_ODT0  | B2     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_CLK_N | C2     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_CLK   | B1     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_RASN  | E3     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_CASN  | E7     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_CSN1  | B6     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_CSN0  | A1     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_WEN   | D5     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_BA2   | D3     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |
| DDR_A3    | D2     |       |       |       |       |       | N/A              | NA/          | N/A              | N/A                 | DDR                  |

## Notes :

① : Pad types : I = input , O = output , I/O = input/output (bidirectional) ,

AP = Analog Power , AG = Analog Ground, DP = Digital Power , DG = Digital Ground, A = Analog

②\*Output Drive Unit is mA , only Digital IO have drive value

③\*Reset state : I = input without any pull resistor ,O = output without any pull resistor ,

④\*It is die location. For examples, "Left side" means that all the related IOs are always in left side of die

⑤\*Power supply means that all the related IOs is in these IO power domain. If multiple powers is included, they are connected together in one IO power ring,H = 5 V tolerant

### 2.5.3 IO pin name descriptions

This sub-chapter will focus on the detailed function description of every pins based on different interface.

Table 2-3 PX3 SE IO function description list

| Interface | Pin Name | Direction | Description                   |
|-----------|----------|-----------|-------------------------------|
| Misc      | XIN24M   | I         | Clock input of 24MHz crystal  |
|           | XOUT24M  | O         | Clock output of 24MHz crystal |
|           | NPOR     | I         | Power on reset for chip       |

| Interface | Pin Name | Direction | Description                                          |
|-----------|----------|-----------|------------------------------------------------------|
| Debug     | TCK      | I         | JTAG interface clock input/SWD interface clock input |
|           | TMS      | I/O       | JTAG interface TMS input/SWD interface data out      |

| Interface              | Pin Name                             | Direction | Description                                                         |
|------------------------|--------------------------------------|-----------|---------------------------------------------------------------------|
| SD/MMC Host Controller | sdmmc_clkout                         | O         | sdmmc card clock.                                                   |
|                        | sdmmc_cmd                            | I/O       | sdmmc card command output and reponse input.                        |
|                        | sdmmc_data <i>i</i> ( <i>i</i> =0~3) | I/O       | sdmmc card data input and output.                                   |
|                        | sdmmc_detect_n                       | I         | sdmmc card detect signal, a 0 represents presence of card.          |
|                        | sdmmc_write_prt                      | I         | sdmmc card write protect signal, a 1 represents write is protected. |
|                        | sdmmc_rstn_out                       | O         | sdmmc card reset signal                                             |
|                        | sdmmc_pwr_en                         | O         | sdmmc card power-enable control signal                              |

| Interface            | Pin Name                            | Direction | Description                                                        |
|----------------------|-------------------------------------|-----------|--------------------------------------------------------------------|
| SDIO Host Controller | sdio_clkout                         | O         | sdio card clock.                                                   |
|                      | sdio_cmd                            | I/O       | sdio card command output and reponse input.                        |
|                      | sdio_data <i>i</i> ( <i>i</i> =0~3) | I/O       | sdio card data input and output.                                   |
|                      | sdio_detect_n                       | I         | sdio card detect signal, a 0 represents presence of card.          |
|                      | sdio_write_prt                      | I         | sdio card write protect signal, a 1 represents write is protected. |
|                      | sdio_pwr_en                         | O         | sdio card power-enable control signal                              |
|                      | sdio_int_n                          | O         | sdio card interrupt indication                                     |
|                      | sdio_backend                        | O         | the back-end power supply for embedded device                      |

| Interface      | Pin Name    | Direction | Description                                 |
|----------------|-------------|-----------|---------------------------------------------|
| eMMC Interface | emmc_clkout | O         | emmc card clock.                            |
|                | emmc_cmd    | I/O       | emmc card command output and reponse input. |

| Interface | Pin Name                               | Direction | Description                           |
|-----------|----------------------------------------|-----------|---------------------------------------|
|           | emmc_data <i>i</i><br>( <i>i</i> =0~7) | I/O       | emmc card data input and output.      |
|           | emmc_pwr_en                            | O         | emmc card power-enable control signal |
|           | emmc_rstn_out                          | O         | emmc card reset signal                |

| Interface | Pin Name                       | Direction | Description                                                                     |
|-----------|--------------------------------|-----------|---------------------------------------------------------------------------------|
| DMC       | CLK                            | O         | Active-high clock signal to the memory device.                                  |
|           | CLK_N                          | O         | Active-low clock signal to the memory device.                                   |
|           | CKE                            | O         | Active-high clock enable signal to the memory device                            |
|           | CSN <i>i</i> ( <i>i</i> =0,1)  | O         | Active-low chip select signal to the memory device. AThere are two chip select. |
|           | RASN                           | O         | Active-low row address strobe to the memory device.                             |
|           | CASN                           | O         | Active-low column address strobe to the memory device.                          |
|           | WEN                            | O         | Active-low write enable strobe to the memory device.                            |
|           | BA <i>i</i> ( <i>i</i> =0,1,2) | O         | Bank address signal to the memory device.                                       |
|           | A <i>i</i> ( <i>i</i> =0~15)   | O         | Address signal to the memory device.                                            |
|           | DQ <i>i</i> ( <i>i</i> =0~31)  | I/O       | Bidirectional data line to the memory device.                                   |
|           | DQS0<br>DQS1<br>DQS2           | I/O       | Active-high bidirectional data strobes to the memory device.                    |
|           | DQS0_N<br>DQS1_N<br>DQS2_N     | I/O       | Active-low bidirectional data strobes to the memory device.                     |
|           | DM <i>i</i> ( <i>i</i> =0~3)   | O         | Active-low data mask signal to the memory device.                               |
|           | ODT <i>i</i> ( <i>i</i> =0,1)  | O         | On-Die Termination output signal for two chip select.                           |
|           | RESETN                         | O         | DDR3 reset signal to the memory device                                          |

| Interface | Pin Name                               | Direction | Description                               |
|-----------|----------------------------------------|-----------|-------------------------------------------|
| NandC     | flash_wp                               | O         | Flash write-protected signal              |
|           | flash_ale                              | O         | Flash address latch enable signal         |
|           | flash_cle                              | O         | Flash command latch enable signal         |
|           | flash_wrn                              | O         | Flash write enable and clock signal       |
|           | flash_rdn                              | O         | Flash read enable and write/read signal   |
|           | flash_data[ <i>i</i> ]( <i>i</i> =0~7) | I/O       | 8bits of flash data inputs/outputs signal |
|           | flash_dqs                              | I/O       | Flash data strobe signal                  |

| Interface | Pin Name                 | Direction | Description                                     |
|-----------|--------------------------|-----------|-------------------------------------------------|
|           | flash_rdy                | I         | Flash ready/busy signal                         |
|           | flash_csni( $i=0\sim3$ ) | O         | Flash chip enable signal for chip i, $i=0\sim3$ |

| Interface                      | Pin Name    | Direction | Description                                                                                                                                                                      |
|--------------------------------|-------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I2S/PCM Controller (8 channel) | i2s_clk     | O         | I2S/PCM clock source                                                                                                                                                             |
|                                | i2s_sclk    | I/O       | I2S/PCM serial clock                                                                                                                                                             |
|                                | i2s_lrck_rx | I/O       | I2S/PCM left & right channel signal for receiving serial data, synchronous left & right channel in I2S mode and the beginning of a group of left & right channels in PCM mode    |
|                                | i2s_sdi     | I         | I2S/PCM serial data input                                                                                                                                                        |
|                                | i2s_sdo     | O         | I2S/PCM serial data output                                                                                                                                                       |
|                                | i2s_lrck_tx | I/O       | I2S/PCM left & right channel signal for transmitting serial data, synchronous left & right channel in I2S mode and the beginning of a group of left & right channels in PCM mode |

| Interface      | Pin Name             | Direction | Description                        |
|----------------|----------------------|-----------|------------------------------------|
| SPI Controller | spi_clk              | I/O       | spi serial clock                   |
|                | spi_csny ( $y=0,1$ ) | I/O       | spi chip select signal, low active |
|                | spi_txd              | O         | spi serial data output             |
|                | spi_rxd              | I         | spi serial data input              |

| Interface | Pin Name        | Direction | Description                                                           |
|-----------|-----------------|-----------|-----------------------------------------------------------------------|
| LCD       | lcdc_dclk       | O         | LDC RGB interface display clock out, MCU i80 interface RS signal      |
|           | lcdc_vsync      | O         | LDC RGB interface vertical sync pulse, MCU i80 interface CSN signal   |
|           | lcdc_hsync      | O         | LDC RGB interface horizontal sync pulse, MCU i80 interface WEN signal |
|           | lcdc_den        | O         | LDC RGB interface data enable, MCU i80 interface REN signal           |
|           | lcdc_data[23:0] | I/O       | LDC data output/input                                                 |

| Interface | Pin Name   | Direction | Description                             |
|-----------|------------|-----------|-----------------------------------------|
| Camera IF | cif_clkin  | I         | Camera interface input pixel clock      |
|           | cif_clkout | O         | Camera interface output work clock      |
|           | cif_vsync  | I         | Camera interface vertical sync signal   |
|           | cif_href   | I         | Camera interface horizontal sync signal |

| Interface | Pin Name      | Direction | Description                             |
|-----------|---------------|-----------|-----------------------------------------|
|           | cif_data[7:0] | I         | Camera interface 8-bit input pixel data |

| Interface | Pin Name | Direction | Description         |
|-----------|----------|-----------|---------------------|
| GPS       | gps_sign | I         | GPS sign data input |
|           | gps_mag  | I         | GPS mag data input  |
|           | gps_clk  | I         | GPS rf clock input  |

| Interface | Pin Name | Direction | Description                   |
|-----------|----------|-----------|-------------------------------|
| PWM       | Pwm2     | O         | Pulse Width Modulation output |
|           | pwm1     | O         | Pulse Width Modulation output |
|           | pwm0     | O         | Pulse Width Modulation output |

| Interface | Pin Name | Direction | Description |
|-----------|----------|-----------|-------------|
| I2C       | i2c0_sda | I/O       | I2C0 data   |
|           | i2c0_scl | I/O       | I2C0 clock  |
|           | i2c1_sda | I/O       | I2C1 data   |
|           | i2c1_scl | I/O       | I2C1 clock  |
|           | i2c2_sda | I/O       | I2C2 data   |
|           | i2c2_scl | I/O       | I2C2 clock  |
|           | i2c3_sda | I/O       | I2C3 data   |
|           | i2c3_scl | I/O       | I2C3 clock  |

| Interface | Pin Name    | Direction | Description               |
|-----------|-------------|-----------|---------------------------|
| UART      | uart0_sin   | I         | UART0 searial data input  |
|           | uart0_sout  | O         | UART0 searial data output |
|           | uart0_cts_n | I         | UART0 clear to send       |
|           | uart0_rts_n | O         | UART0 request to send     |
|           | uart1_sin   | I         | UART1 searial data input  |
|           | uart1_sout  | O         | UART1 searial data output |
|           | uart1_cts_n | O         | UART1 clear to send       |
|           | uart1_rts_n | I         | UART1 request to send     |
|           | uart2_sin   | I         | UART2 searial data input  |
|           | uart2_sout  | O         | UART2 searial data output |

| Interface            | Pin Name     | Direction | Description                          |
|----------------------|--------------|-----------|--------------------------------------|
| USB OTG2.0 /HOST 2.0 | USB0PP       | I/O       | USB OTG 2.0 Data signal DP           |
|                      | USB0PN       | I/O       | USB OTG 2.0 Data signal DM           |
|                      | VBUS_0       | N/A       | USB OTG 2.0 5V power supply pin      |
|                      | USB0ID       | I         | USB OTG 2.0 ID indicator             |
|                      | otg_drv_vbus | O         | USB OTG 2.0 drive VBUS               |
|                      | USB1PP       | I/O       | USB HOST 2.0 Data signal DP          |
|                      | USB1PN       | I/O       | USB HOST 2.0 Data signal DM          |
|                      | VBUS_1       | N/A       | USB HOST 2.0 5V power supply pin     |
|                      | USB1ID       | I         | USB HOST 2.0 ID indicator            |
|                      | USBRBIAS     | N/A       | 45 Ohm Reference external resistance |

| Interface   | Pin Name | Direction | Description                                 |
|-------------|----------|-----------|---------------------------------------------|
| Audio Codec | MICL     | I         | Left channel microphone PGA positive input  |
|             | LINEL    | I         | Left channel line-in input                  |
|             | VCM      | I         | Decoupling for voltage reference            |
|             | VREF_MIC | O         | Microphone bias voltage output              |
|             | LINER    | I         | Right channel line-in input                 |
|             | MICR     | I         | Right channel microphone PGA positive input |
|             | VOU TL   | O         | Left channel DAC driver amplifier output    |
|             | VOU TR   | O         | Right channel DAC driver amplifier output   |
|             | AOMS     | I         | Headphone virtual ground feedback           |
|             | AOM      | O         | Headphone virtual ground output             |
|             | HPDET    |           | Headphone jack detection                    |

| Interface | Pin Name | Direction | Description                                                      |
|-----------|----------|-----------|------------------------------------------------------------------|
| HDMI      | EXTR     | O         | Connect 2.0Kohm resistor to ground to generate reference current |
|           | TX3N     | O         | TMDS negative clock line                                         |
|           | TX3P     | O         | TMDS positive clock line                                         |
|           | TX0N     | O         | TMDS channel 0 negative data line                                |
|           | TX0P     | O         | TMDS channel 0 positive data line                                |
|           | TX1N     | O         | TMDS channel 1 negative data line                                |
|           | TX1P     | O         | TMDS channel 1 positive data line                                |
|           | TX2N     | O         | TMDS channel 2 negative data line                                |
|           | TX2P     | O         | TMDS channel 2 positive data line                                |

| Interface | Pin Name                 | Direction | Description                        |
|-----------|--------------------------|-----------|------------------------------------|
| SAR-ADC   | SARADC_AIN[i]<br>(i=0~2) | N/A       | SAR-ADC input signal for 3 channel |







| Interface | Pin Name | Direction | Description                   |
|-----------|----------|-----------|-------------------------------|
| eFuse     | EFUSE_VP | N/A       | eFuse program and sense power |

## 2.5.4 PX3 SE IO Type

The following list shows IO type except DDR IO and all of Power/Ground IO .

Table 2-4 PX3 SE IO Type List

| Type | Diagram                                                                             | Description                    | Pin Name |
|------|-------------------------------------------------------------------------------------|--------------------------------|----------|
| A    |  | Analog IO Cell with IO voltage | EFUSE_VP |
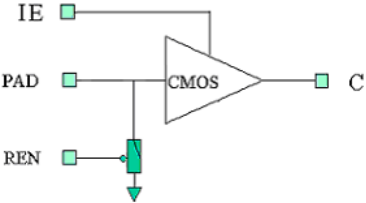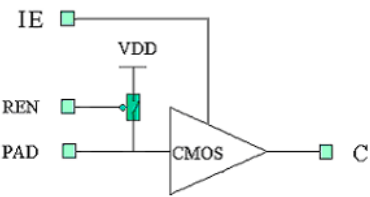
| Type | Diagram                                                                             | Description                                                               | Pin Name                        |
|------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------|---------------------------------|
| B    |    | Dedicated Power supply to Internal Macro with IO voltage                  | SARADC_AIN[2:0]                 |
| C    |    | Crystal Oscillator with internal register                                 | XIN24M/XOUT24M                  |
| D    |    | CMOS 3-state output pad with controllable input and controllable pulldown | Part of digital GPIO (PBCDxRNC) |
| E    |   | CMOS 3-state output pad with controllable input and controllable pullup   | Part of digital GPIO (PBCUxRNC) |
| F    |  | controllable input pad with controllable pulldown                         | Part of digital GPIO (PICDRNC)  |
| G    |  | controllable input pad with controllable pullup                           | Part of digital GPIO (PICURNc)  |

## Chapter 3 Electrical Specification

### 3.1 Absolute Maximum Ratings

Table 3-1 PX3 SE absolute maximum ratings

| Parameters                                                                | Related Power Group                     | Max            | Unit |
|---------------------------------------------------------------------------|-----------------------------------------|----------------|------|
| DC supply voltage for Internal digital logic                              | AVDD,CVDD,                              | TBD            | V    |
| DC supply voltage for Internal digital logic                              | USB_DVDD11,HDMI_DVDD1V1_1               | 1.21           | V    |
| DC supply voltage for Digital GPIO (except for SAR-ADC, PLL, USB, DDR IO) | VCCIO1,VCCIO2,VCCIO3,VCCIO4             | 3.6            | V    |
| DC supply voltage for DDR IO                                              | DDR_VDD                                 | 1.95           | V    |
| DC supply voltage for Analog part of SAR-ADC                              | SAR_AVDD33                              | 3.6            | V    |
| DC supply voltage for Analog part of PLL                                  | PLL_VCCIO<br>A/DPLL_DVDD11,C/GPLL_DVD11 | 3.3<br>1.21    | V    |
| DC supply voltage for Analog part of USB OTG/Host2.0                      | USB_AVDD33                              | 3.63           | V    |
| DC supply voltage for Analog part of HDMI                                 | HDMI_AVDD33                             | 3.63           | V    |
| DC supply voltage for Analog part of Acodec                               | CODEC_AVDD                              | 3.63           | V    |
| Analog Input voltage for SAR-ADC                                          |                                         | SAR_A<br>VDD33 | V    |
|                                                                           |                                         |                |      |
| Digital input voltage for input buffer of GPIO                            |                                         | 3.6            | V    |
| Digital output voltage for output buffer of GPIO                          |                                         | 3.6            | V    |
| Storage Temperature                                                       | Tstg                                    | 125            | °C   |
| Max Conjunction Temperature                                               | Tj                                      | 125            | °C   |

Absolute maximum ratings specify the values beyond which the device may be damaged permanently. Long-term exposure to absolute maximum ratings conditions may affect device reliability.

### 3.2 Recommended Operating Conditions

Table 3-2 PX3 SE recommended operating conditions

| Parameters                   | Symbol                        | Min  | Typ | Max  | Units |
|------------------------------|-------------------------------|------|-----|------|-------|
| Internal digital logic Power | AVDD,CVDD,                    | TBD  | 1.1 | TBD  | V     |
| Max frequency of CPU         |                               |      |     | 1200 | GHz   |
| Max frequency of GPU         |                               |      |     | 400  | MHz   |
| Internal digital logic Power | USB_DVDD11,HD<br>MI_DVDD1V1_1 | 0.99 | 1.1 | 1.21 | V     |

| Parameters                         | Symbol                          | Min   | Typ            | Max   | Units |
|------------------------------------|---------------------------------|-------|----------------|-------|-------|
| Digital GPIO Power(3.3V)           | VCCIO1,VCCIO2,<br>VCCIO3,VCCIO4 | 2.97  | 3.3            | 3.63  | V     |
| DDR IO (DDRIII mode) Power         | DDR_VDD                         | 1.425 | 1.5            | 1.575 | V     |
| DDR IO (LVDDRIII mode) Power       | DDR_VDD                         | 1.28  | 1.35           | 1.45  | V     |
| PLL Analog Power                   | PLL_VCCIO                       | 2.97  | 3.3            | 3.63  | V     |
| PLL Analog Power                   | A/DPLL_DVDD11,<br>C/GPLL_DVDD11 | 0.99  | 1.1            | 1.21  | V     |
| SAR-ADC Analog Power               | SAR_AVDD33                      | 2.97  | 3.3            | 3.63  | V     |
| SAR-ADC external reference Power   | VREF                            |       | SAR_A<br>VDD33 |       |       |
| USB OTG/Host2.0 Analog Power(3.3V) | USB_AVDD33                      | 2.97  | 3.3            | 3.63  | V     |
| USB OTG/Host2.0 external resistor  | REXT                            | 130.5 | 135            | 139.5 | Ohm   |
| Acodect Analog Power               | CODEC_AVDD                      | 2.97  | 3.3            | 3.63  | V     |
| HDMI Analog Power                  | HDMI_AVDD33                     | 2.97  | 3.3            | 3.63  | V     |
| TV EncoderAnalog Power             | ADDHV6                          | 2.97  | 3.3            | 3.63  | V     |
| EFUSE programming voltage          |                                 | N/A   | 2.5            | N/A   | V     |
| PLL input clock frequency          |                                 | N/A   | 24             | N/A   | MHz   |

Notes : ①Symbol name is same as the pin name in the io descriptions

### 3.3 DC Characteristics

Table 3-3 PX3 SE DC Characteristics

| Table 3-5 Pin 32-33 Characteristics |                                          |         |                            |                 |                           |       |
|-------------------------------------|------------------------------------------|---------|----------------------------|-----------------|---------------------------|-------|
|                                     | Parameters                               | Symbol  | Min                        | Typ             | Max                       | Units |
| Digital GPIO @3.3V                  | Input Low Voltage                        | Vil     | -0.3                       | 0               | 0.8                       | V     |
|                                     | Input High Voltage                       | Vih     | 2                          | 3.3             | 3.6                       | V     |
|                                     | Output Low Voltage                       | Vol     | N/A                        | 0               | 0.4                       | V     |
|                                     | Output High Voltage                      | Voh     | 2.4                        | 3.3             | N/A                       | V     |
|                                     | Threshold Point                          | Vt      | 1.21                       | 1.42            | 1.64                      | V     |
|                                     | Schmitt trig Low to High threshold point | Vt+     | 1.36                       | 1.6             | 1.86                      | V     |
|                                     | Schmitt trig High to Low threshold point | Vt-     | 0.93                       | 1.09            | 1.3                       | V     |
|                                     | Pullup Resistor                          | Rpu     | 33                         | 41              | 62                        | Kohm  |
|                                     | Pulldown Resistor                        | Rpd     | 33                         | 42              | 68                        | Kohm  |
| DDR IO @DDR3 mode                   | Input High Voltage                       | Vih_dds | VREFi + 0.125 (i=0~2)      | 1.5             | VDDIO_D DRi + 0.3 (i=0~6) | V     |
|                                     | Input Low Voltage                        | Vil_dds | -0.3                       | 0               | VREFi - 0.125 (i=0~2)     | V     |
|                                     | Output High Voltage                      | Voh_dds | VDDIO_D DRi - 0.28 (i=0~6) | 1.5             | N/A                       | V     |
|                                     | Output Low Voltage                       | Vol_dds | N/A                        | 0               | 0.28                      | V     |
|                                     | Input termination resistance(ODT) to     | Rtt     | 120<br>60<br>40            | 150<br>75<br>50 | 180<br>90<br>60           | Ohm   |

|                           | Parameters                                                              | Symbol  | Min                        | Typ | Max                       | Units |
|---------------------------|-------------------------------------------------------------------------|---------|----------------------------|-----|---------------------------|-------|
|                           | VDDIO_DDRi/2<br>(i=0~6)                                                 |         |                            |     |                           |       |
| DDR IO<br>@LPDDR2<br>mode | Input High Voltage                                                      | Vih_dds | 0.7*VDDIO_DDRi<br>(i=0~6)  | 1.2 | N/A                       | V     |
|                           | Input Low Voltage                                                       | Vil_dds | N/A                        | 0   | 0.3*VDDIO_DDRi<br>(i=0~6) | V     |
| HDMI                      | single-ended high level<br>output voltage, VH(when sink<br>≤165MHz)     | Voh     | HDMI_AV<br>DD33-<br>10mv   | N/A | HDMI_AV<br>DD33+10<br>mv  | mV    |
|                           | single-ended high level<br>output voltage, VH(when sink ><br>165MHz)    | Voh     | HDMI_AV<br>DD33-<br>200mv  | N/A | HDMI_AV<br>DD33+10<br>mv  | mV    |
|                           | single-ended low level<br>output voltage, VL<br>(when sink ≤<br>165MHz) | Vol     | HDMI_AV<br>DD33 -<br>600mv | N/A | HDMI_AV<br>DD33-<br>400mv | mV    |
|                           | single-ended low level<br>output voltage, VL<br>(when sink > 165MHz)    | Vol     | HDMI_AV<br>DD33-<br>700mv  | N/A | HDMI_AV<br>DD33-<br>400mv | mv    |
|                           | single-ended output<br>swing voltage, Vswing                            | Vswing  | 400                        | N/A | 600                       | mV    |
|                           | single-ended standby<br>(off) output voltage,                           | Voff    | HDMI_AV<br>DD33 -<br>10mv  | N/A | HDMI_AV<br>DD33+10<br>mv  | mv    |
|                           | single-ended standby<br>(off) output current                            | Ioff    | -10                        | N/A | 10                        | uA    |

### 3.4 Recommended Operating Frequency

Table 3-4 Recommended operating frequency for PLL and oscillator domain

| Parameter      | Condition      | Symbol          | MIN | TYP | MAX  | Unit |
|----------------|----------------|-----------------|-----|-----|------|------|
| XIN Oscillator | 3.3V , 25 °C   | XIN24M          | 24  | 24  | 24   | MHz  |
|                | 3.6V , -40 °C  |                 | 24  | 24  | 24   |      |
|                | 3.0V , 125 °C  |                 | 24  | 24  | 24   |      |
| DDR PLL        | 1.1V , 25 °C   | dds_pll_clk     | N/A | N/A | 1050 | MHz  |
|                | 1.21V , -40 °C |                 | N/A | N/A | 1176 |      |
|                | 0.99V , 125 °C |                 | N/A | N/A | 950  |      |
| ARM PLL        | 1.1V , 25 °C   | arm_pll_clk     | N/A | N/A | 1086 | MHz  |
|                | 1.21V , -40 °C |                 | N/A | N/A | 1176 |      |
|                | 0.99V , 125 °C |                 | N/A | N/A | 850  |      |
| CODEC PLL      | 1.1V , 25 °C   | coccc_pll_clk   | N/A | N/A | 880  | MHz  |
|                | 1.21V , -40 °C |                 | N/A | N/A | 1000 |      |
|                | 0.99V , 125 °C |                 | N/A | N/A | 770  |      |
| GENERAL PLL    | 1.1V , 25 °C   | general_pll_clk | N/A | N/A | 900  | MHz  |

| Parameter | Condition      | Symbol | MIN | TYP | MAX | Unit |
|-----------|----------------|--------|-----|-----|-----|------|
|           | 1.21V , -40 °C |        | N/A | N/A | 940 |      |
|           | 0.99V , 125 °C |        | N/A | N/A | 780 |      |

### 3.5 Electrical Characteristics for General IO

Table 3-5 PX3 SE Electrical Characteristics for Digital General IO

| Parameters               |                                  | Symbol          | Test condition                            | Min | Typ | Max | Units |
|--------------------------|----------------------------------|-----------------|-------------------------------------------|-----|-----|-----|-------|
| Digital<br>GPIO<br>@3.3V | Input leakage current            | I <sub>I</sub>  | V <sub>in</sub> = 3.3V or 0V              | -1  | N/A | 1   | uA    |
|                          | Tri-state output leakage current | I <sub>oz</sub> | V <sub>out</sub> = 3.3V or 0V             | -1  | N/A | 1   | uA    |
|                          | High level input current         | I <sub>ih</sub> | V <sub>in</sub> = 3.3V, pulldown disabled | TBD | N/A | TBD | uA    |
|                          |                                  |                 | V <sub>in</sub> = 3.3V, pulldown enabled  | TBD | TBD | TBD | uA    |
|                          | Low level input current          | I <sub>il</sub> | V <sub>in</sub> = 0V, pullup disabled     | TBD | N/A | TBD | uA    |
|                          |                                  |                 | V <sub>in</sub> = 0V, pullup enabled      | TBD | TBD | TBD | uA    |

### 3.6 Electrical Characteristics for PLL

Table 3-6 PX3 SE Electrical Characteristics for PLL

| Table 5-10 PLL Electrical Characteristics for PLL |                                         |        |                                                                     |      |      |      |        |
|---------------------------------------------------|-----------------------------------------|--------|---------------------------------------------------------------------|------|------|------|--------|
| Parameters                                        |                                         | Symbol | Test condition                                                      | Min  | Typ  | Max  | Units  |
| PLL                                               | Input clock frequency                   | Fin    | Fin = FREF @3.3V/1.1V①                                              | 1/10 | 24   | 800  | MHz    |
|                                                   | Comparison frequency                    | Fref   | FREF = Fin/REFDIV @3.3V/1.1V                                        | 1    | N/A  | 40   | MHz    |
|                                                   | VCO operating range                     | Fvco   | Fvco = Fref * FBDIV① @3.3V/1.1V                                     | 400  | N/A  | 1600 | MHz    |
|                                                   | Output clock frequency                  | Fout   | Fout = Fvco/POSTDIV① @3.3V/1.1V                                     | 1    | N/A  | 1600 | MHz    |
|                                                   | Lock time②                              | Tlt    | @ 3.3V/1.1V, FREF=24M,REFDIV=1                                      | N/A  | 41.7 | 62.5 | us     |
|                                                   | VDDHV Power consumption ③ (normal mode) | N/A    | Fvco = 1000MHz, @3.3V, 25 ℃                                         | N/A  | 1    | 1.2  | mA     |
|                                                   | VDD Power consumption (normal mode)     | N/A    | @3.3V/1.1V, 25 ℃                                                    | N/A  | 3    | 4    | uW/MHz |
|                                                   | Power consumption (bypass mode)         | N/A    | BYPASS=HIGH , PD= LOW , Fin = 24MHz, Fout = 24MHz, @3.3V/1.1V, 25 ℃ | N/A  | N/A  | N/A  | uW     |
|                                                   | Power consumption (power-down mode)     | N/A    | PD=HIGH, @27 ℃                                                      | N/A  | 10   | N/A  | uA     |

Notes :

①:REFDIV is the input divider value;

FBDIV is the feedback divider value;

POSTDIV is the output divider value

@Lock Time is 1000cycles of input clocks in typ, and 1500cycles of input clocks in max.

@Current scale as  $(F_{vco}/1\text{GHz})^{1.5}$

### 3.7 Electrical Characteristics for SAR-ADC

Table 3-7 PX3 SE Electrical Characteristics for SAR-ADC

| Parameters                              | Symbol  | Test condition               | Min                     | Typ                   | Max                     | Units       |
|-----------------------------------------|---------|------------------------------|-------------------------|-----------------------|-------------------------|-------------|
| ADC resolution                          |         |                              | N/A                     | 10                    | N/A                     | bits        |
| Conversion speed                        | Fs      |                              | N/A                     | N/A                   | N/A                     | MSPS        |
| Differential Non Linearity              | DNL     |                              | N/A                     | N/A                   | N/A                     | LSB         |
| Integral Non Linearity                  | INL     |                              | N/A                     | N/A                   | N/A                     | LSB         |
| Gain Error                              | Egain   |                              | N/A                     | N/A                   | N/A                     | %FS         |
| Offset Error                            | Eoffset |                              | N/A                     | N/A                   | N/A                     | %FS         |
| Input Range                             | CH[2:0] | 3-channel single-ended input | 0.01*<br>SAR_A<br>VDD33 | N/A                   | 0.99*<br>SAR_AVD<br>D33 | V           |
| Input Resistance                        | RIN     |                              | N/A                     | N/A                   | N/A                     | K $\Omega$  |
| Input Capacitance                       | CIN     |                              | N/A                     | 1                     | N/A                     | pF          |
| Sampling Clock                          |         |                              | N/A                     | 200                   | N/A                     | KHz         |
| Main Clock Frequency                    | CLK     |                              | N/A                     | 2.2                   | N/A                     | MHz         |
| Data Latency                            |         |                              | N/A                     | 11                    | N/A                     | Clock Cycle |
| SNR plus Distortion(Up to 5th harmonic) | SINAD   | Fin=10K<br>Fin=99K           | N/A                     | 61.49<br>60.58        | N/A                     | dB          |
| Spurious-Free Dynamic Range             | SFDR    | Fin=10K<br>Fin=99K           | N/A                     | 66.29<br>67.14        | N/A                     | dB          |
| Second-Harmonic Distortion              | 2HD     | Fin=10K<br>Fin=99K           | N/A                     | -72.64<br>-69.94      | N/A                     | dB          |
| Third-Harmonic Distortion               | 3HD     | Fin=10K<br>Fin=99K           | N/A                     | -74.79<br>-68.85      | N/A                     | dB          |
| Effective Number of Bits                | ENOB    | Fin=10K<br>Fin=99K           | N/A                     | 9.92<br>9.77          | N/A                     | Bits        |
| Positive Reference                      | VREF    |                              |                         | SARAD<br>C_AVD<br>D33 |                         | V           |
| Analog Supply Current(SARADC_VDDA)      |         |                              | N/A                     | N/A                   | 200                     | $\mu$ A     |
| Digital Supply Current                  |         |                              | N/A                     | N/A                   | 50                      | $\mu$ A     |
| Reference Supply Current                |         |                              | N/A                     | N/A                   | 50                      | $\mu$ A     |
| Power Down Current                      |         |                              | N/A                     | N/A                   | N/A                     | $\mu$ A     |
| Power up time                           |         |                              | N/A                     | N/A                   | N/A                     | 1/Fs        |

### 3.8 Electrical Characteristics for USB OTG/Host2.0 Interface

Table 3-8 PX3 SE Electrical Characteristics for USB OTG/Host2.0 Interface

| Parameters                                                |                         | Test condition                         | Min | Typ  | Max | Units |
|-----------------------------------------------------------|-------------------------|----------------------------------------|-----|------|-----|-------|
| HS transmit,(quiescent supply current; Vin=0 or 1)        | Current From USB_AVDD33 | USB_AVDD33 = 3.3V<br>USB_DVDD12 = 1.1V | N/A | N/A  | 0.1 | mA    |
|                                                           | Current From USB_DVDD11 |                                        | N/A | N/A  | 20  | mA    |
| Classic mode active(quiescent supply current; Vin=0 or 1) | Current From USB_AVDD33 |                                        | N/A | N/A  | 0.5 | mA    |
|                                                           | Current From USB_DVDD11 |                                        | N/A | N/A  | 0.5 | mA    |
| HS mode(CL=10pF) Active supply current                    | Current From USB_AVDD33 |                                        | N/A | 0.1  | N/A | mA    |
|                                                           | Current From USB_DVDD11 |                                        | N/A | 2.22 | N/A | mA    |
| FS transmit,(CL=50pF) Active supply current               | Current From USB_AVDD33 |                                        | N/A | 10   | 30  | mA    |
|                                                           | Current From USB_DVDD11 |                                        | N/A | 5    | 10  | mA    |
| LS transmit(CL=50 to 350pF) Active supply current         | Current From USB_AVDD33 |                                        | N/A | 2    | 25  | mA    |
|                                                           | Current From USB_DVDD11 |                                        | N/A | 2    | 5   | mA    |
| Suspend mode                                              | Current From USB_AVDD33 |                                        | N/A | N/A  | 50  | uA    |
|                                                           | Current From USB_DVDD11 |                                        | N/A | N/A  | 5   | uA    |

### 3.9 Electrical Characteristics for HDMI

Table 3-9 PX3 SE Electrical Characteristics for HDMI

|  | Parameters                                    | Symbol      | Test condition | Min                                          | Typ | Max        | Units |
|--|-----------------------------------------------|-------------|----------------|----------------------------------------------|-----|------------|-------|
|  | rise time/fall time(20%-80%)                  | Tfall/Trise |                | 75                                           | N/A | 0.4Tbit    | ps    |
|  | overshoot, max                                |             |                | 15% of full differential amplitude(Vswing*2) |     |            | ps    |
|  | undershoot, max                               |             |                | 25% of full differential amplitude(Vswing*2) |     |            | ps    |
|  | Intra-pair skew at transmitter connector, max |             |                | N/A                                          | N/A | 0.15 Tbit  | ps    |
|  | inter-pair skew at transmitter connector, max |             |                | N/A                                          | N/A | 0.2 Tpixel | ps    |
|  | TMDS Differential clock jitter, max           |             |                | N/A                                          | N/A | 0.25 Tbit  | ps    |
|  | clock duty cycle                              |             |                | 40%                                          | N/A | 60%        |       |

### 3.10 Electrical Characteristics for DDR IO

Table 3-10 PX3 SE Electrical Characteristics for DDR IO

| Parameters         |                                                | Symbol | Test condition  | Min | Typ | Max | Units |
|--------------------|------------------------------------------------|--------|-----------------|-----|-----|-----|-------|
| DDR IO @DDR3 mode  | DDR IO power standby current, ODT OFF          |        | @ 1.5V , 125°C  | N/A | N/A | N/A | uA    |
|                    | Input leakage current, SSTL mode, unterminated |        | @ 1.5V , 125°C  | N/A | N/A | N/A | uA    |
| DDR IO @DDR3L mode | Input leakage current                          |        | @ 1.35V , 125°C | N/A | N/A | N/A | uA    |
|                    | DDR IO power quiescent current                 |        | @ 1.35V , 125°C | N/A | N/A | N/A | uA    |

### 3.11 Electrical Characteristics for eFuse

Table 3-11 PX3 SE Electrical Characteristics for eFuse

|                      | Parameters           | Symbol   | Test condition | Min | Typ  | Max | Units |
|----------------------|----------------------|----------|----------------|-----|------|-----|-------|
| Active mode          | read current         | Iactive  | STROBE high    | N/A | 2.53 | N/A | mA    |
| standby mode         | standby current      | Istandby |                | N/A | 0.4  | N/A | uA    |
| power-down mode      | power-down current   | Ipd_vdd  |                | N/A | N/A  | N/A | uA    |
| Peak program current | Peak program current | Iprog    |                | N/A | 20.8 | N/A | mA    |

### 3.12 Electrical Characteristics for TV Encoder

Table 3-12 PX3 SE Electrical Characteristics for TV Encoder

| Parameters                      | Symbol | Test condition                                                                                          | Min | Typ    | Max | Units      |
|---------------------------------|--------|---------------------------------------------------------------------------------------------------------|-----|--------|-----|------------|
| Bandgap Voltage                 | Vbg    |                                                                                                         | N/A | 1.21   | N/A | V          |
| Reference Resistor              |        | E96 series                                                                                              | N/A | 1130   | N/A | ohm        |
| Reference Current               |        |                                                                                                         | N/A | 1.07   | N/A | mA         |
| Output Full Scale Current       |        | Programmable through dacXgc5..0 word (external load of 37.5Ohm)<br>Refer to Operating Modes for details | N/A | N/A    | 34  | mA         |
| Resistive Load                  |        |                                                                                                         | N/A | 37.5   | N/A | Ohm        |
| Offset Error                    |        |                                                                                                         | N/A | +/-1   | N/A | %FS        |
| Gain Error(DAC to DAC matching) |        |                                                                                                         | N/A | +/-2   | N/A | %FS        |
| Absolute Gain Error             |        |                                                                                                         | N/A | +/-4   | N/A | %FS        |
| DNL                             |        | Ifs=34mA                                                                                                | N/A | +/-0.5 | N/A | LSB        |
| INL                             |        | Ifs=34mA                                                                                                | N/A | +/-1.0 | N/A | LSB        |
| Update Rate                     |        |                                                                                                         | 1   | N/A    | 300 | MHz        |
| Startup Time                    |        | From Complete shut-down to normal operation                                                             | N/A | 3      | 4   | Us         |
| Cable sensing Cycle time        |        | Details on Cable Sensing Cycle Timing Diagram                                                           | N/A | 4.5    | N/A | Clk cycles |
| SFDR                            | SFDR   | Fout=5MHz,<br>Ifs=34mA,<br>RL=37.5ohm,                                                                  | N/A | 58     | N/A | dBc        |

| Parameters                             | Symbol | Test condition                                      | Min | Typ | Max | Units |
|----------------------------------------|--------|-----------------------------------------------------|-----|-----|-----|-------|
|                                        |        | Fs=300MHz                                           |     |     |     |       |
|                                        |        | Fout=1MHz,<br>Ifs=34mA,<br>RL=37.5ohm,<br>Fs=300MHz | N/A | 61  | N/A | dBc   |
| SINAD                                  | SINAD  | Fout=5MHz,<br>Ifs=34mA,<br>RL=37.5ohm,<br>Fs=300MHz | N/A | 54  | N/A | dBc   |
|                                        |        | Fout=1MHz,<br>Ifs=34mA,<br>RL=37.5ohm,<br>Fs=300MHz | N/A | 57  | N/A | dBc   |
| High Voltage Analog Current(avddhv6.0) |        | Ifs=34mA                                            | N/A | 51  | N/A | mA    |
| Digital Current(dvdd)                  |        | Fs=300MHz                                           | N/A | 0.7 | N/A | mA    |
| Power down current                     |        | High Voltage Analog supply and digital supply       | N/A | 60  | N/A | uA    |

## Chapter 4 Hardware Guideline

### 4.1 Reference design for PX3 SE oscillator PCB connection

PX3 SE only use one oscillator, and its typical clock frequency is 24MHz. The oscillator will provide input clock to four on-chip PLLs.

- External reference circuit for oscillators with 24MHz input

In the following diagram,  $R_f$  is used to bias the inverter in the high gain region. The recommend value is 1Mohm.

$R_d$  is used to increase stability, low power consumption, suppress the gain in high frequency region and also reduce  $-R_d$  of the oscillator. Thus, proper  $R_d$  cannot be too large to cease the loop oscillating.

$C_1$  and  $C_2$  are deciding regard to the crystal or resonator CL specification.

the value for  $R_f, R_d, C_1, C_2$  must be adjusted a little to improve performance of oscillator based on real crystal model.

In PX3 SE, the crystal oscillator I/O cells have embedded internal resistor, so we need not add feedback resistor ( $R_f$ ) as above description.

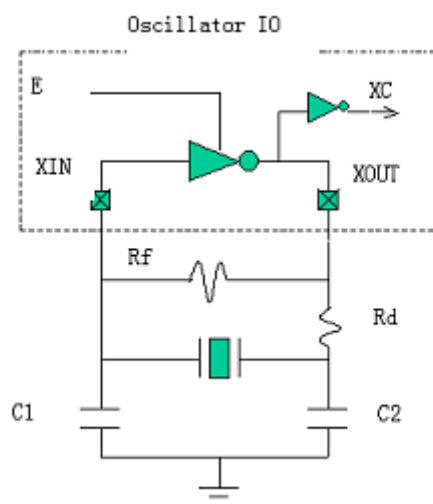


Fig.4-1 External Reference Circuit for 24MHzOscillators

### 4.2 Reference design for PLL PCB connection

The following reference design is suitable for PLL in PX3 SE.

For optimal jitter performance it is suggested to place external decoupling capacitor on the board between  $VDDHV-VSS(PLL\_VSS1)$  and  $VDDPOST-VSS(PLL\_VSS2)$ .  $VDDREF$  is typically connected to the global chip supply and does not require dedicated decoupling.

It is recommended to use at least one large capacitor (e.g. 4.7uF) capacitor for each separate supply. Additionally, a 100nF and 10nF capacitor may be placed in parallel since the lead inductance of the 4.7uF capacitor may be large.

Capacitors with minimal lead inductance should be selected. Ceramic type capacitors work well. The capacitors should be placed as close to the package pins as possible. No series impedance should be added anywhere on the board, and impedance to the voltage source should be minimized.

### 4.3 Reference design for USB OTG/Host2.0 connection

In PX3 SE there are USB OTG and USB Host2.0 interface, and they share a common PHY.

- Decouple Capacitance

We should include decoupling and bypass capacitors at each power pin in the layout. These are shown schematically in Figure 1-9. Place these components as closely as possible to the

power pins.

- Differential Lines

The differential lines should be routed together, minimizing the number of vias through which the signal lines are routed. Layout the differential pairs with controlled impedance of 90 ohm differential.

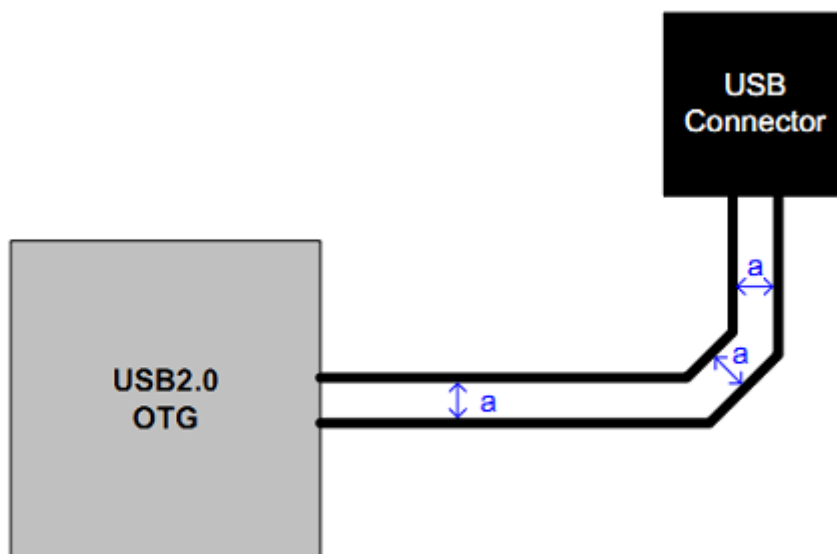


Fig.4-2 PX3 SE USB OTG/Host2.0 differential lines requirement.

If high-speed signals are routed on the Top layer, best results will be obtained if the Layer 2 is a Ground plane. Furthermore, there must have only one ground plane under high-speed signals in order to avoid the high-speed signals to cross another ground plane.

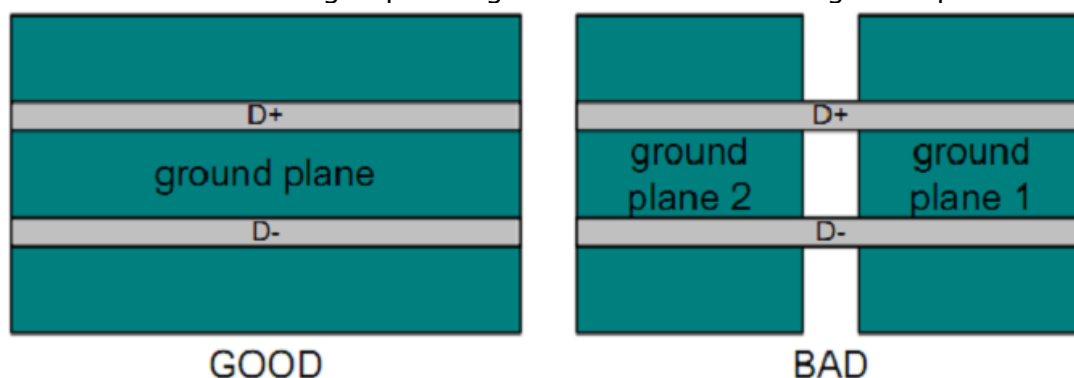


Fig.4-3 PX3 SE USB OTG/Host2.0 ground plane guide.

- Component Placement

It is very important to not create stubs on the high-speed lines, to avoid that, the placement of component should be the closed as possible from D+ and D- lines, like shown in the following figure.

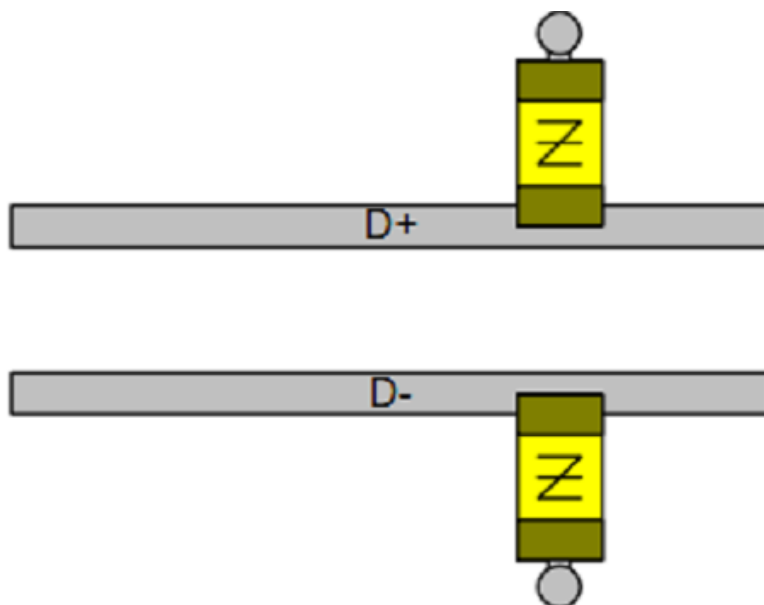


Fig.4-4 PX3 SE USB OTG/Host2.0 component placement.

#### 4.4 Reference design for HDMI Tx PHY connection

In PX3 SE, the following diagram shows external PCB reference design for HDMI Tx PHY. It mainly introduces how to connect the TMDS channel, DDC channel, CEC channel and HPD signal of PX3 SE HDMI Transmitter to the HDMI port type A.

- TMDS channel

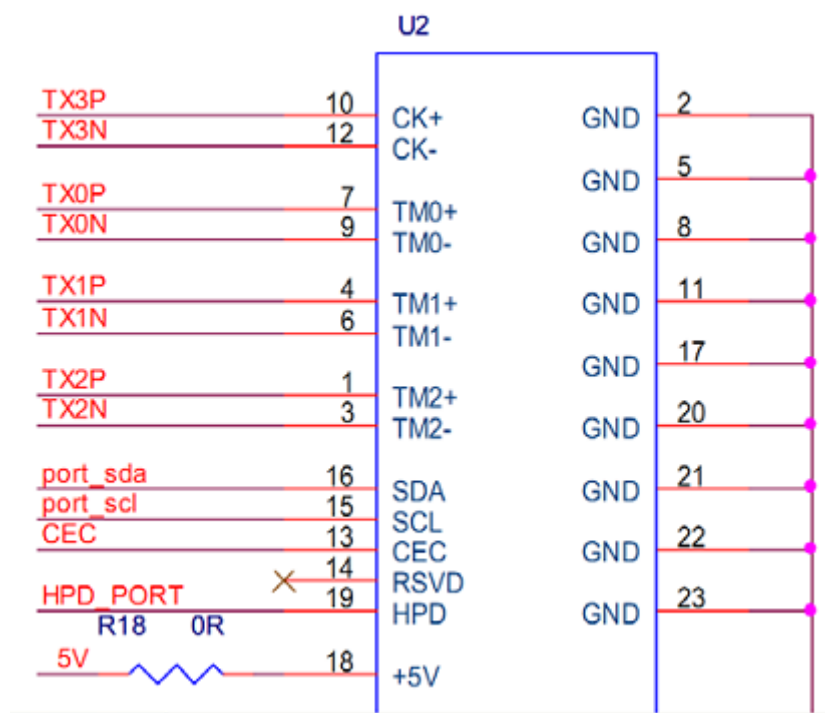


Fig.4-5 PX3 SE HDMI interface reference connection

- DDC channel

PX3 SE can accept DDC\_sda/DDC\_scl 5V voltage input, it's no need to add additional Transmitter to transfer the DDC\_sda/DDC\_scl from 5V to 3.3V outside the chip.

- CEC channel

PX3 SE can accept CEC 5V voltage input, it's no need to add additional Transmitter to transfer the CEC from 5V to 3.3V outside the chip.

- HPD

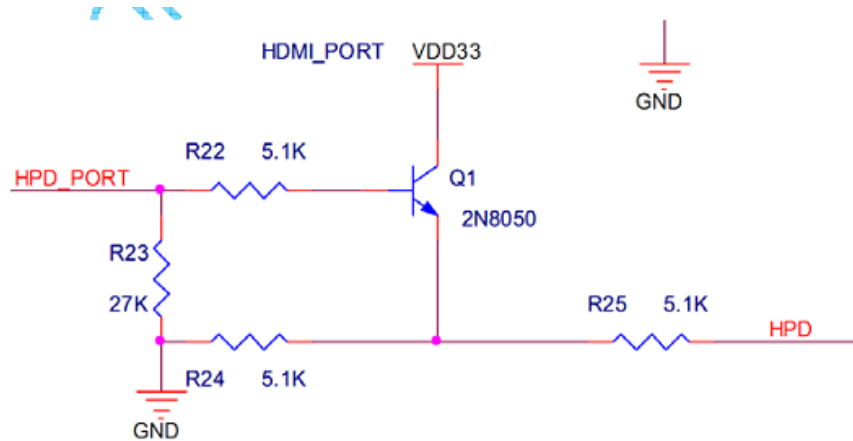


Fig.4-6 PX3 SE HDMI CEC interface reference connection

- ESD

If ESD suppression devices or common mode chokes are used, place them near the HDMI connector.

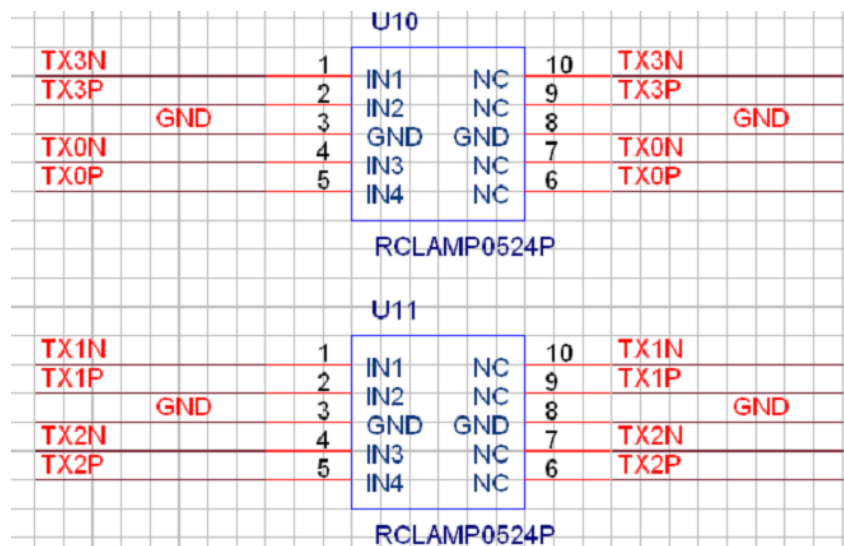


Fig.4-7 PX3 SE HDMI ESD interface reference connection

## 4.5 Reference design for Audio Codec connection

In PX3 SE, the following diagram shows external PCB reference design for Audio Codec.

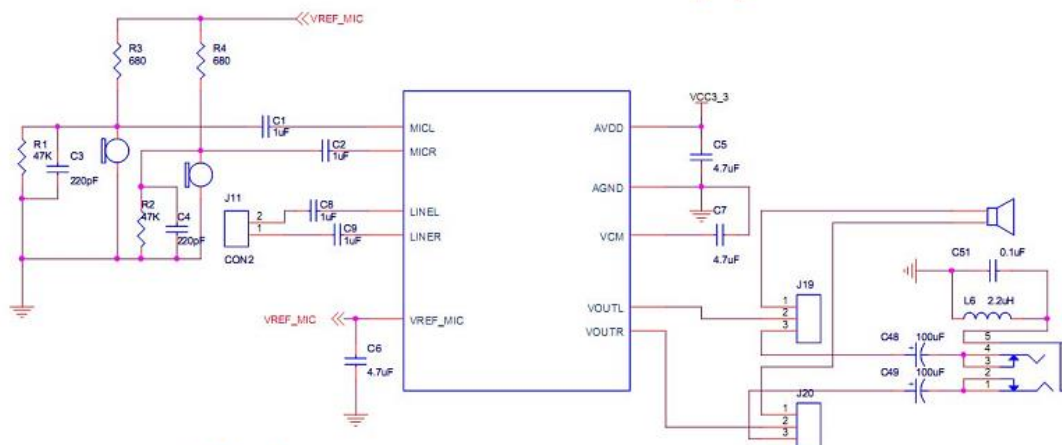


Fig.4-8 PX3 SE Audio Codec interface reference connection

As above diagram shows, the MICL and MICR are each connected with a MIC through a 1uF

CAP, the LINEL and LINER have the same function as the MICL and MICR. The R1 and C3 are formed a filter for the MIC, and the R2, C4 have same function. The VREF\_MIC is used for bias the MIC through a resistor. The resistor value should be changed according the MIC. The AVDD should be supplied by 3.3V. The CAP connected with AVDD should be placed as close as possible

The VCM is connected with GND through a 4.7uF CAP. The CAP should be placed as close as possible. The VOUTL and VOUTR could be connected with a speaker or an earphone. When connecting with a speaker, they could connect it directly. When connecting with an earphone, they should connect it through a 100uF CAP. The J19 and J20 are dip-switches, and you could select a speaker or an earphone as the output.

## 4.6 PX3 SE Power on reset descriptions

NPOR is hardware reset signal from out-chip, which is filtered glitch to obtain signal sysrstn. To make PLLs work normally, the PLL reset signal (pllrstn) must maintain high for more than 1us, and PLLs start to lock when pllrstndeassert, and the PLL max lock time is 1500 PLL REFCLK cycles. And then the system will wait about 138us, and then deactive reset signal chiprstn. The signal chiprstn is used to generate output clocks in CRU. After CRU start output clocks, the system waits again for 512cycles (21.3us) to deactive signal rstn\_pre, which is used to generate power on reset of all IP.

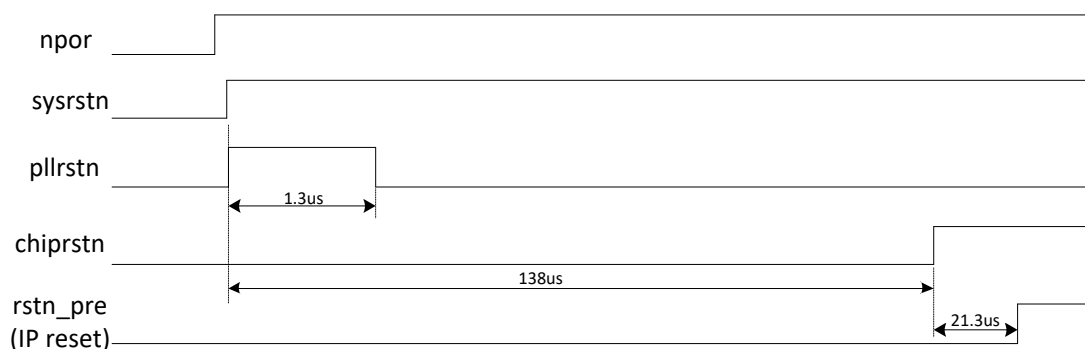


Fig.4-9 PX3 SE reset signals sequence

## Chapter 5 Thermal Management

### 5.1 Overview

For reliability and operability concerns, the absolute maximum junction temperature of PX3 SE has to be below 125℃.

### 5.2 Package Thermal Characteristics

Table 4-1 provides the thermal resistance characteristics for the package used on PX3 SE. The resulting simulation data for reference only, please prevail in kind test.

Table 5-1 PX3 SE Thermal Resistance Characteristics

| Package<br>(EHS-FCBGA) | Power(W) | $\theta_{JA}$ (℃/W) | $\theta_{JB}$ (℃/W) | $\theta_{JC}$ (℃/W) |
|------------------------|----------|---------------------|---------------------|---------------------|
| PX3 SE                 | 4.5      | 20.23               | 9.6                 | 11.6                |

Note: The testing PCB is based on 4 layers, 90x90 mm, 1 mm Thickness, ambient temperature is 25℃