



RCR2562

PFM Step-up DC/DC Converter

● Features

- Low Start-up Voltage, 1.1V at 1mA
- Minimal Number of External Components (Only an Inductor, a Diode, a MOSFET and two Capacitors)
- Adjustable version ($V_{REF} = 1.25V$ $V_{REF} = 2.7V$ or $V_{REF} = 3.3V$)
- Ultra Low Input Current (12 μA at Switch Off)
- $\pm 2\%$ High Output Voltage Accuracy
- Low Ripple and Low Noise
- 75% Efficiency with Low Cost Inductor
- SOT23-5L Small Packages

● General Description

The RCR2562 Series are PFM Step-up DC/DC ICs with ultra low supply current by CMOS process and suitable for use with

battery-powered instruments.


Consists of an oscillator, a PFM control circuit, a driver Pin EXT to external MOSFET, a reference voltage unit, an error amplifier. A low ripple and high efficiency step-up DC/DC converter can be constructed of this RCR2562 IC with only six external components.

The RCR2562 works on ultra low start-up voltage, typically max start-up voltage less than 1.1V at 1mA load current

● Applications

- Battery-powered equipment
- Cameras, Camcorders, VCRs, PDAs, pagers, electronic data banks, and hand-held communication equipment

● Package Information

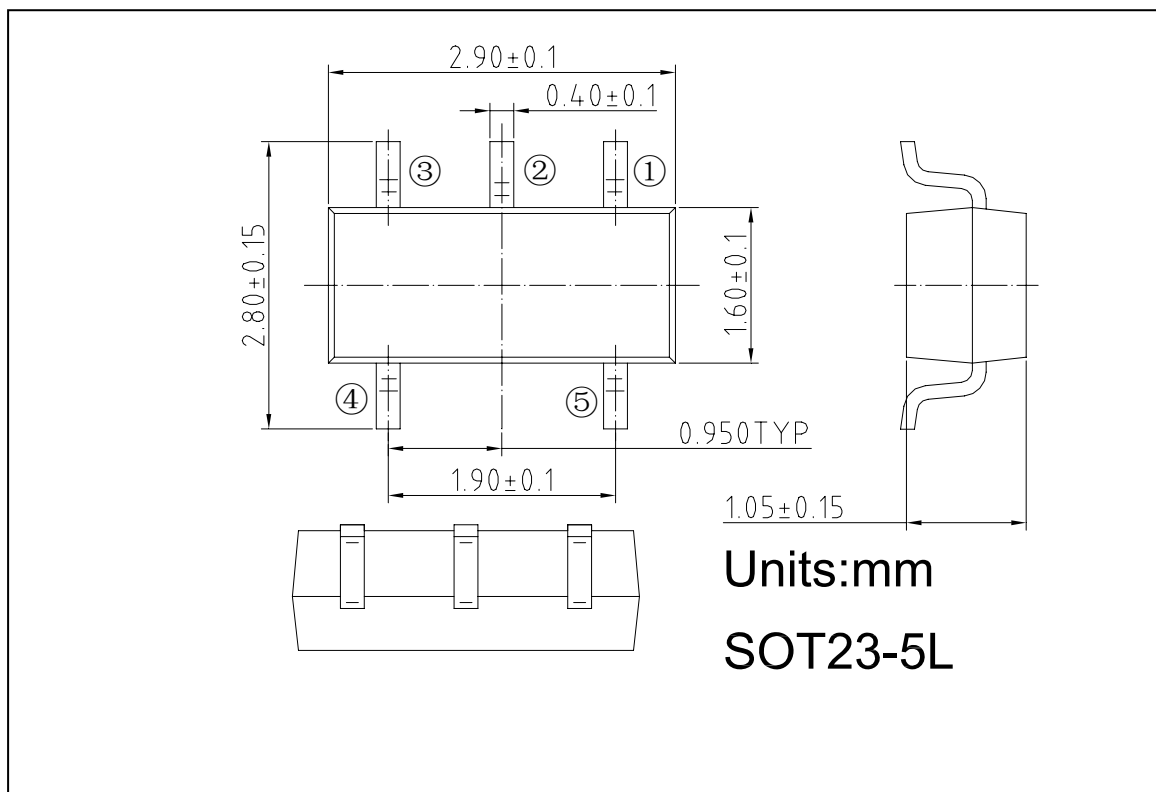




RCR2562

Pin Configurations

Pin Port	SOT23-5L
①	FB
②	VIN
③	NC
④	GND
⑤	EXT

Functional Block Diagram

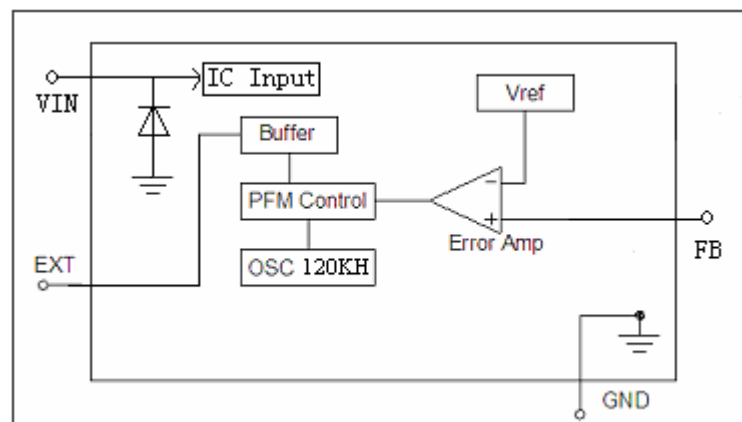

Ordering Information

RCR2562 -

Package Type

SK: SOT23-5L

Reference Voltage

125= 1.25V; 270= 2.70V; 330= 3.30V

Indicate The Product Number

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Output Voltage	V_{OUT}	-0.3 to 10	V
EXT Pin Voltage	V_{EXT}	-0.3 to 10	V
EXT Pin Current (2)	I_{EXT}	± 30	mA
Power Dissipation ($T_A = 25^\circ\text{C}$)	P_D	250	mW
Operating Temperature Range	T_{OPR}	-40 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^\circ\text{C}$



RCR2562

Electrical Characteristics

$T_A = 25^\circ\text{C}$, unless otherwise specified


Parameter		Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage Accuracy		ΔV_{OUT}		-2	--	+2	%
Input Voltage		V_{IN}		--	--	10	V
V_{FB} Voltage		V_{FB}	RCR2562 - 125SK	1.22	1.25	1.28	V
			RCR2562 - 270SK	2.65	2.70	2.75	V
			RCR2562 - 330SK	3.24	3.3	3.36	V
Start-up Voltage		V_{ST}	$I_{OUT} = 1\text{mA}$, $V_{IN} : 0 \text{ to } 2\text{V}$	--	1.0	1.1	V
Efficiency	$V_{OUT} \leq 3.5\text{V}$	EFFI		--	75	--	%
	$V_{OUT} > 3.5\text{V}$			--	85	--	
Input Current1	$V_{OUT} \leq 3.5\text{V}$	I_{SS}	To be measured at V_{IN} at no load	--	30	40	μA
	$V_{OUT} > 3.5\text{V}$			--	50	60	
Input Current2	$V_{OUT} \leq 3.5\text{V}$	$I_{SWITCHING}$	To be measured at V_{OUT} in switch off condition	--	6	12	μA
	$V_{OUT} > 3.5\text{V}$			--	6	12	
EXT"H"Output Current	$V_{OUT} \leq 3.5\text{V}$	I_{SH}	$V_{EXT} = V_{OUT} - 0.4\text{V}$	-1.5	--	--	mA
	$V_{OUT} > 3.5\text{V}$			-2	--	--	
EXT"L"Output Current	$V_{OUT} \leq 3.5\text{V}$	I_{SL}	$V_{EXT} = 0.4\text{V}$	1.5	--	--	mA
	$V_{OUT} > 3.5\text{V}$			2	--	--	
Maximum Oscillator		F_{MAX}		80	120	160	kHz
Oscillator Duty Cycle		D_{OSC}	On (V_{LX} "L") side	70	78	85	%

Note1 $V_{out(T)}$ = Specified output Voltage.

Note2 Unless otherwise provided, $V_{SS} = \text{GND}$, $I_{OUT} = 10\text{mA}$,

Note3 MOSFET: RCR1516

Typical Application Circuit ($V_{OUT} = 5\text{V}$)

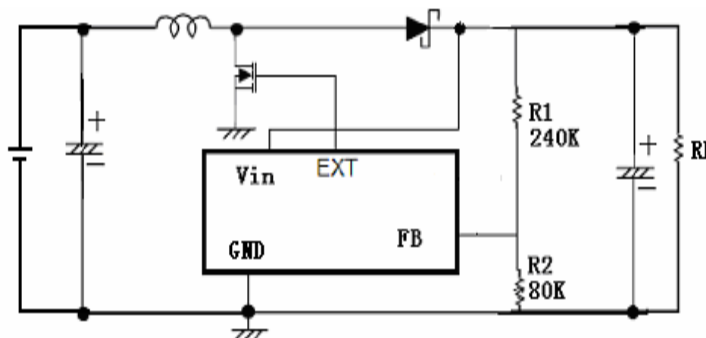

Components :

Inductor : 47 μH , Diode : 1N5818, NMOS : RCR1516

Input Capacitor : 1 $\mu\text{F}/10\text{V}$ (Tantalum) Output Capacitor : 47 $\mu\text{F}/16\text{V}$ (Tantalum)



RCR2562

● Typical Performance Characteristics

1、RCR2562 (When $V_{OUT} = 5V$) :

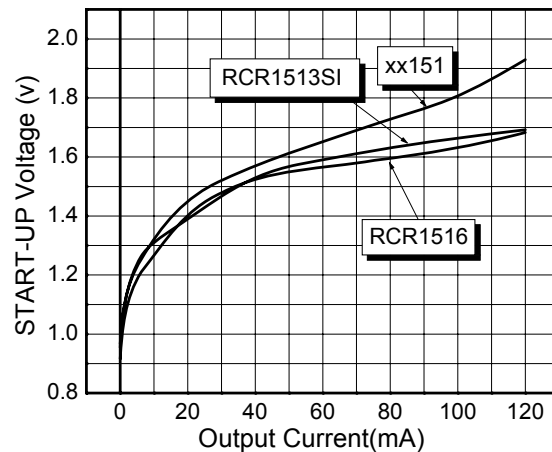


Figure1.Start-up Voltage VS Output Current

2、RCR2562-125、RCR2562-27 ($V_{OUT} = 3.0V$) :

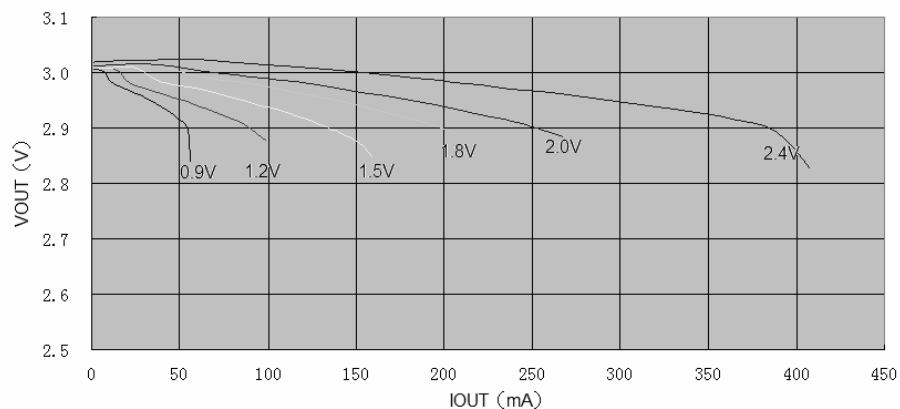


Figure2. Output Voltage VS Output Current

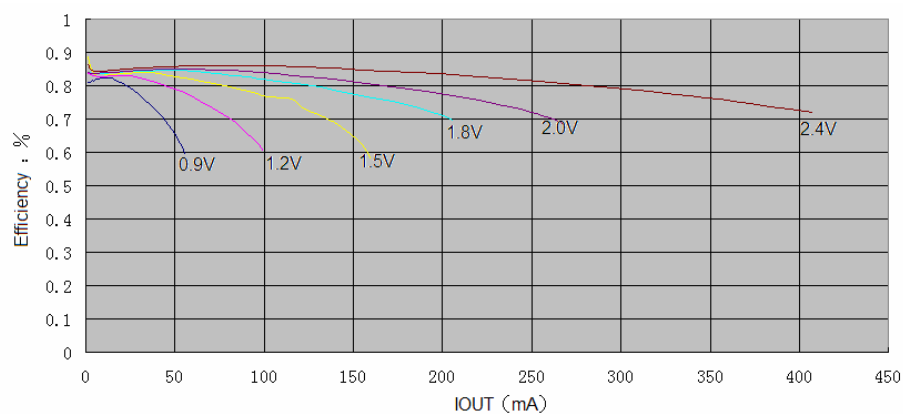


Figure3. Efficiency VS Output current

3、RCR2562 ($V_{OUT} = 3.3V$) :



RCR2562

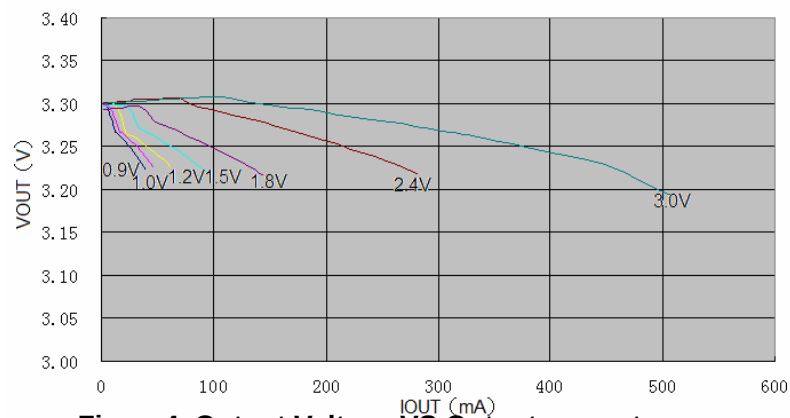


Figure4. Output Voltage VS Output current

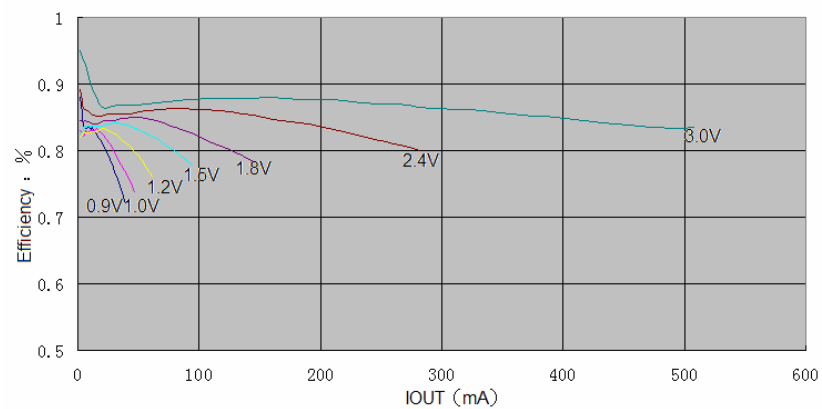


Figure5. Efficiency VS Output current

4、RCR2562 ($V_{out} = 5.0V$) :


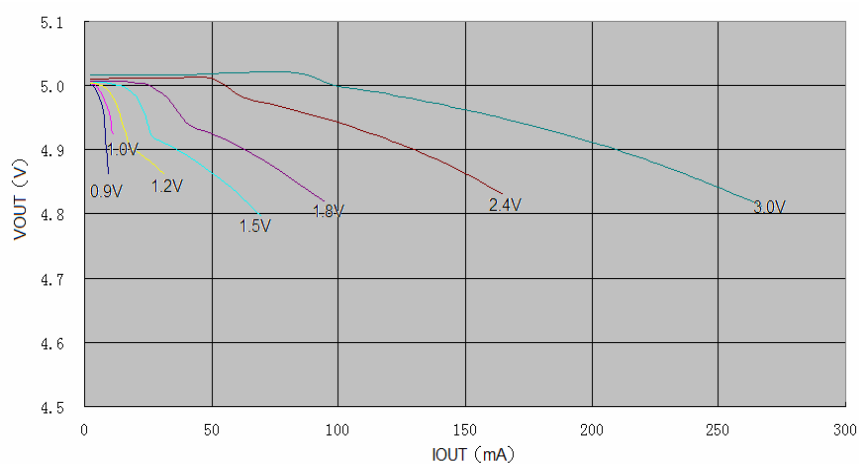


Figure6. Output Voltage VS Output current

**RCR2562****5、Efficiency VS. Output Current:****Figure7. Efficiency VS Output current**

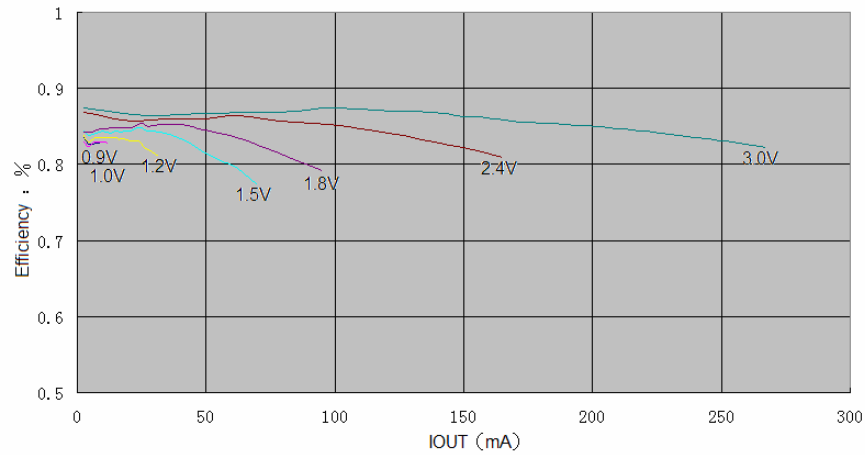

RCR2562

DISCLAIMER

INNOVA SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. INNOVA DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.