



# SGM5200

## 12-Bit, 1MSPS, 16 Channels, Single-Ended, Serial Interface ADC

### GENERAL DESCRIPTION

The SGM5200 is a 12-bit, multi-channel input, successive approximation (SAR) analog-to-digital converter (ADC).

The SGM5200 analog power supply range is 2.7V to 5.25V. The SGM5200 has an SPI-compatible interface that digital power supply range is 1.7V to 5.25V.

The input signal is sampled on the nCS falling edge. The ADC conversion is droved by external clock SCLK.

The SGM5200 supports manual channel selection and two kinds of auto channel scan modes.

The input range of SGM5200 is software configurable, 0 to reference voltage or 0 to two times of reference voltage. It also supports two programmable alarm thresholds for each channel.

The SGM5200 provides power-down mode.

The SGM5200 is available in Green TSSOP-38 and TQFN-5×5-32L packages. It operates over an ambient temperature range -40°C to +125°C.

### FEATURES

- **12-Bit Resolution**
- **16 Channels**
- **Sampling Rate: Up to 1MHz**
- **Supply Voltage Ranges:**
  - ◆ **Analog Supply: 2.7V to 5.25V**
  - ◆ **Digital Supply: 1.7V to 5.25V**
- **Two Software Selectable Unipolar Input Ranges:**
  - ◆ **Range 1: 0V to  $V_{REF}$**
  - ◆ **Range 2: 0V to  $2 \times V_{REF}$**
- **Supports Auto and Manual Channel Selections**
- **Individually Configurable GPIOs Function:**
  - ◆ **Four GPIOs in TSSOP Package**
  - ◆ **One GPIO in TQFN Package**
- **20MHz SPI-Compatible Serial Interface**
- **Power-Down Current: 1.4μA (TYP)**
- **Input Bandwidth: 45MHz (TYP) at -3dB**
- **Typical Power Consumption:**
  - ◆ **24mW at 1MSPS ( $V_A = 5V, V_{BD} = 3V$ )**
- **Available in Green TSSOP-38 and TQFN-5×5-32L Packages**

### APPLICATIONS

PLC  
Optical Module Signal Monitoring  
Digital Power Supplies  
Industrial Automation Systems

**PACKAGE/ORDERING INFORMATION**

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM5200	TSSOP-38	-40°C to +125°C	SGM5200XTS38G/TR	SGM5200 XTS38 XXXXX	Tape and Reel, 4000
	TQFN-5x5-32L	-40°C to +125°C	SGM5200XTQL32G/TR	SGM5200 XTQL32 XXXXX	Tape and Reel, 3000

**MARKING INFORMATION**

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

**XXXXX**



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

- Voltage Range (with Respect to AGND)
  - +VA ..... -0.3V to 6V
  - AINP or CHx ..... -0.3V to V<sub>A</sub> + 0.3V
- Voltage Range (with Respect to BGND)
  - +VBD ..... -0.3V to 6V
  - Digital Input Voltage ..... -0.3V to 6V
  - Digital Output Voltage ..... -0.3V to V<sub>A</sub> + 0.3V
- Input Current to Any Pin except Supply Pins
  - ..... -10mA to 10mA
- Junction Temperature ..... +150°C
- Storage Temperature Range ..... -65°C to +150°C
- Lead Temperature (Soldering, 10s) ..... +260°C
- ESD Susceptibility
  - HBM ..... 4000V
  - CDM ..... 1000V

**RECOMMENDED OPERATING CONDITIONS**

- Analog Supply Voltage Range ..... 2.7V to 5.25V
- Digital I/O Supply Voltage Range ..... 1.7V to V<sub>A</sub>
- Reference Voltage Range ..... 2V to 3V
- SCLK Frequency ..... 20MHz
- Operating Temperature Range ..... -40°C to +125°C

**OVERSTRESS CAUTION**

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.



**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

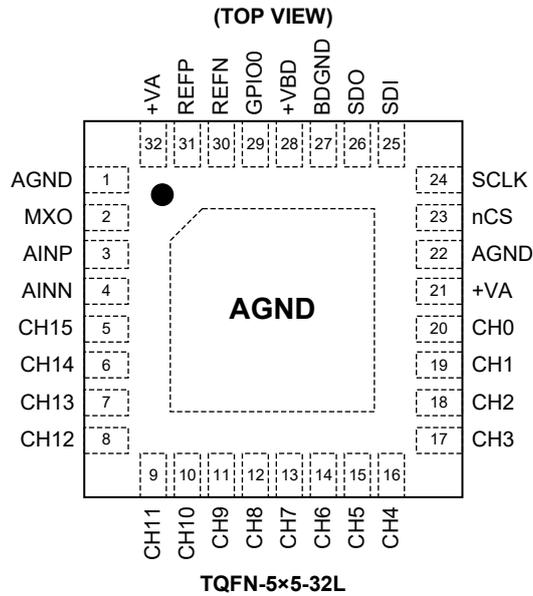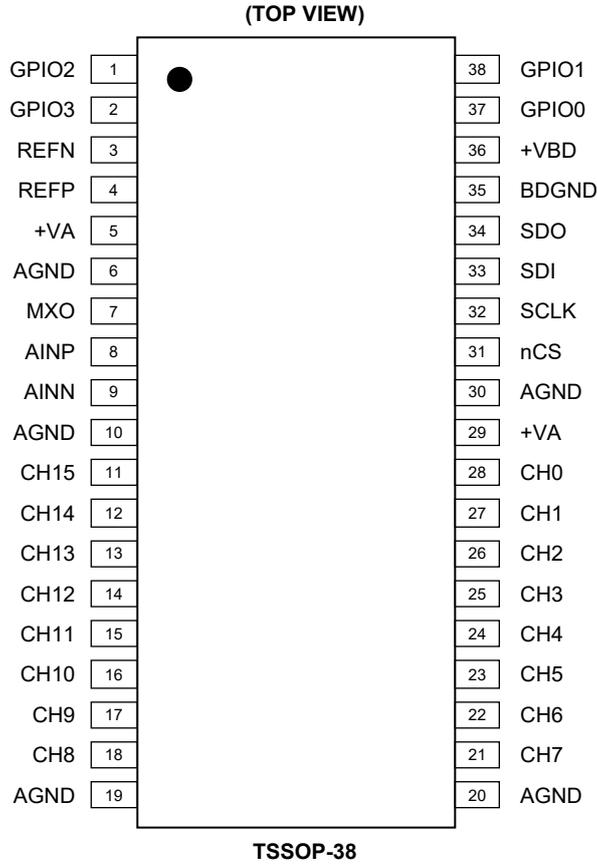

## PIN DESCRIPTION

PIN		NAME	TYPE <sup>(1)</sup>	FUNCTION
TSSOP-38	TQFN-5×5-32L			
1	–	GPI02	DIO	General-Purpose Input or Output.
		Range	DI	Selects ADC Input Range. High (1): select Range 2 (0V to $2 \times V_{REF}$ ). Low (0): select Range 1 (0V to $V_{REF}$ ).
2	–	GPI03	DIO	General-Purpose Input or Output.
		nPD	DI	Power-Down Input. Active low.
3	30	REFN	AI	Reference Ground.
4	31	REFP	AI	Reference Input.
5, 29	21, 32	+VA	–	Analog Power Supply.
6, 10, 19, 20, 30	1, 22	AGND	–	Analog Ground.
7	2	MXO	AO	Multiplexer Output.
8	3	AINP	AI	ADC Input Signal.
9	4	AINN	AI	ADC Input Ground.
11	5	CH15	AI	Analog Channel Inputs for Multiplexer.
12	6	CH14	AI	
13	7	CH13	AI	
14	8	CH12	AI	
15	9	CH11	AI	
16	10	CH10	AI	
17	11	CH9	AI	
18	12	CH8	AI	
21	13	CH7	AI	
22	14	CH6	AI	
23	15	CH5	AI	
24	16	CH4	AI	
25	17	CH3	AI	
26	18	CH2	AI	
27	19	CH1	AI	
28	20	CH0	AI	
31	23	nCS	DI	Chip Select. Active low.
32	24	SCLK	DI	Serial Clock Input.
33	25	SDI	DI	Serial Data Input.
34	26	SDO	DI	Serial Data Output.
35	27	BDGND	–	Digital Ground.
36	28	+VBD	–	Digital Power Supply.
37	29	GPI00	DIO	General-Purpose Input or Output.
		Alarm	DO	Alarm Output. Active high. Refer to Programming section for a detailed configuration.
38	–	GPI01	DIO	General-Purpose Input or Output.
		Low Alarm	DO	Low Alarm Output Indication. Active high.

## NOTE:

1. AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, DIO = Digital Input or Output.

**ELECTRICAL CHARACTERISTICS**

( $V_A = 2.7V$  to  $5.25V$ ,  $V_{BD} = 1.7V$  to  $V_A$ ,  $V_{REF} = 2.5V \pm 0.1V$ ,  $f_{SAMPLE} = 1MHz$ , Full =  $-40^\circ C$  to  $+125^\circ C$ , typical values are at  $T_A = +25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>Analog Input</b>						
Full-Scale Input Span <sup>(1)</sup>		Range 1	0		$V_{REF}$	V
		Range 2 while $2 \times V_{REF} \leq V_A$	0		$2 \times V_{REF}$	
Absolute Input Range		Range 1	-0.2		$V_{REF} + 0.2$	V
		Range 2 while $2 \times V_{REF} \leq V_A$	-0.2		$2 \times V_{REF} + 0.2$	
Input Capacitance				31		pF
Input Leakage Current		$T_A = +125^\circ C$		60		nA
<b>System Performance</b>						
Resolution				12		Bits
No Missing Codes		Range 1	11			Bits
		Range 2	12			
Integral Linearity		Range 1	-3.50	$\pm 1.6$	2.60	LSB <sup>(2)</sup>
		Range 2	-1.32	$\pm 0.8$	1.32	
Differential Linearity		Range 1	-1.00	-1/+1.3	2.20	LSB
		Range 2	-0.99	$\pm 0.5$	1.00	
Offset Error <sup>(3)</sup>		Range 1	-8.00	$\pm 1.2$	8.00	LSB
		Range 2	-5.60	$\pm 1.6$	5.60	
Gain Error		Range 1	-5.20	$\pm 0.8$	4.40	LSB
		Range 2	-4.10	$\pm 0.8$	3.10	
Total Unadjusted Error	TUE	Range 1		$\pm 1.8$		LSB
		Range 2		$\pm 1.9$		
<b>Sampling Dynamics</b>						
Conversion Time		20MHz SCLK		800		ns
Acquisition Time				325		ns
Maximum Throughput Rate		20MHz SCLK			1	MHz
Aperture Delay				6		ns
<b>Dynamic Characteristics</b>						
Total Harmonic Distortion <sup>(4)</sup>	THD	100kHz	Range 1		-77	dB
			Range 2		-79	
Signal-to-Noise Ratio	SNR	100kHz	Range 1	66.4	70.4	dB
			Range 2	67.9	71.4	
Signal-to-Noise + Distortion		100kHz	Range 1	65.6	69.5	dB
			Range 2	66.7	70.7	
Spurious Free Dynamic Range		100kHz	Range 1		78	dB
			Range 2		81	
Small Signal Bandwidth		At -3dB		45		MHz
Channel-to-Channel Crosstalk		Any off-channel with 100kHz, full-scale input to channel being sampled with DC input (isolation crosstalk)			-100	dB
		From previously sampled to channel with 100kHz, full-scale input to channel being sampled with DC input (memory crosstalk)			-84	

**ELECTRICAL CHARACTERISTICS (continued)**

( $V_A = 2.7V$  to  $5.25V$ ,  $V_{BD} = 1.7V$  to  $V_A$ ,  $V_{REF} = 2.5V \pm 0.1V$ ,  $f_{SAMPLE} = 1MHz$ , Full =  $-40^\circ C$  to  $+125^\circ C$ , typical values are at  $T_A = +25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>External Reference Input</b>						
Reference Voltage at REFP <sup>(5)</sup>	$V_{REF}$		2	2.5	3	V
Reference Input Resistance		$f_{SAMPLE} = 1MHz$		31		k $\Omega$
<b>Alarm Setting</b>						
High Threshold Range			0		4092	LSB
Low Threshold Range			0		4092	LSB
<b>Digital Input/Output</b>						
High Input Voltage	$V_{IH}$	$V_{BD} = 5.25V$	3.10			V
		$V_{BD} = 1.7V$	1.25			
Low Input Voltage	$V_{IL}$	$V_{BD} = 5.25V$			1.90	V
		$V_{BD} = 1.7V$			0.45	
High Output Voltage	$V_{OH}$	$I_{SOURCE} = 200\mu A$	$V_{BD} - 0.2$			V
Low Output Voltage	$V_{OL}$	$I_{SINK} = 200\mu A$			0.4	V
Data Format MSB First				MSB First		
<b>Power Requirements</b>						
Analog Supply Voltage	$V_A$		2.7	3.3	5.25	V
Digital I/O Supply Voltage	$V_{BD}$		1.7	3.3	5.25	V
Analog Supply Current (Normal Mode)	$I_A$	$V_A = 2.7V$ to $3.6V$ and $1MHz$ throughput		3		mA
		$V_A = 2.7V$ to $3.6V$ static state		1.1		
		$V_A = 4.7V$ to $5.25V$ and $1MHz$ throughput		4.1	5.4	
		$V_A = 4.7V$ to $5.25V$ static state		1.1	2.2	
Power-Down State Supply Current				1.4		$\mu A$
Digital I/O Supply Current	$I_{BD}$	$V_A = 5.25V$ , $f_{SAMPLE} = 1MHz$		1.3		mA
Power-Up Time				1		$\mu s$
Invalid Conversions after Power-Up or Reset				1		Conversion

## NOTES:

1. Ideal input span; not consider gain error and offset error.
2. LSB = Least Significant Bit.
3. The measurement is performed relative to the ideal full-scale input.
4. The calculation is performed on the first nine harmonics of the input frequency.
5. The device is designed to operate that reference voltage is 2V to 3V. While, when  $V_{REF} < 2.4V$ , it expects lower noise performance. It is due to SNR degradation resulting from lowered signal range.

## TIMING CHARACTERISTICS

(V<sub>A</sub> = 2.7V to 5.25V, Full = -40°C to +125°C, unless otherwise noted.)<sup>(1)(2)</sup> (See Figure 1 and Figure 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Conversion Time	t <sub>CONV</sub>	V <sub>BD</sub> = 1.8V			16	SCLK
		V <sub>BD</sub> = 3V			16	
		V <sub>BD</sub> = 5V			16	
Delay Time (nCS Low to First Data DO15 Out)	t <sub>1</sub>	V <sub>BD</sub> = 1.8V			38	ns
		V <sub>BD</sub> = 3V			27	
		V <sub>BD</sub> = 5V			17	
Hold Time (SCLK Falling to SDO Data Bit Valid)	t <sub>2</sub>	V <sub>BD</sub> = 1.8V	13			ns
		V <sub>BD</sub> = 3V	12			
		V <sub>BD</sub> = 5V	12			
Delay Time (SCLK Falling to SDO Next Data Bit Valid)	t <sub>3</sub>	V <sub>BD</sub> = 1.8V			35	ns
		V <sub>BD</sub> = 3V			27	
		V <sub>BD</sub> = 5V			17	
Setup Time (SDI Valid to Rising Edge of SCLK)	t <sub>4</sub>	V <sub>BD</sub> = 1.8V	2			ns
		V <sub>BD</sub> = 3V	3			
		V <sub>BD</sub> = 5V	4			
Hold Time (Rising Edge of SCLK to SDI Valid)	t <sub>5</sub>	V <sub>BD</sub> = 1.8V	12			ns
		V <sub>BD</sub> = 3V	10			
		V <sub>BD</sub> = 5V	6			
Delay Time (16 <sup>th</sup> SCLK Falling Edge to SDO 3-State)	t <sub>6</sub>	V <sub>BD</sub> = 1.8V			26	ns
		V <sub>BD</sub> = 3V			22	
		V <sub>BD</sub> = 5V			13	
Minimum Quiet Sampling Time Needed from Bus 3-State to Start of Next Conversion	t <sub>7</sub>	V <sub>BD</sub> = 1.8V	40			ns
		V <sub>BD</sub> = 3V	40			
		V <sub>BD</sub> = 5V	40			
Pulse Duration nCS High	t <sub>8</sub>	V <sub>BD</sub> = 1.8V	20			ns
		V <sub>BD</sub> = 3V	20			
		V <sub>BD</sub> = 5V	20			
Setup Time (nCS Low to First Rising Edge of SCLK)	t <sub>9</sub>	V <sub>BD</sub> = 1.8V	8			ns
		V <sub>BD</sub> = 3V	6			
		V <sub>BD</sub> = 5V	4			
Pulse Duration SCLK High	t <sub>10</sub>	V <sub>BD</sub> = 1.8V	20			ns
		V <sub>BD</sub> = 3V	20			
		V <sub>BD</sub> = 5V	20			
Pulse Duration SCLK Low	t <sub>11</sub>	V <sub>BD</sub> = 1.8V	20			ns
		V <sub>BD</sub> = 3V	20			
		V <sub>BD</sub> = 5V	20			
SCLK Frequency		V <sub>BD</sub> = 1.8V			20	MHz
		V <sub>BD</sub> = 3V			20	
		V <sub>BD</sub> = 5V			20	

NOTES: 1. 1.6V to 1.9V range is applied for 1.8V specifications; 2.7V to 3.6V range is applied for 3V specifications; 4.75V to 5.25V range is applied for 5V specifications.

2. With 50pF load.

TIMING DIAGRAM

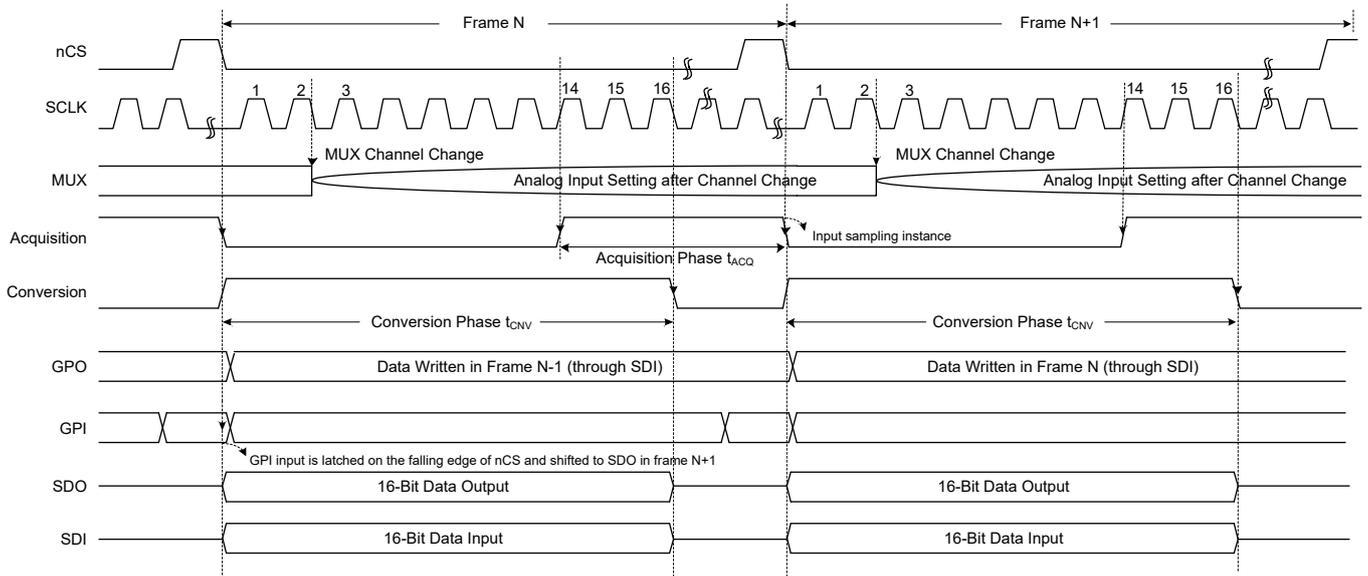


Figure 1. Device Operation Timing Diagram







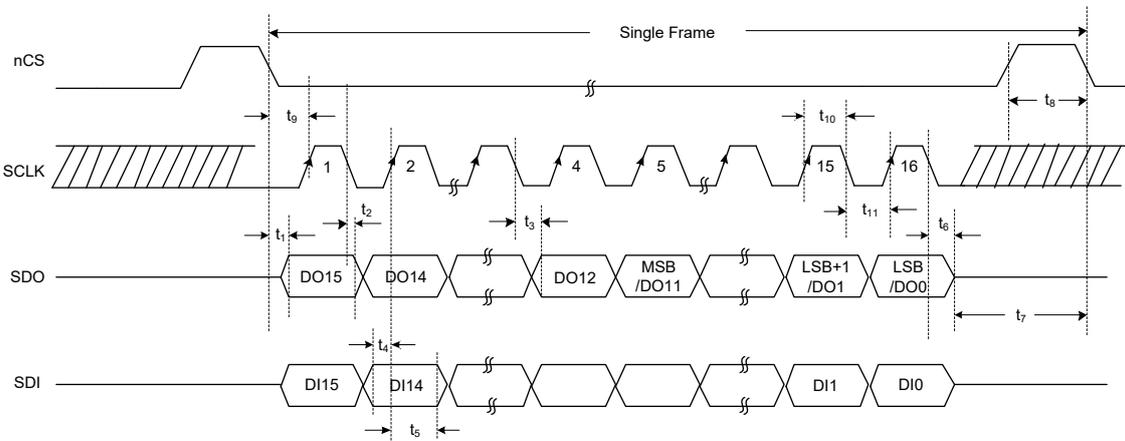



Figure 2. Serial Interface Timing Diagram

TYPICAL PERFORMANCE CHARACTERISTICS

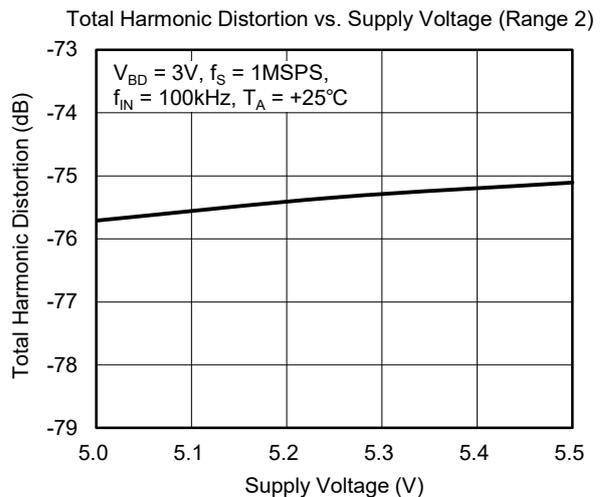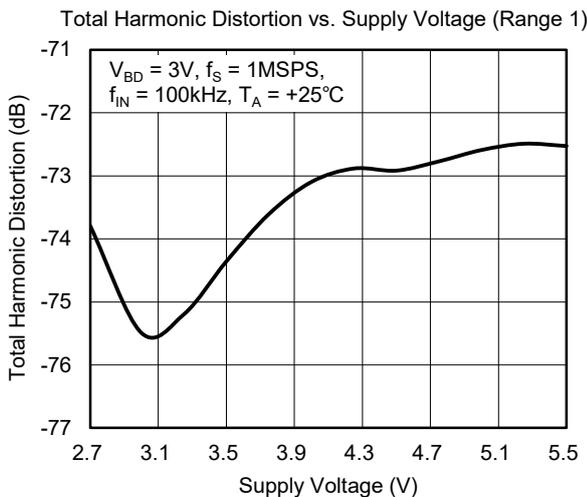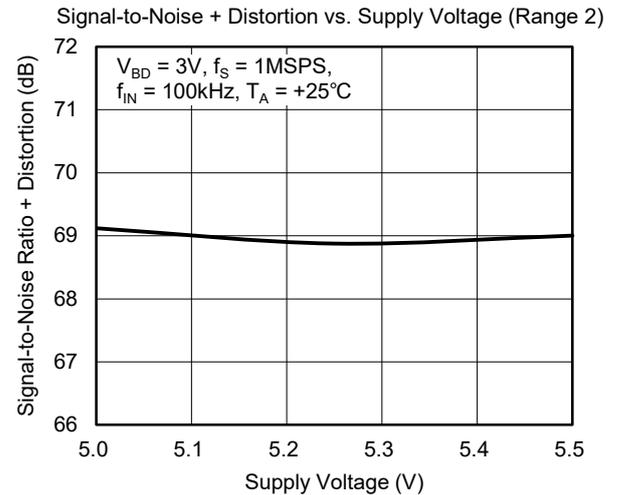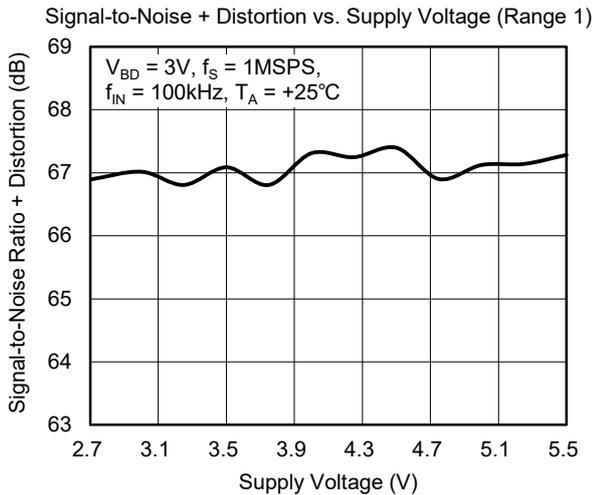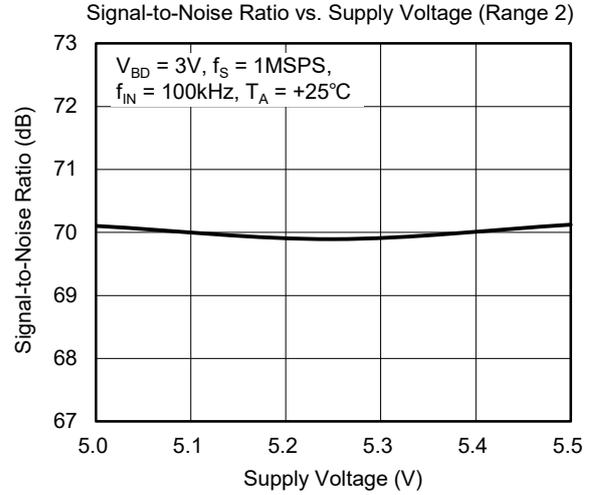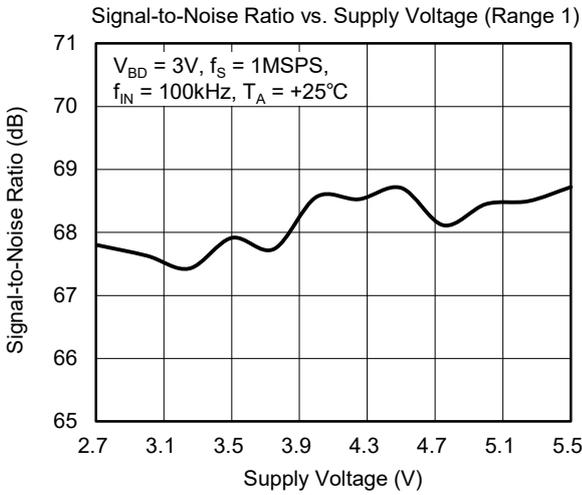


TYPICAL PERFORMANCE CHARACTERISTICS (continued)


Spurious Free Dynamic Range vs. Supply Voltage (Range 1)

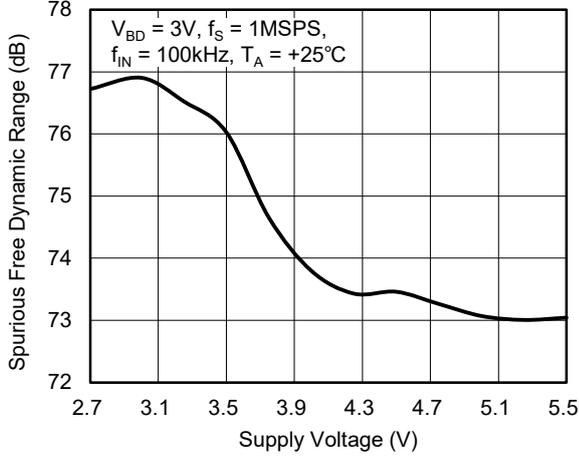


Spurious Free Dynamic Range vs. Supply Voltage (Range 2)

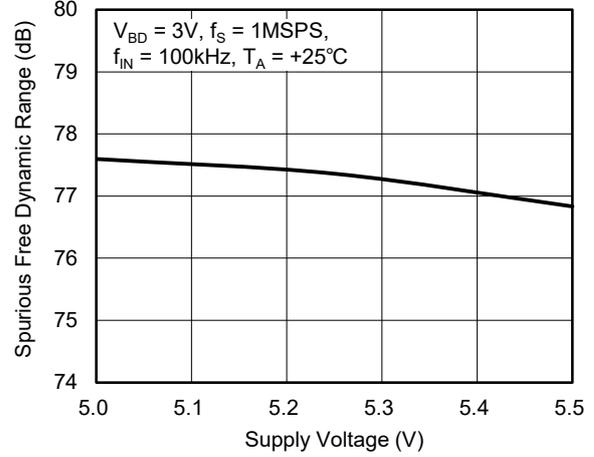


Signal-to-Noise Ratio vs. Input Frequency

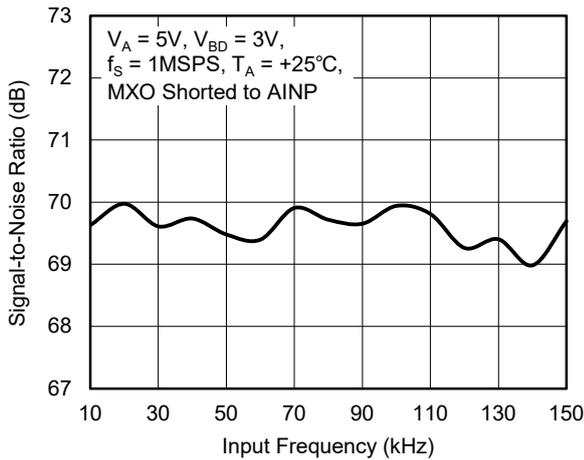


Signal-to-Noise + Distortion vs. Input Frequency

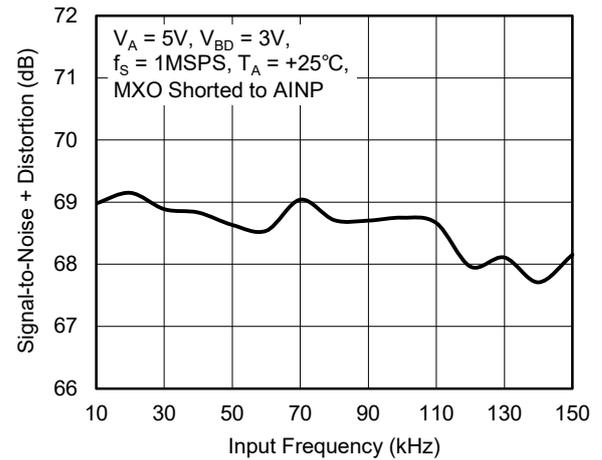







Total Harmonic Distortion vs. Input Frequency

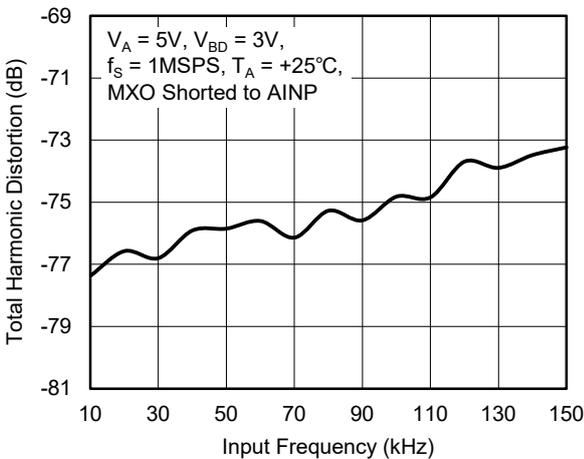







Spurious Free Dynamic Range vs. Input Frequency

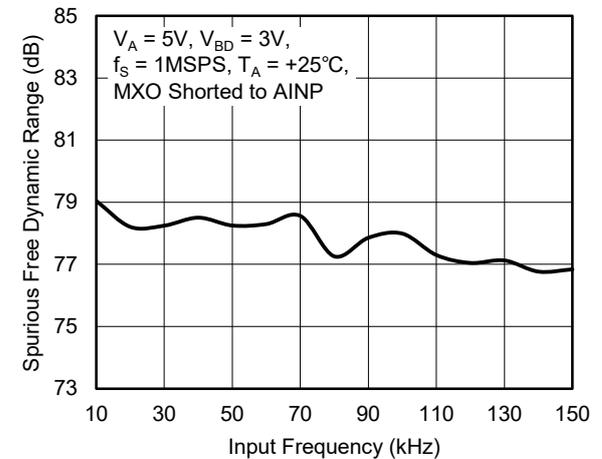







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

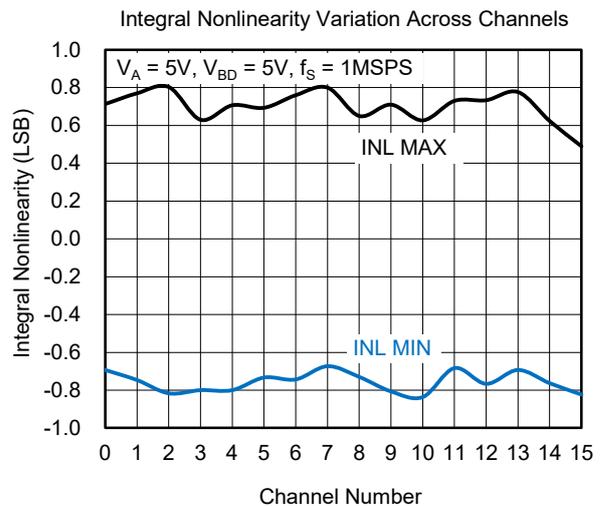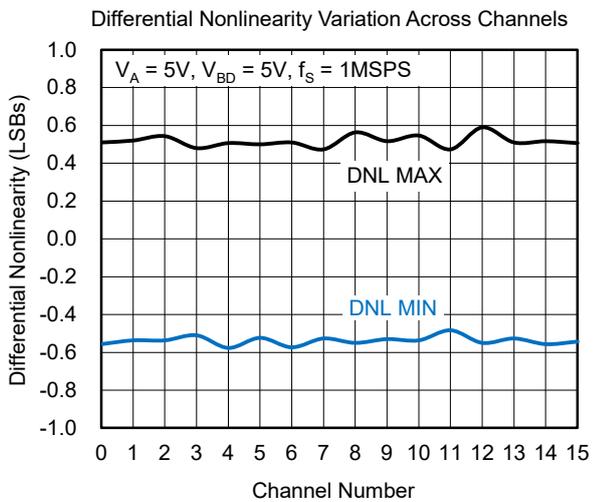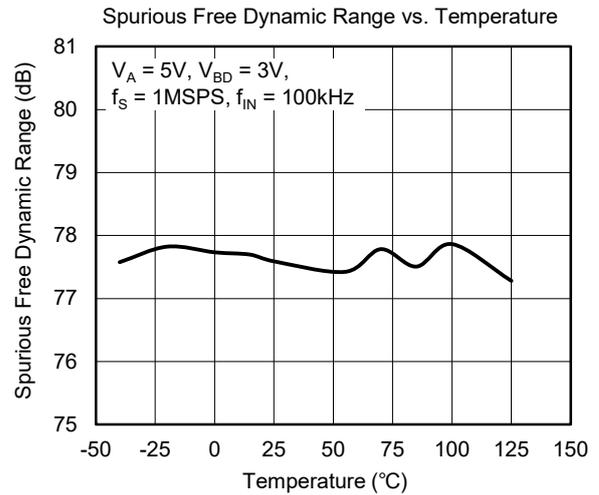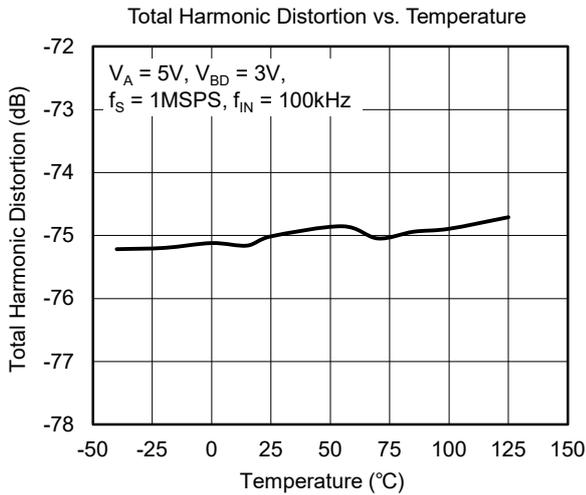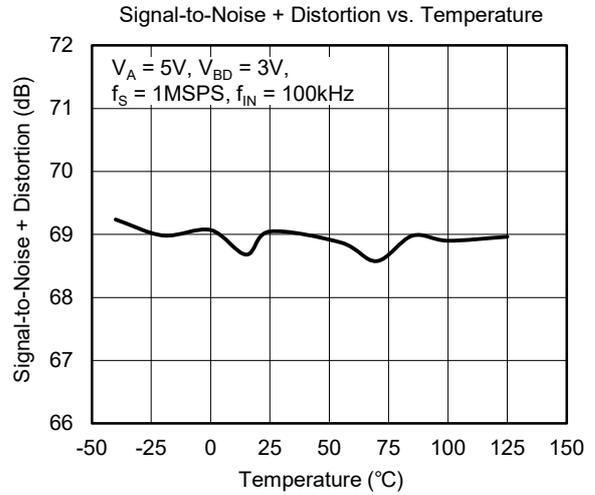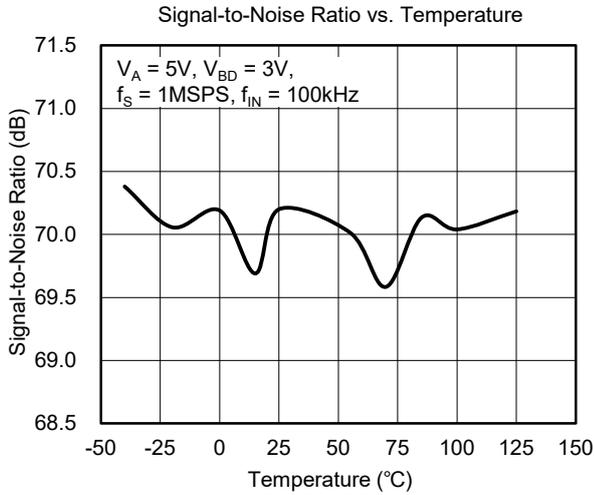




TYPICAL PERFORMANCE CHARACTERISTICS (continued)

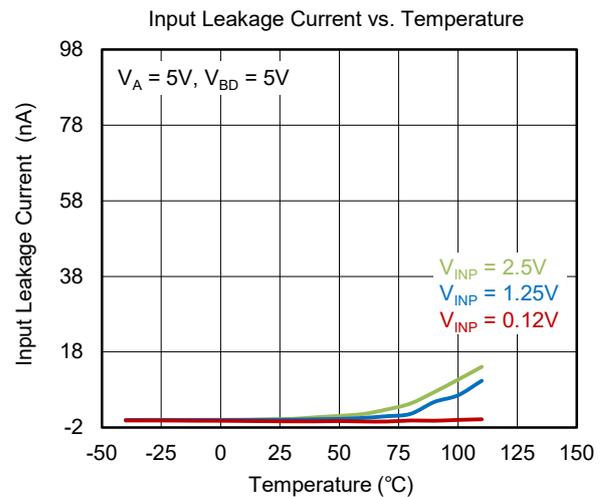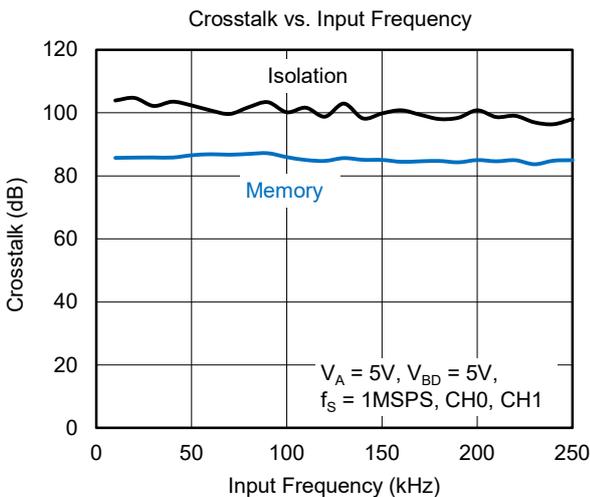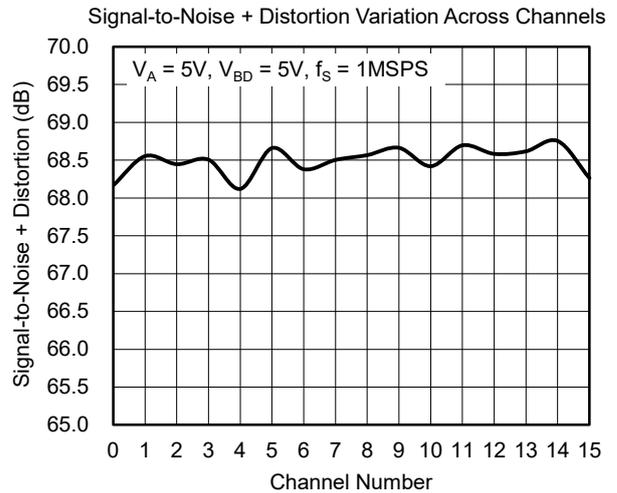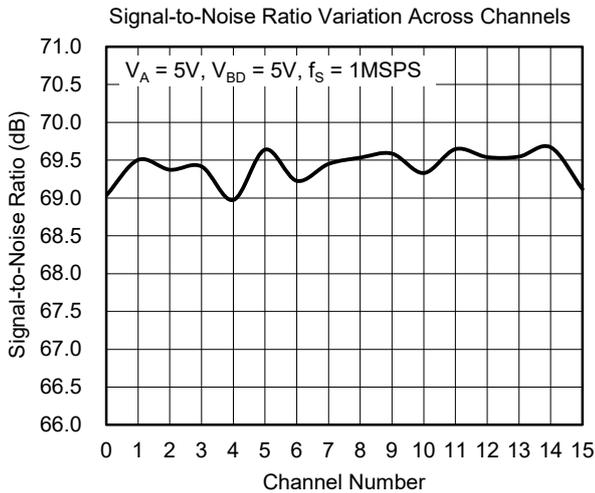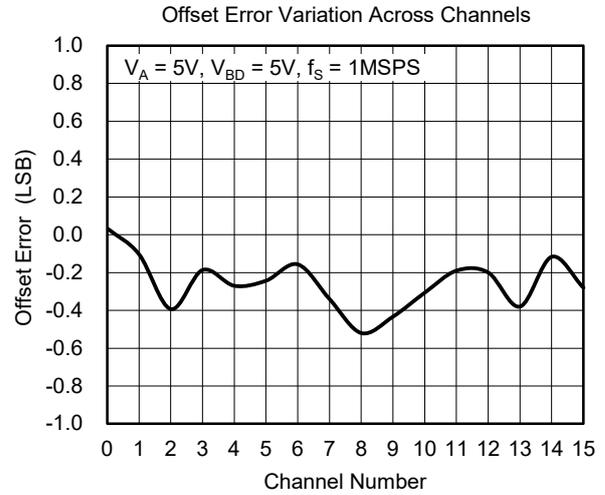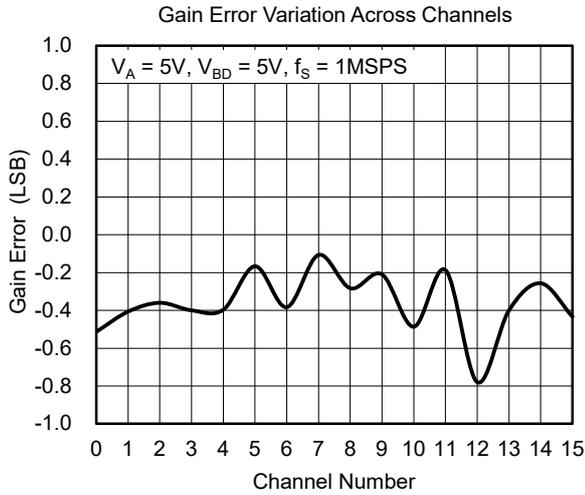


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

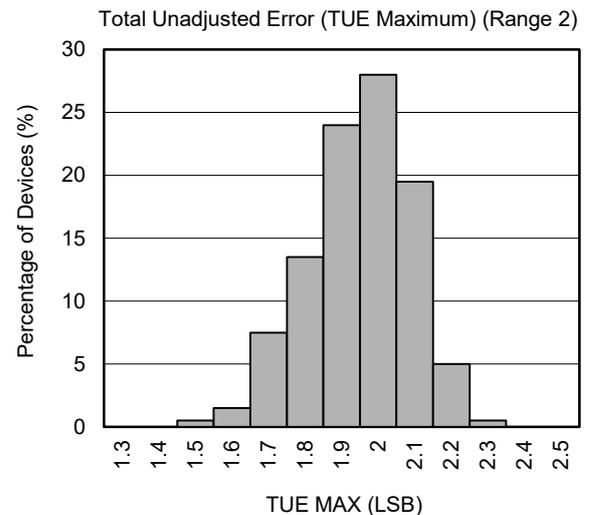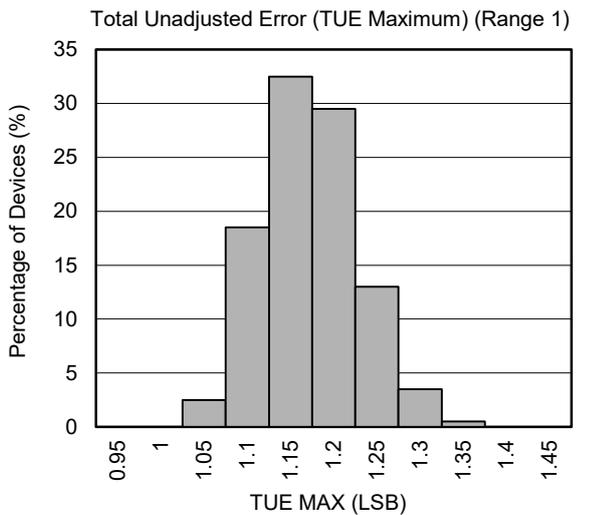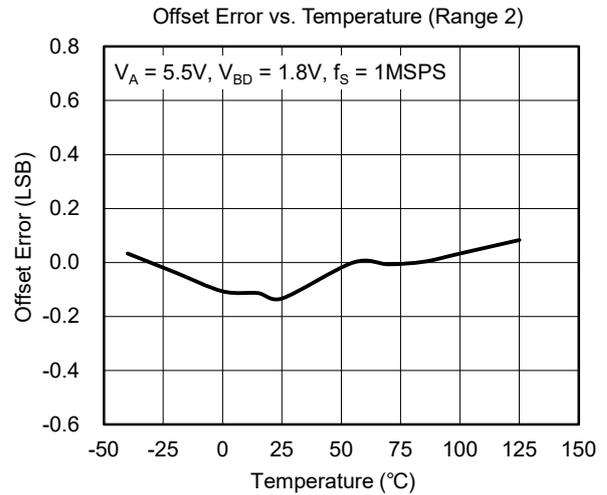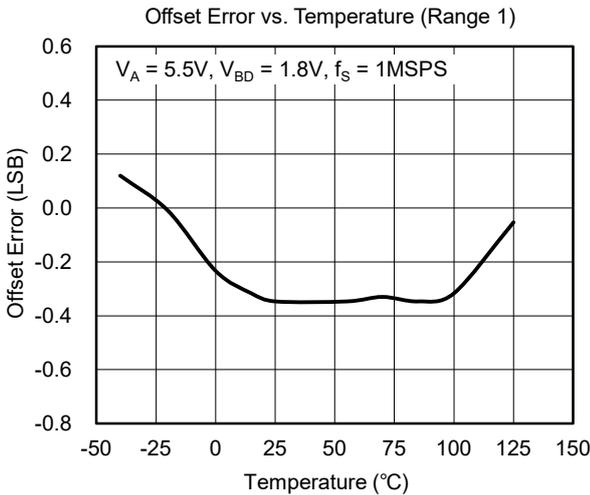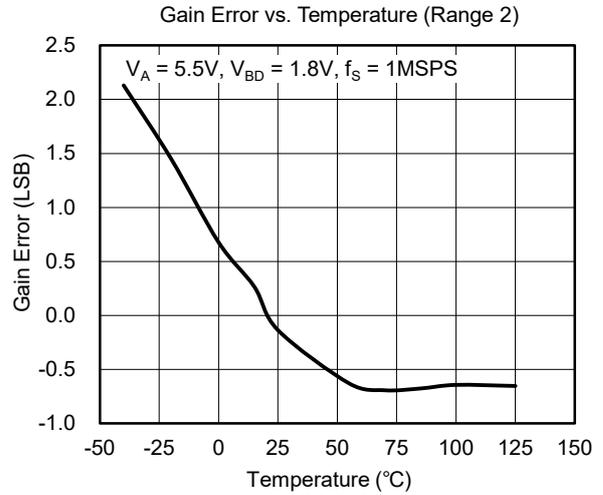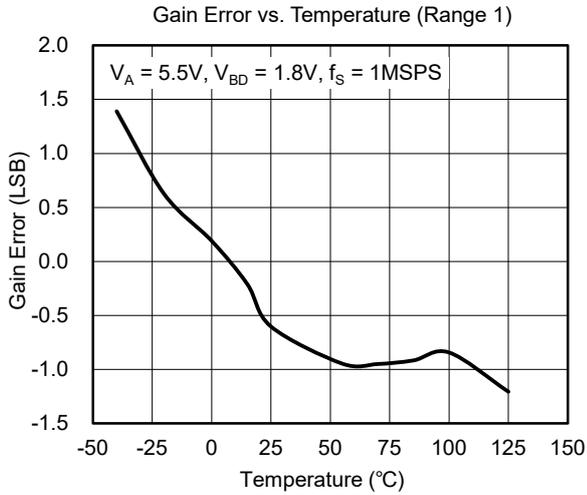

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

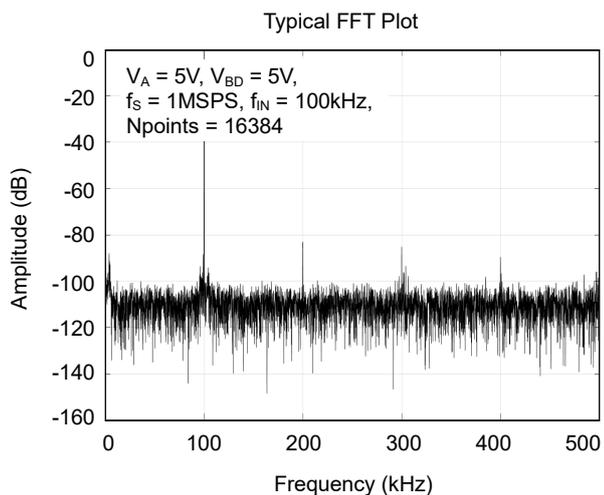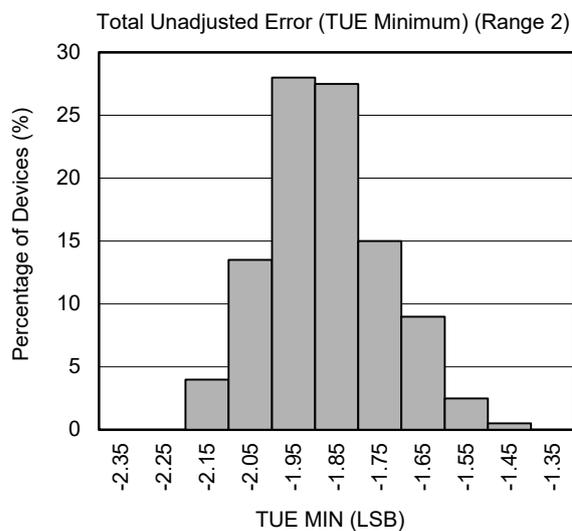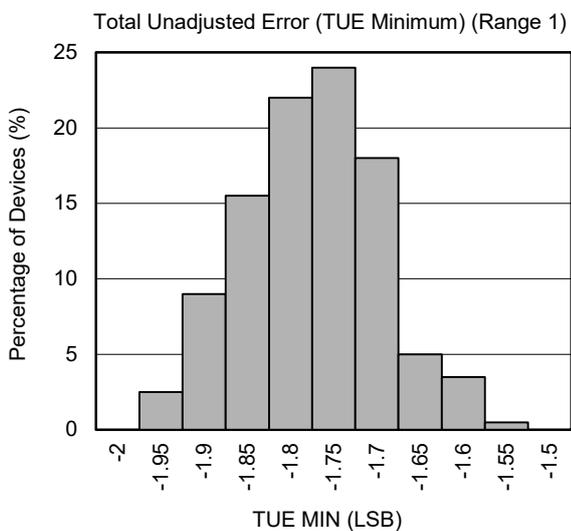

FUNCTIONAL BLOCK DIAGRAM

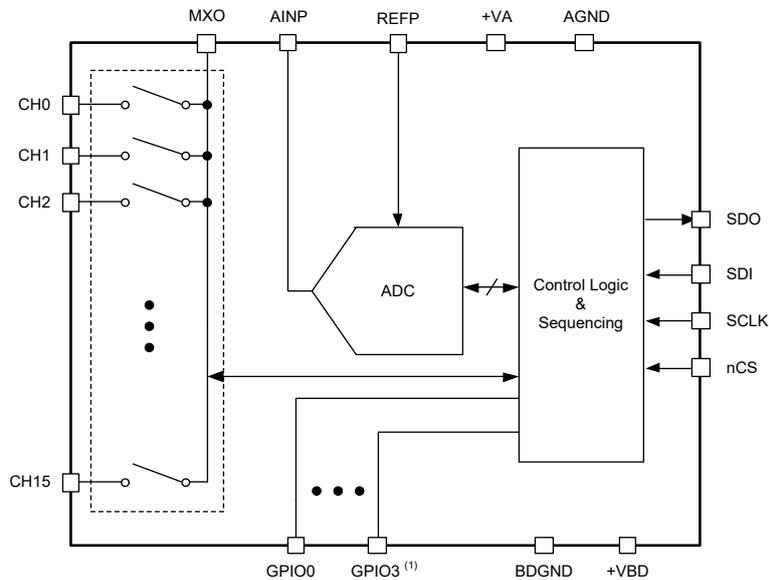

NOTE:  
1. Four GPIOs for TSSOP package and one GPIO for TQFN package.

Figure 3. Block Diagram

TYPICAL APPLICATION CIRCUIT

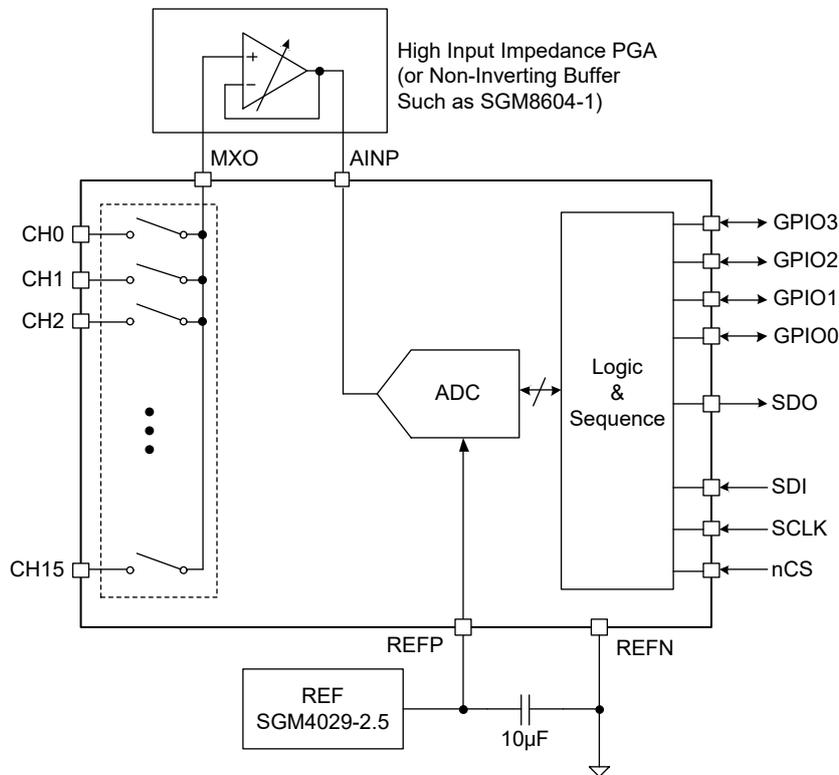


Figure 4. Typical Application Circuit

## DETAILED DESCRIPTION

### Overview

The SGM5200 is a 12-bit, SAR ADC. It needs an external voltage reference. An Amplifier can be used between MXO and AINP for signal conditioning. Figure 1 and Figure 2 show the chip operating time sequences.

The SGM5200 output data is composed of 4-bit channel address and 12-bit ADC conversion result. To read and write GPIOs, more details refer to Table 1, Table 2 and Table 5.

The SGM5200 switches to new multiplexer channel on the 2<sup>nd</sup> falling edge of SCLK. The input acquisition phase (equal input capacitor starts charging) begins on the 14<sup>th</sup> falling edge of SCLK. The input signal is sampled on the nCS falling edge.

The TSSOP package of the SGM5200 has four general-purpose IO (GPIO) pins, and the TQFN package has one GPIO pin.

The chip refreshes the GPIO status (Input and output) at the nCS falling edge. The GPI data will be in the same frame starting with the nCS falling edge (if GPI read enabled).

The operating time sequence is shown in Figure 2, the falling edge of nCS clocks out DO15, the remain bits are shifted out on the falling edge of SCLK. The ADC result is a 12-bit binary data, MSB is shifted out on the 4<sup>th</sup> falling edge of SCLK, and LSB is shifted out on the 15<sup>th</sup> falling edge of SCLK. Refer to Figure 2, when the ADC conversion ends on the 16<sup>th</sup> SCLK falling edge, SDO goes to 3-state. The chip 16-bit data (on SDI pin) is shifted in on the every rising edge of SCLK.

The SGM5200 has threshold alarm function per channel. If ADC results exceed these limits (high and low), the chip can give alert on GPIO0/GPIO1 pins (detail configurations in Table 9). If there is an alarm, the alert will be set on the 12<sup>th</sup> SCLK falling edge in the same frame of ADC conversion in progress. It will reset on the 10<sup>th</sup> SCLK falling edge in the next frame.

### Reference

The SGM5200 needs an external reference.

### Power Saving

The SGM5200 provides two kinds of ways to power down the chip. The first way is command control. It depends on setting DI5 = '1', more details see Table 1, Table 2 and Table 5. If DI5 is set, the chip will be powered down on the

16<sup>th</sup> falling edge of SCLK in the next frame. If DI5 is reset, the chip will be powered up on the nCS falling edge. The second way is asynchronous control by GPIO3. GPIO3 can be configured as an nPD input (see Table 9). Its output is active low. The chip goes to power-down at same time when nPD is '0'. The chip will be powered up when nPD is '1'.

## Device Functional Modes

### Channel Sequencing Modes

The SGM5200 has three channel sequencing modes: manual mode, auto-1 mode and auto-2 mode. Mode selection is configured by the mode control register (see Table 1, Table 2 and Table 5). The new channel selection is valid on the 2<sup>nd</sup> SCLK falling edge in the next frame in all three modes (refer to Figure 1).

Once the chip is configured to working in a selected mode, it keeps working in this mode until the chip is powered down, reset or reprogrammed. Allows it to exit multiple times and re-enter this mode without disturbing program register settings.

#### Manual Mode

When power-up or after reset the default channel is 'channel 0' and the default mode is manual mode.

#### Auto-1 Mode

In auto-1 mode, the chip scans all selected channels in ascending order. The selected channels are configured in a program register. The auto-1 program register setting is shown in Table 3 and Table 4. The auto-1 program register is reset to '0hFFFF'.

#### Auto-2 Mode

In auto-2 mode, the chip scans all selected channels from channel 0 to the last channel. The last channel is configured in a program register. The auto-2 program register setting is shown in Table 6. The auto-2 program register are reset to '0hF'.

## Device Programming and Mode Control

The chip has two kinds of registers named mode registers and program registers.

### Power-Up Sequence

After power-up, the chip is in default manual mode and channel 0 is set as default channel. User needs to configure program register and mode register to set the chip working in target mode.

DETAILED DESCRIPTION (continued)

Operating in Manual Mode

The mode control register settings for manual mode are shown in Table 1. In manual mode, no program register is required.

The example for the chip how to work in manual mode and scan channels CH3, CH5 and CH7 is shown in Figure 5. In this sequence, in the frame N manual mode and channel CH3 is selected. In the frame N+1, keep in manual mode

and channel CH5 is selected, internal MUX is switched to channel CH3 on the 2<sup>nd</sup> falling edge of SCLK. In the frame N+2, keep in manual mode and channel CH7 is selected, on the falling edge of nCS, channel CH3 input signal is sampling and conversion result is sent out in this frame, internal MUX is switched to CH5. And the chip repeats this sequence and sends out ADC conversion result data of CH5 and CH7 in the following two frames.

Table 1. Mode Control Register Details for Manual Mode

BITS	DESCRIPTION	RESET STATE						
DI[15:12]	0001 = Selects manual mode	0001						
DI11	0 = Chip retains values of DI[6:0] from the previous frame 1 = Enables programming of bits DI[6:0]	0						
DI[10:7]	The 4-bit data means the next channel address to be selected in the next frame. DI10 is MSB and DI7 is LSB. For example, 0000 = channel 0, 0001 = channel 1 and so on.	0000						
DI6	0 = Selects 0V to V <sub>REF</sub> input range (Range 1) 1 = Selects 0V to 2 × V <sub>REF</sub> input range (Range 2)	0						
DI5	0 = Normal operation (no power-down). 1 = Powers down on the 16 <sup>th</sup> SCLK falling edge.	0						
DI4	0 = SDO outputs current channel address of the channel on DO[15:12], and the 12-bit conversion results on DO[11:0] 1 = GPIO3 to GPIO0 data (both input and output) corresponds to DO[15:12] in the following order as shown. Lower data bits DO[11:0] means 12-bit conversion result for the current channel	0						
	<table border="1"> <tr> <td>DO15</td> <td>DO14</td> <td>DO13</td> <td>DO12</td> </tr> <tr> <td>GPIO3<sup>(1)</sup></td> <td>GPIO2<sup>(1)</sup></td> <td>GPIO1<sup>(1)</sup></td> <td>GPIO0<sup>(1)</sup></td> </tr> </table>		DO15	DO14	DO13	DO12	GPIO3 <sup>(1)</sup>	GPIO2 <sup>(1)</sup>
DO15	DO14	DO13	DO12					
GPIO3 <sup>(1)</sup>	GPIO2 <sup>(1)</sup>	GPIO1 <sup>(1)</sup>	GPIO0 <sup>(1)</sup>					
DI[3:0]	GPIO data of the channels is used as output. The data of the channel configured as input will be ignored by the device. The SDI bits and corresponding GPIO are shown below.	0000						
	<table border="1"> <tr> <td>DI3</td> <td>DI2</td> <td>DI1</td> <td>DI0</td> </tr> <tr> <td>GPIO3<sup>(1)</sup></td> <td>GPIO2<sup>(1)</sup></td> <td>GPIO1<sup>(1)</sup></td> <td>GPIO0<sup>(1)</sup></td> </tr> </table>		DI3	DI2	DI1	DI0	GPIO3 <sup>(1)</sup>	GPIO2 <sup>(1)</sup>
DI3	DI2	DI1	DI0					
GPIO3 <sup>(1)</sup>	GPIO2 <sup>(1)</sup>	GPIO1 <sup>(1)</sup>	GPIO0 <sup>(1)</sup>					

NOTE: 1. GPIO1 to GPIO3 are available only for TSSOP package. TQFN packaged device offers GPIO0 only.

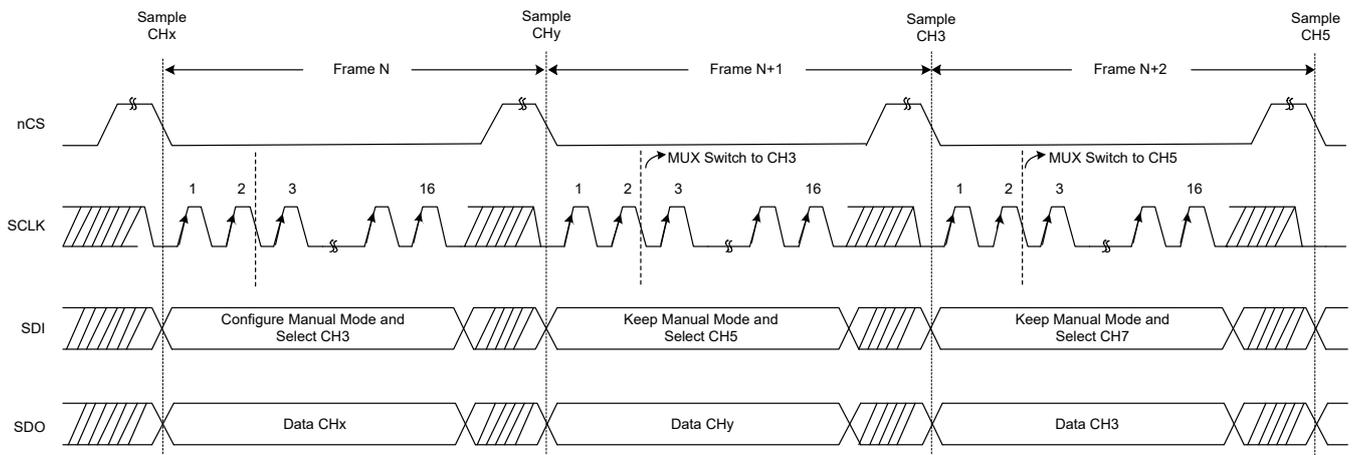


Figure 5. Example for Manual Mode Timing Diagram

## DETAILED DESCRIPTION (continued)

## Operating in Auto-1 Mode

The mode control register settings for auto-1 mode are shown in Table 2. There are both mode registers and program registers for auto-1 mode operation.

To let the chip work in auto-1 mode, it is necessary to configure auto-1 program register firstly to select which channels are going to be scanned.

The program register settings for auto-1 mode are shown in Table 3 and Table 4.

Before running in auto-1 mode, the target channels CH2, CH3 and CH5 (examples) must be configured in auto-1 program registers (details see auto-1 program registers configuration sequence).

The example for the chip how to work in auto-1 mode and scan channels CH2, CH3 and CH5 automatically is shown in Figure 6. In this sequence, in the frame N sent entering auto-1 mode command and channel CH2 is selected automatically (the chip find the first selected channel in ascending order automatically). In the frame N+1, the chip switches MUX to CH2. In the frame N+2, the chip samples

the CH2 input and gives out ADC conversion result, and the MUX is switched to CH3 automatically. In the frame N+3, the chip samples CH3 and gives out ADC conversion results, and the MUX is switched to CH5 automatically, and so on. This process repeats until the last selected channel is reached, and the process loops back from the first selected channel.

In any case, re-entering auto-1 mode (It may be from auto-1 mode, manual mode and auto-2 mode) will cause the chip channel scan sequence restarts from the first selected channel.

Note that changing the auto-1 program register during the chip is working in auto-1 mode, the chip scan restarts from the first selected channel in ascending.

Figure 7 shows how the auto-1 program registers is configured. It is used to pre-select the channels for auto-1 scanning. It needs two operation frames for a complete configuration. More setting details are shown in Table 3 and Table 4.

Table 2. Mode Control Register Details for Auto-1 Mode

BITS	DESCRIPTION				RESET STATE
DI[15:12]	0010 = Selects auto-1 mode				0001
DI11	0 = Chip retains values of DI[10:0] from previous frame 1 = Enables programming of bits DI[10:0]				0
DI10	0 = The channel counter increments every conversion (no reset) 1 = The channel counter is reset to the lowest programmed channel in the auto-1 program register				0
DI[9:7]	xxx = Do not care				000
DI6	0 = Selects 0V to $V_{REF}$ input range (Range 1) 1 = Selects 0V to $2 \times V_{REF}$ input range (Range 2)				0
DI5	0 = Normal operation (no power-down). 1 = Powers down on the 16 <sup>th</sup> SCLK falling edge.				0
DI4	0 = SDO outputs current channel address of the channel on DO[15:12], and the 12-bit conversion results on DO[11:0] 1 = GPIO3 to GPIO0 data (both input and output) corresponds to DO[15:12] in the following order as shown. Lower data bits DO[11:0] means 12-bit conversion result for the current channel				0
	DO15	DO14	DO13	DO12	
	GPIO3 <sup>(1)</sup>	GPIO2 <sup>(1)</sup>	GPIO1 <sup>(1)</sup>	GPIO0 <sup>(1)</sup>	
DI[3:0]	GPIO data of the channels is used as output. The data of the channel configured as input will be ignored by the device. The SDI bits and corresponding GPIO are shown below.				0000
	DI3	DI2	DI1	DI0	
	GPIO3 <sup>(1)</sup>	GPIO2 <sup>(1)</sup>	GPIO1 <sup>(1)</sup>	GPIO0 <sup>(1)</sup>	

NOTE: 1. GPIO1 to GPIO3 are available only for TSSOP package. TQFN packaged device offers GPIO0 only.

DETAILED DESCRIPTION (continued)


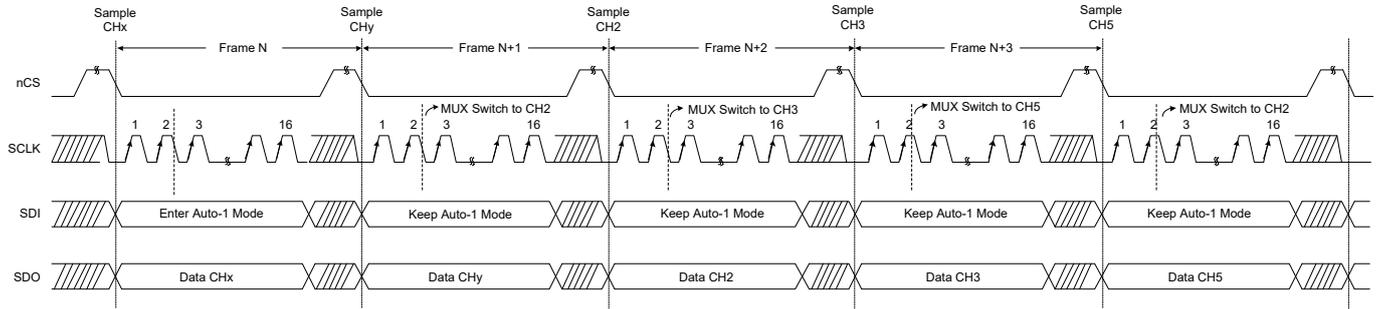


Figure 6. Example for Auto-1 Mode Timing Diagram

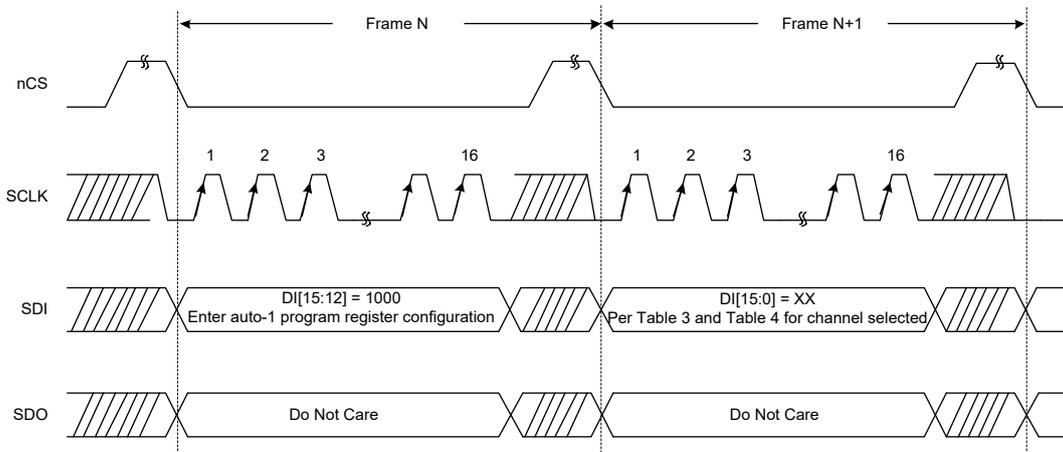

NOTE: During the programming process, the chip continues to run in the selected mode. The SDO is valid, but it is impossible to change the range or write GPIO data to the device during programming.

Figure 7. Auto-1 Program Register Setting

Table 3. Program Register Details for Auto-1 Mode

BITS	DESCRIPTION	RESET STATE
<b>Frame 1</b>		
DI[15:12]	1000 = Enters the sequence of auto-1 program. Configuration is done in the next frame	NA
DI[11:0]	Do not care.	NA
<b>Frame 2</b>		
DI[15:0]	1 (Individual Bit) = According bit is set to '1' means the according channel is selected in scanning sequence. The channel numbers are one-to-one associated with the SDI bits. For example, DI15 corresponds to CH15, DI14 corresponds to CH14 ... DI10 corresponds to CH0 0 (Individual Bit) = According bit is set to '0' means the according channel is skipped in scanning sequence. The channel numbers are one-to-one associated with the SDI bits. For example, DI15 corresponds to CH15, DI14 corresponds to CH14 ... DI10 corresponds to CH0	All '1'

Table 4. Channels Mapping to SDI Bits for the SGM5200

Device <sup>(1)</sup>	SDI Bits															
	DI15	DI14	DI13	DI12	DI11	DI10	DI9	DI8	DI7	DI6	DI5	DI4	DI3	DI2	DI1	DI0
16 Chan	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0	1/0

NOTE:  
1. The chip only scans the selected channels when in auto-1 mode.

**DETAILED DESCRIPTION (continued)**

**Operating in Auto-2 Mode**

The mode control register settings for auto-2 mode are shown in Table 5. There are both mode registers and program registers for auto-1 mode operation.

To let the chip work in auto-2 mode, it is necessary configure auto-2 program register firstly to configure the last channel which is going to be reached.

The program register settings for auto-2 mode are shown in Table 6.

Before running in auto-2 mode, the last target channel CH2 (example) must be configured in auto-2 program registers (details see auto-2 program registers configuration sequence).

The example about the chip how to work in auto-2 mode and scan channels CH0, CH1 and CH2 automatically is shown in Figure 8. In this sequence, in the frame N sent entering auto-2 mode command and channel CH0 is selected automatically (the chip switches to CH0 automatically). In the frame N+1, the chip switches MUX to

CH02. In the frame N+2, the chip samples the CH0 input and gives out ADC conversion result, and the MUX is switched to CH1 automatically. In the frame N+3, the chip samples CH1 and gives out ADC conversion, and the MUX is switched to CH2 automatically, and so on. This process repeats until the last selected channel is reached (In this example, the last channel is CH2), and the process loops back from channel CH0.

In any case, re-entering auto-2 mode possibly from auto-1 mode, manual mode and auto-2 mode will cause the chip channel scan sequence to restart from the channel CH0.

Note that changing the auto-2 program register during the chip is working in auto-2 mode, the chip scan restarts from channel CH0.

Figure 9 shows how the auto-2 program registers is configured. It's for pre-select the last channel for auto-2 scanning. It needs one operation frames for a complete configuration. Refer to Table 6 for more setting details

**Table 5. Mode Control Register Details for Auto-2 Mode**

BITS	DESCRIPTION				RESET STATE
DI[15:12]	0011 = Selects auto-2 mode				0001
DI11	0 = Chip retains values of DI[10:0] from the previous frame 1 = Enables programming of bits DI[10:0]				0
DI10	0 = Channel counter increments every conversion (no reset) 1 = Channel number is reset to CH0				0
DI[9:7]	xxx = Do not care				000
DI6	0 = Selects V <sub>REF</sub> input range (Range 1) 1 = Selects 2 × V <sub>REF</sub> input range (Range 2)				0
DI5	0 = Normal operation (no power-down) 1 = Powers down on the 16 <sup>th</sup> SCLK falling edge				0
DI4	0 = SDO outputs current channel address of the channel on DO[15:12], and the 12-bit conversion results on DO[11:0] 1 = GPIO3 to GPIO0 data (both input and output) corresponds to DO[15:12] in the following order as shown. Lower data bits DO[11:0] means 12-bit conversion result for the current channel				0
	DO15	DO14	DO13	DO12	
	GPIO3 <sup>(1)</sup>	GPIO2 <sup>(1)</sup>	GPIO1 <sup>(1)</sup>	GPIO0 <sup>(1)</sup>	
DI[3:0]	GPIO data of the channels is used as output. The data of the channel configured as input will be ignored by the device. The SDI bits and corresponding GPIO are shown below.				0000
	DI3	DI2	DI1	DI0	
	GPIO3 <sup>(1)</sup>	GPIO2 <sup>(1)</sup>	GPIO1 <sup>(1)</sup>	GPIO0 <sup>(1)</sup>	

NOTE: 1. GPIO1 to GPIO3 are available only for TSSOP package. TQFN packaged device offers GPIO0 only.

DETAILED DESCRIPTION (continued)


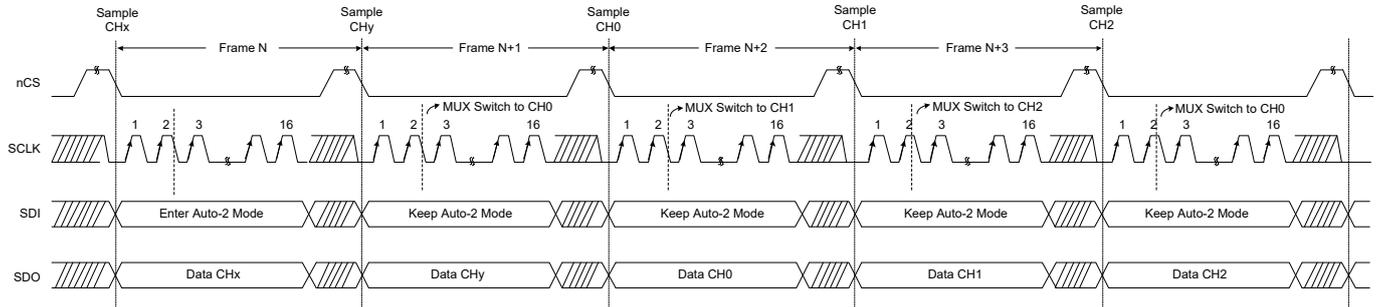


Figure 8. Example for Auto-2 Mode Timing Diagram

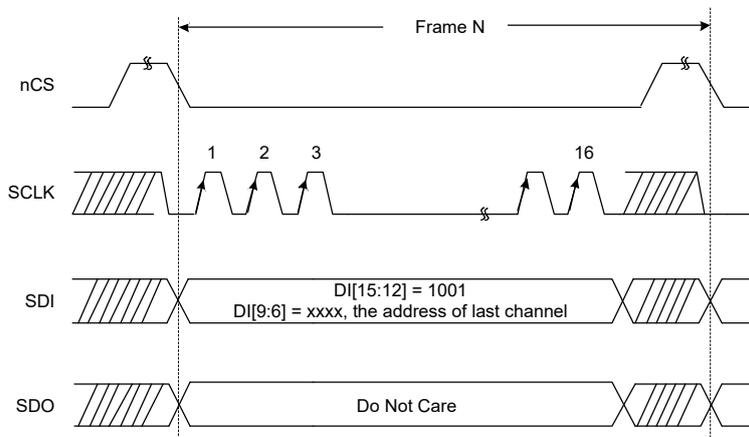

NOTE: During the programming process, the chip continues to run in the selected mode. The SDO is valid, but it is impossible to change the range or write GPIO data to the device during programming.

Figure 9. Auto-2 Program Register Setting

Table 6. Program Register Details for Auto-2 Mode

BITS	DESCRIPTION	RESET STATE
DI[15:12]	1001 = Configure auto-2 program register	NA
DI[11:10]	Do not care.	NA
DI[9:6]	aaaa = The 4-bit data means the address of the last channel in the scanning sequence. In auto-2 mode, the channel counter begins at CH0, increasing each frame until equal to 'aaaa'. The channel counter roles over to CH0 in the next frame	NA
DI[5:0]	Do not care.	NA

Continued Operation in a Selected Mode

When the chip is configured to working in one mode, the user may want to keep working in this mode. How to continue operating in a selected mode is shown in Table 7.

Table 7. Continued Operation in a Selected Mode

BITS	DESCRIPTION	RESET STATE
DI[15:12]	0000 = The chip continues to operate in current mode. When in auto-1 and auto-2 modes, the channel counter increments automatically; when in the manual mode, it continues with the last selected channel. The chip ignores datas on DI[11:0] and continues operating with the previous settings. SDI can be held low when there is no changes are required in the mode control register	0001
DI[11:0]	Chip ignores these bits when DI[15:12] is '0000'.	All '0'

DETAILED DESCRIPTION (continued)

Programming

Digital Output

Table 8 shows the theory output codes according to different input ranges. The ADC codes are in straight binary format.

GPIO Registers

The GPIO pins can be used as GPO (general-purpose output) or GPI (general-purpose input).


The GPIO functions and GPO status are set in GPIO program registers, more details refer to Table 9.

The GPO refresh include two steps, first step setting in operation frame N, second steps the chip refresh GPO data on the nCS falling edge in frame N+1. More details refer to Figure 10.

The chip samples the GPI input on the falling edge of nCS in frame N, and outputs GPI data on SDO in the same frame N.

Table 8. Ideal Input Voltages and Output Codes

Description	Analog Value		Digital Output Straight Binary	
	Range 1 → V <sub>REF</sub>	Range 2 → 2 × V <sub>REF</sub>	Binary Code	Hex Code
Least Significant Bit (LSB)	V <sub>REF</sub> /4096	2 × V <sub>REF</sub> /4096		
Full Scale	V <sub>REF</sub> - 1LSB	2 × V <sub>REF</sub> - 1LSB	1111 1111 1111	FFF
Midscale	V <sub>REF</sub> /2	V <sub>REF</sub>	1000 0000 0000	800
Midscale - 1LSB	V <sub>REF</sub> /2 - 1LSB	V <sub>REF</sub> - 1LSB	0111 1111 1111	7FF
Zero	0V	0V	0000 0000 0000	000

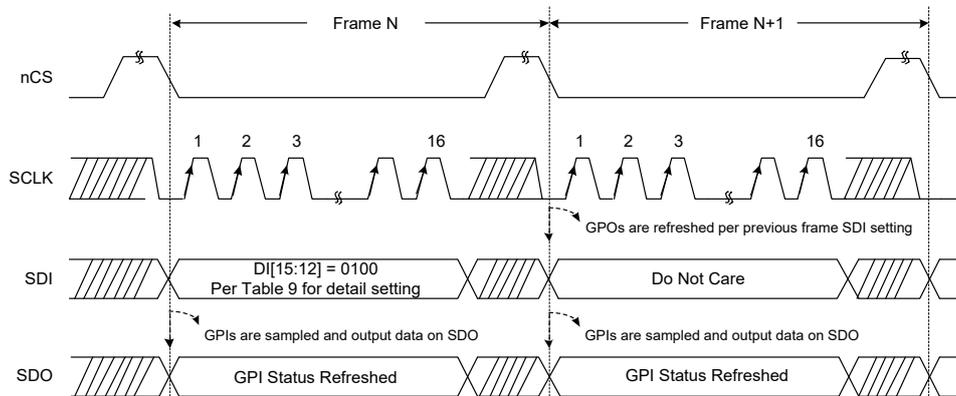

NOTE: During the programming process, the chip continues to run in the selected mode. The SDO is valid, but it is impossible to change the range or write GPIO data to the device during programming.

Figure 10. GPIO Program Register Setting

**DETAILED DESCRIPTION (continued)**

**Table 9. GPIO Program Register Details**

BITS	DESCRIPTION	RESET STATE
DI[15:12]	0100 = Selects GPIO program registers for programming	NA
DI[11:10]	00 = Reserved bits, must be '00'	00
DI9	0 = Normal operation 1 = Resets all registers in the next nCS frame to default value (it also resets itself)	0
DI8	0 = GPIO3 is still as general-purpose I/O. Program 0 for TQFN packaged device 1 = Configures GPIO3 as the chip power-down input	0
DI7	0 = GPIO2 is still as general-purpose I/O. Program 0 for TQFN packaged device 1 = Configures GPIO2 as device range input	0
DI[6:4]	000 = GPIO1 and GPIO0 are still as general-purpose I/Os. Valid setting for TQFN packaged device xx1 = Configures GPIO0 as 'high or low' alarm output. It is an active high output. GPIO1 is still as general-purpose I/O. Valid setting for TQFN packaged device 010 = Configures GPIO0 as high alarm output. It is an active high output. GPIO1 is still as general-purpose I/O. Valid setting for TQFN packaged device 100 = Configures GPIO1 as low alarm output. It is an active high output. GPIO0 is still as general-purpose I/O. Configuration is not valid for TQFN packaged device 110 = Configures GPIO1 as low alarm output and GPIO0 as a high alarm output. These are active high outputs. Configuration is not valid for TQFN packaged device	000
DI3 <sup>(1)</sup>	0 = GPIO3 pin is configured as GPI (general-purpose input). Setting is not valid for TQFN packaged device 1 = GPIO3 pin is configured as GPO (general-purpose output). Program '1' for TQFN packaged device	0
DI2 <sup>(1)</sup>	0 = GPIO2 pin is configured as GPI. Setting is not valid for TQFN packaged device 1 = GPIO2 pin is configured as GPO. Program '1' for TQFN packaged device	0
DI1 <sup>(1)</sup>	0 = GPIO1 pin is configured as GPI. Setting is not valid for TQFN packaged device 1 = GPIO1 pin is configured as GPO. Program '1' for TQFN packaged device	0
DI0 <sup>(1)</sup>	0 = GPIO0 pin is configured as GPI. Valid setting for TQFN packaged device 1 = GPIO0 pin is configured as GPO. Valid setting for TQFN packaged device	0

**NOTE:**

1. The bits are valid for GPIOs that are not assigned a specific function by bits DI[8:4].

**Alarm Thresholds for GPIO Pins**

Each channel has separate high alarm threshold and low alarm threshold. To configure chip quickly, the input channels are divided into 4 groups, each group can be programmed consecutively (8 registers are programmed in one sequence).

In Table 10, the chip has its input channels divide into 4 groups.

Table 11 shows details of the alarm program register.


Each group needs 9 operation frames to complete the alarm thresholds configuration. The chip supports quit the configuration sequence in middle of progress (DI12 in alarm program register is enabled, and < 8 registers is configured).

Once DI12 is enabled, the chip quits the configuration sequence in the next frame.

**Table 10. Alarm Program Registers Groups**

Group	Alarm Program Register DI[15:12]	Registers
0	1100	High and low alarm for CH0, CH1, CH2 and CH3
1	1101	High and low alarm for CH4, CH5, CH6 and CH7
2	1110	High and low alarm for CH8, CH9, CH10 and CH11
3	1111	High and low alarm for CH12, CH13, CH14 and CH15

DETAILED DESCRIPTION (continued)

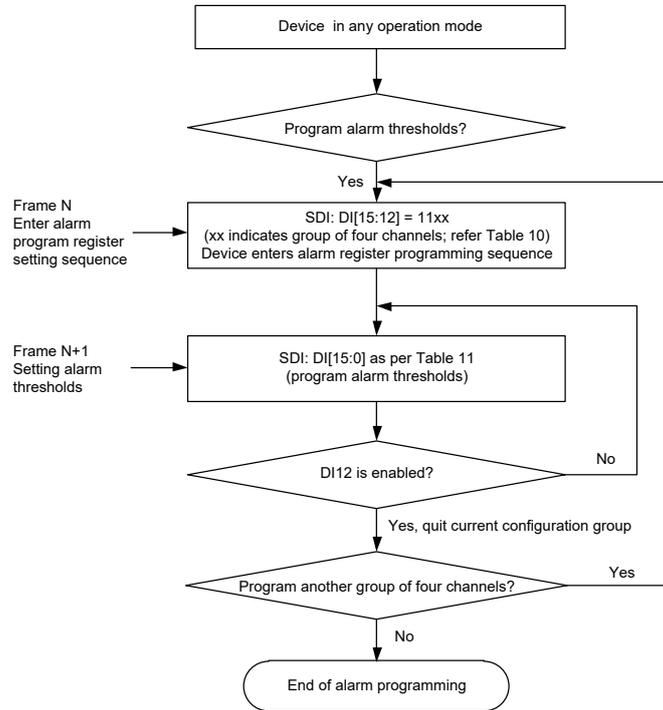

NOTE: During the programming process, the chip continues to run in the selected mode. The SDO is valid, but it is impossible to change the range or write GPIO data to the device during programming.

Figure 11. Alarm Program Register Programming Flowchart


Table 11. Alarm Program Register Details

BITS	DESCRIPTION	RESET STATE
<b>Frame 1</b>		
DI[15:12]	1100 = Alarm programming sequence for group 0 1101 = Alarm programming sequence for group 1 1110 = Alarm programming sequence for group 2 1111 = Alarm programming sequence for group 3 Note: DI[15:12] = 11AA is the alarm programming request for group AA. "AA" means the alarm programming group number in binary format.	NA
DI[11:0]	Do not care.	NA
<b>Frame 2 and Onwards</b>		
DI[15:14]	CC = "CC" means the channel number in binary format in group AA (each group has 4 channels) The SGM5200 programs the alarm for the channel represented by the binary number "AACC". "AA" is programmed in Frame 1.	NA
DI13	0 = Configure low alarm register 1 = Configure high alarm register	NA
DI12	0 = Continue alarm programming sequence in the next frame 1 = Exit alarm programming in the next frame Note: To quit the threshold configure sequence if all threshold registers have been configured, DI12 must be set to '1' to quit.	NA
DI[11:10]	Do not care.	NA
DI[9:0]	The 10-bit alarm threshold is compared with the upper 10-bit of the 12-bit conversion result.	'1111111111' for high alarm register and '0000000000' for low alarm register

**DETAILED DESCRIPTION (continued)**

**Analog Input**

Figure 12 shows the equivalent circuit model for the MUX and ADC.

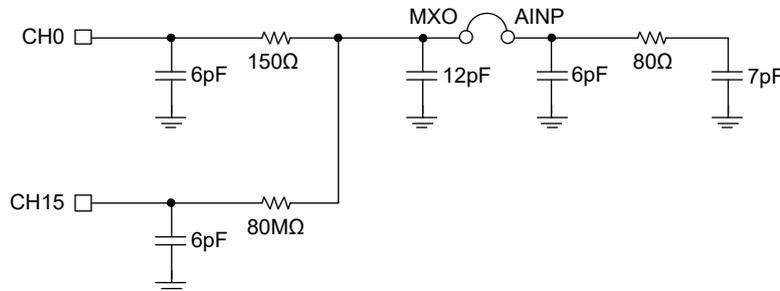

NOTE: CH0 is assumed to be on, and CH15 is assumed to be off.

**Figure 12. Equivalent Circuit for ADC and MUX**



**REVISION HISTORY**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



SEPTMBER 2022 – REV.A to REV.A.1	Page
Update Electrical Characteristics section .....	5
Changes from Original (SEPTEMBER 2021) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

TSSOP-38

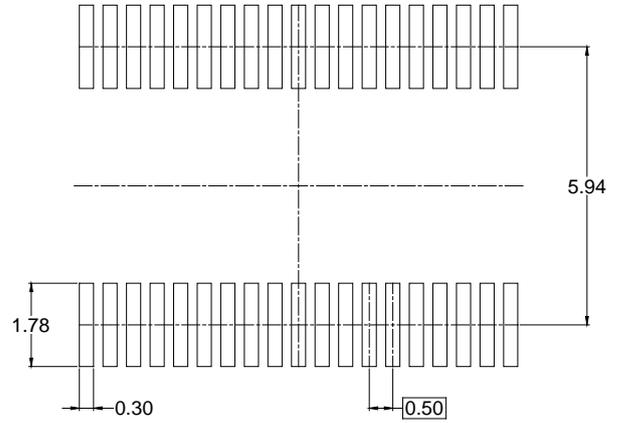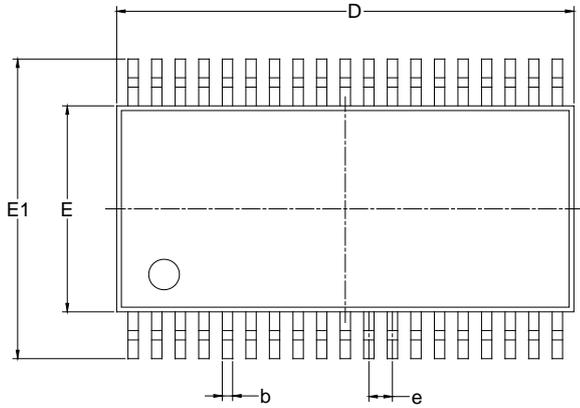

RECOMMENDED LAND PATTERN (Unit: mm)

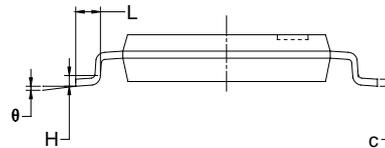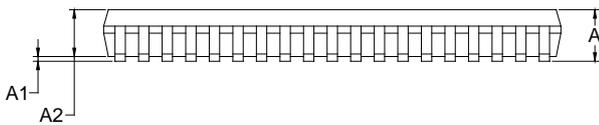

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.000	0.031	0.039
b	0.170	0.270	0.007	0.011
c	0.090	0.200	0.004	0.008
D	9.600	9.800	0.378	0.386
E	4.300	4.500	0.169	0.177
E1	6.250	6.550	0.246	0.258
e	0.500 BSC		0.020 BSC	
H	0.250 TYP		0.010 TYP	
L	0.450	0.750	0.018	0.030
θ	1°	7°	1°	7°


NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.


# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS


### TQFN-5x5-32L




TOP VIEW

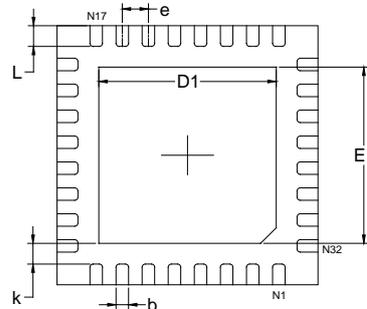

BOTTOM VIEW

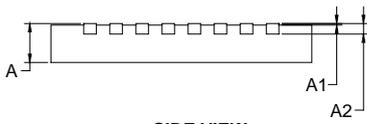

SIDE VIEW

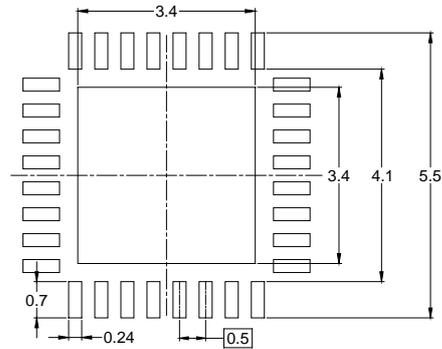


RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A2	0.203 REF		0.008 REF	
D	4.924	5.076	0.194	0.200
D1	3.300	3.500	0.130	0.138
E	4.924	5.076	0.194	0.200
E1	3.300	3.500	0.130	0.138
k	0.200 MIN		0.008 MIN	
b	0.180	0.300	0.007	0.012
e	0.500 TYP		0.020 TYP	
L	0.324	0.476	0.013	0.019


NOTE: This drawing is subject to change without notice.

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

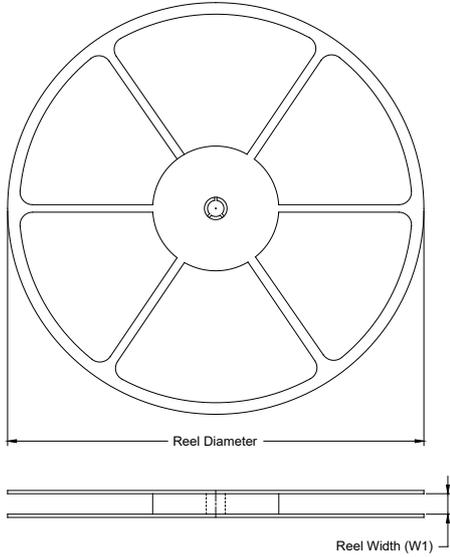

### TAPE DIMENSIONS

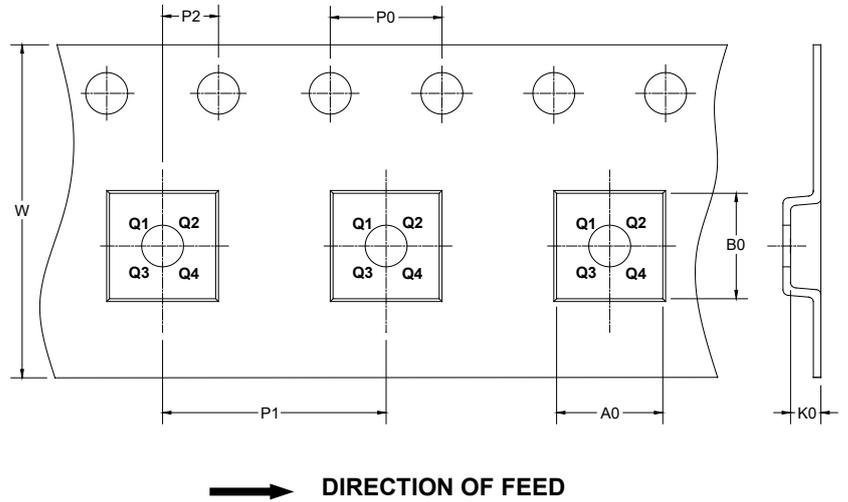

NOTE: The picture is only for reference. Please make the object as the standard.


### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TSSOP-38	13"	16.4	6.80	10.20	1.60	4.0	8.0	2.0	16.0	Q1
TQFN-5×5-32L	13"	12.4	5.30	5.30	1.10	4.0	8.0	2.0	12.0	Q2

DD0001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS

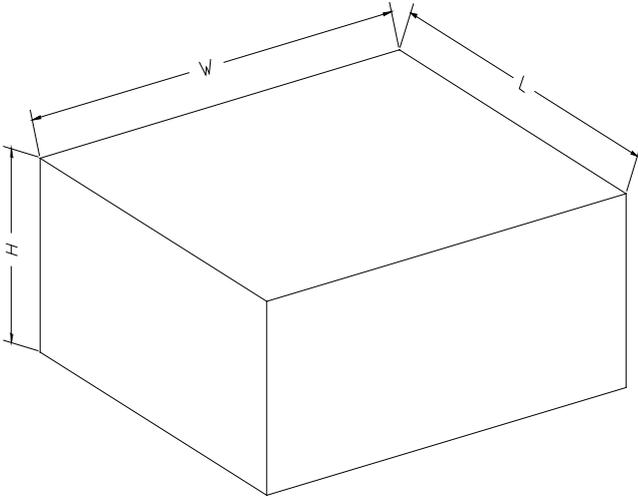

NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002