




Metallized Polypropylene Capacitors

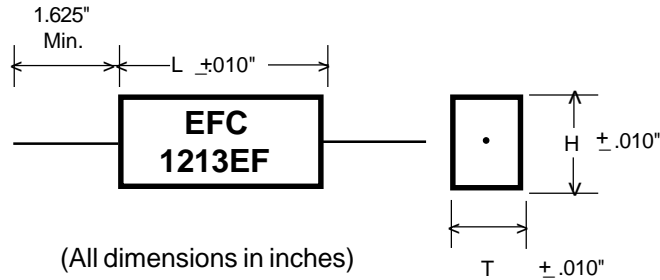

1213EF

**Epoxy Case
(Axial Leads)**

Lead Specs.

Tinned Copperweld
Under .190T = 24 AWG
.190 - .380T = 22 AWG
Above .380T = 20 AWG

DIMENSIONS and RATINGS

Cap.	1213EF-1 50 VDC			1213EF-2 100 -150 VDC			1213EF-3 200 VDC			1213EF-3 400 VDC			1213EF-3 600 VDC					
μF	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L			
.001	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0012	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0015	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0022	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0027	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0039	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0047	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0056	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0068	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.0082	.160	.240	.420	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570			
.01	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.420	.170	.290	.570			
.012	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.420	.230	.360	.550			
.015	.160	.240	.420	.160	.240	.420	.160	.240	.420	.170	.290	.570	.230	.360	.550			
.018	.160	.240	.420	.160	.240	.420	.170	.290	.420	.170	.290	.570	.230	.360	.550			
.022	.160	.240	.420	.160	.240	.420	.170	.290	.570	.170	.290	.570	.290	.420	.570			
.027	.160	.240	.420	.170	.290	.420	.170	.290	.570	.170	.290	.570	.290	.420	.570			
.033	.170	.290	.420	.170	.290	.550	.170	.290	.570	.230	.360	.550	.290	.420	.670			
.039	.170	.290	.420	.170	.290	.550	.170	.290	.570	.230	.360	.550	.290	.420	.670			
.047	.170	.290	.550	.170	.290	.550	.230	.360	.550	.230	.360	.550	.290	.420	.670			
.056	.170	.290	.550	.170	.290	.550	.230	.360	.550	.290	.420	.570	.290	.420	.820			
.068	.170	.290	.550	.170	.290	.550	.230	.360	.550	.290	.420	.570	.290	.420	.820			
.082	.170	.290	.550	.230	.360	.550	.290	.420	.570	.290	.420	.670	.390	.540	.820			
.1	.230	.360	.550	.230	.360	.550	.290	.420	.570	.290	.420	.670	.390	.540	.820			
.12	.230	.360	.550	.230	.360	.550	.290	.420	.570	.290	.420	.670	.390	.540	.820			
.15	.230	.360	.550	.290	.420	.570	.290	.420	.670	.290	.420	.820	.390	.540	1.040			
.18	.290	.420	.570	.290	.420	.570	.290	.420	.670	.390	.540	.820	.390	.540	1.240			
.22	.290	.420	.570	.290	.420	.670	.290	.420	.820	.390	.540	.820	.390	.540	1.240			
.27	.290	.420	.570	.290	.420	.670	.390	.540	.820	.390	.540	.820	.560	.720	1.240			
.33	.290	.420	.670	.290	.420	.820	.390	.540	.820	.390	.540	1.040	.560	.720	1.240			
.39	.290	.420	.670	.390	.540	.820	.390	.540	.820	.390	.540	1.240	.560	.720	1.240			
.47	.290	.420	.820	.390	.540	.820	.390	.540	.820	.390	.540	1.240	.560	.720	1.500			
.56	.390	.540	.820	.390	.540	.820	.390	.540	1.040	.560	.720	1.240	.560	.720	1.500			
.68	.390	.540	.820	.390	.540	.820	.390	.540	1.040	.560	.720	1.240						
.82	.390	.540	.820	.390	.540	1.040	.390	.540	1.240	.560	.720	1.240						
1.0	.390	.540	.820	.390	.540	1.240	.560	.720	1.240	.560	.720	1.240						
1.25	.390	.540	1.040	.390	.540	1.240	.560	.720	1.240									
1.5	.390	.540	1.240	.560	.720	1.240	.560	.720	1.240									
2.0	.560	.720	1.240	.560	.720	1.240												
3.0	.560	.720	1.240	.560	.720	1.500												

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629

FAX (203) 755-0659

www.DataSheet4U.com

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.