

FEATURES AND SPECIFICATIONS

Features and Benefits

- Positive housing locks to mate with Mini-Fit, Jr. receptacles
- Fully isolated terminals to protect contacts from damage
- Mini-Fit, BMI connectors have the capability of being selectively loaded with longer pins for grounding

Reference Information

Product Specification: PS-5556-0002

Packaging: Tray and bag

UL File No.: E29179

CSA File No.: LR19980

TUV License No.: R75142

Mates With: [42385](#), [42474](#) and [5557](#) dual row receptacles

Use With: Standard Mini-Fit terminals

Designed In: Millimeters

Electrical

Voltage: 600V

Current: (Used with 16 AWG)

Circuits	2-3	4-6	7-10	12-24
Amperes-BMI	9	8	7	6

Contact Resistance: 10mΩ max.

Dielectric Withstanding Voltage: 1500V

Insulation Resistance: 1000 MΩ min.

Mechanical

Insertion Force to PCB: 5.0kg max.

Mating Force: 0.7kg (1.54 lb) max.

Unmating Force: 0.35kg (0.7 lb) min.

Normal Force: 200g min.

Durability: 30 cycles

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0

Contact: Brass or Phosphor Bronze

Plating: Tin, select Gold or overall Gold


Operating Temperature: -40 to +105°C




4.20mm (.165") Pitch Mini-Fit, BMI™ Header

42440

Vertical Dual Row



CATALOG DRAWING (FOR REFERENCE ONLY)

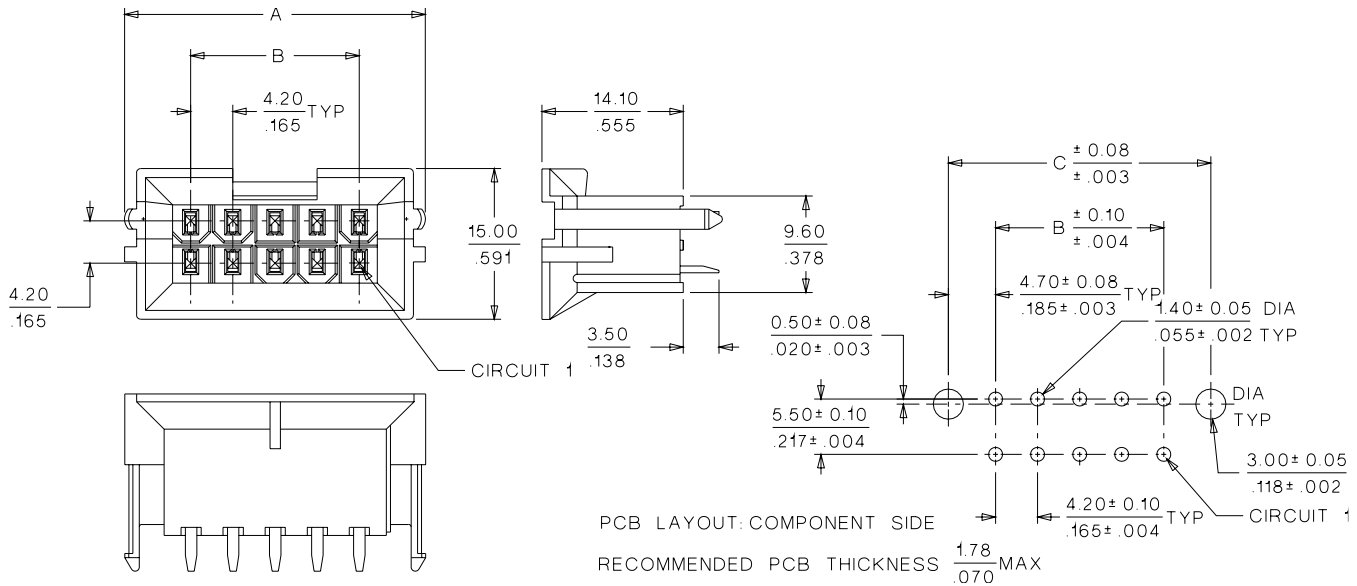

ORDERING INFORMATION AND DIMENSIONS

With Drain Holes							
Circuits	Order No.				Dimension		
	Tin Plated		Gold Plated				
	94V-2	94V-0	94V-2	94V-0	A	B	C
4	•15-24-6046	•15-24-6047	•15-28-6046	•15-28-6047	17.40 (.685)	4.20 (.170)	13.60 (.535)
6	•15-24-6066		•15-28-6066		21.60 (.850)	8.40 (.330)	17.80 (.701)
10	•15-24-6106	•15-24-6107	•15-28-6106	•15-28-6107	30.00 (1.181)	16.80 (.660)	26.20 (1.031)
14	•15-24-6146	•15-24-6147	•15-28-6146	•15-28-6147	38.40 (1.512)	25.20 (.990)	34.60 (1.362)
18	•15-24-6186	•15-24-6187	•15-28-6186	•15-28-6187	46.80 (1.843)	33.60 (1.320)	43.00 (1.693)
24	•15-24-6246	•15-24-6247	•15-28-6246	•15-28-6247	59.40 (2.339)	46.20 (1.820)	55.60 (2.189)

• US Standard Product, available through Molex franchised distributors

Without Drain Holes								
Circuits	Order No.				Dimension			
	Tin Plated		Gold Plated		A	B	C	
	94V-2	94V-0	94V-2	94V-0				
4	•15-24-6041	•15-24-6042	•15-28-6041	•15-28-6042	17.40 (.685)	4.20 (.170)	13.60 (.535)	
6					21.60 (.850)	8.40 (.330)	17.80 (.701)	
10	•15-24-6101	•15-24-6102	•15-28-6101	•15-28-6102	30.00 (1.181)	16.80 (.660)	26.20 (1.031)	
14	•15-24-6141	•15-24-6142	•15-28-6141	•15-28-6142	38.40 (1.512)	25.20 (.990)	34.60 (1.362)	
16	•15-24-6161		•15-28-6161		42.60 (1.677)	29.40 (1.160)	38.80 (1.528)	
18	•15-24-6181	•15-24-6182	•15-28-6181	•15-28-6182	46.80 (1.843)	33.60 (1.320)	43.00 (1.693)	
24	•15-24-6241	•15-24-6242	•15-28-6241	•15-28-6242	59.40 (2.339)	46.20 (1.820)	55.60 (2.189)	