

isc N-Channel MOSFET Transistor

15N06

• FEATURES


- Drain Current $I_D = 15A @ T_C = 25^\circ C$
- Drain Source Voltage-
: $V_{DS} = 60V(\text{Min})$
- Static Drain-Source On-Resistance
: $R_{DS(on)} = 0.14 \Omega (\text{Max})$
- Fast Switching
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS

- Switch regulators
- Switching converters motor drivers and relay drivers

• ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DS}	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage-Continuous	± 15	V
I_D	Drain Current-Continuous	15	A
I_{DM}	Drain Current-Single Pulsed	40	A
P_D	Total Dissipation @ $T_C = 25^\circ C$	75	W
T_j	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature	-55~150	$^\circ C$

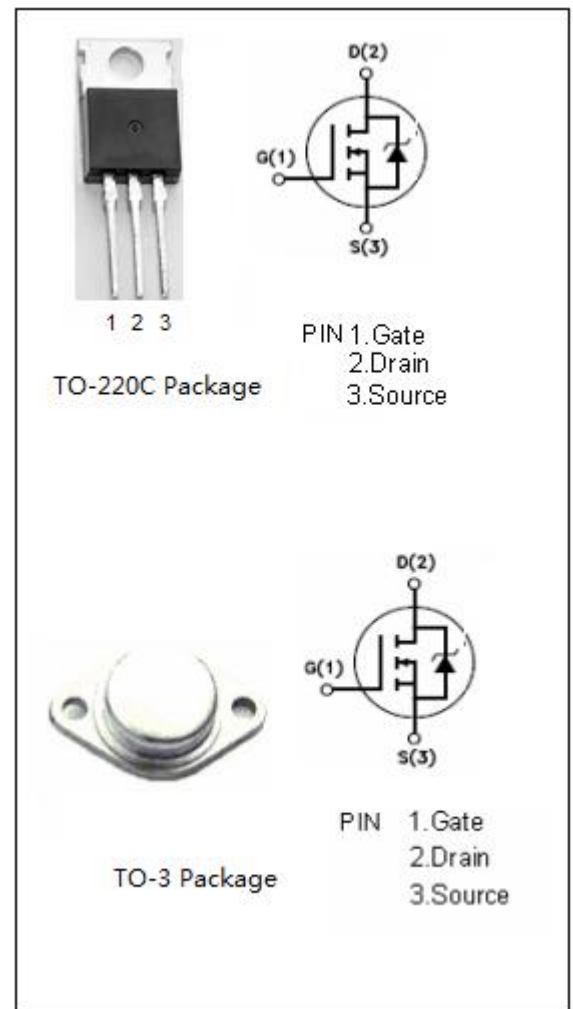

isc N-Channel MOSFET Transistor

15N06

• ELECTRICAL CHARACTERISTICS



 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0; I_D=1\text{mA}$	60			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=250\mu\text{A}$	2.0		4.0	V
V_{SD}	Diode Forward On-voltage	$I_S=14\text{A}; V_{GS}=0$			0.14	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=5\text{V}; I_D=7.5\text{A}$			0.1	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 15\text{V}; V_{DS}=0$			± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=60\text{V}; V_{GS}=0$			1	μA
C_{iss}	Input Capacitance	$V_{DS}=25\text{V};$ $V_{GS}=0\text{V};$ $f_T=1\text{MHz}$			900	pF
C_{rss}	Reverse Transfer capacitance				200	
C_{oss}	Output Capacitance				450	
t_r	Rise Time	$V_{GS}=5\text{V};$ $R_{GS}=50\Omega$ $I_D=7.5\text{A};$ $V_{DD}=25\text{V};$			260	ns
$t_{d(on)}$	Turn-on Delay Time				40	
t_f	Fall Time				200	
$t_{d(off)}$	Turn-off Delay Time				200	

isc N-Channel MOSFET Transistor

15N06

Outline Drawing

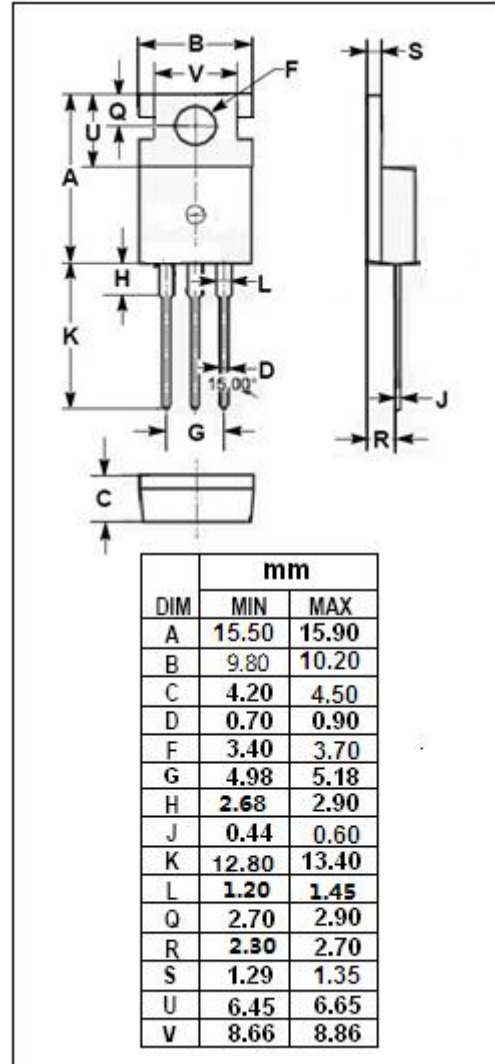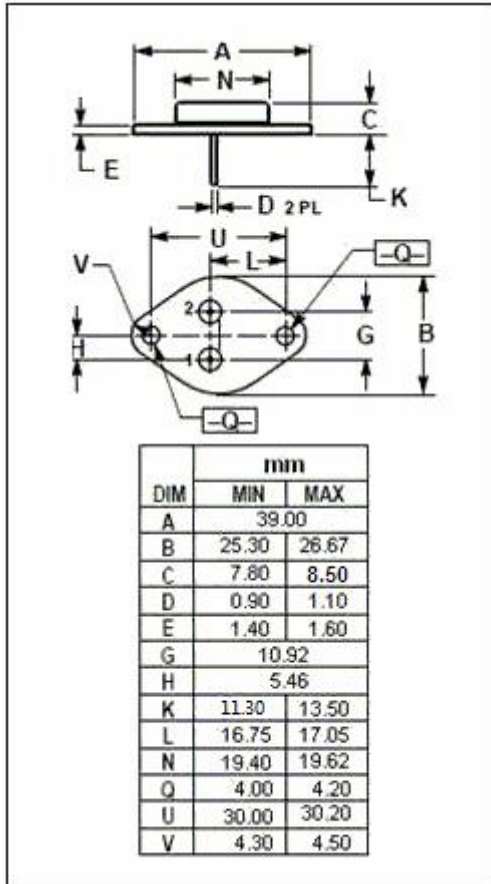

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.