



TUBES www.DataSheet4U.com

17H3

DIODE

17H3
ET-T1301
Page 1
4-56

FOR TV DAMPING DIODE APPLICATIONS

DESCRIPTION AND RATING

The 17H3 is a miniature heater-cathode type diode intended for service as the damping diode in the horizontal-deflection circuit of compact, 300-milliampere series-string television receivers. The tube features relatively small size and low power requirements. It also has a controlled heater warm-up characteristic as required for use in television receivers that employ series-connected heaters.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Voltage, AC or DC..... 17.5 Volts

Heater Current..... $0.3 \pm 6\%$ Amperes

Heater Warm-up Time*..... 11 Seconds

Direct Interelectrode Capacitances, approximate†

Cathode to Plate and Heater..... 5.5 μf

Plate to Cathode and Heater..... 4.0 μf

Heater to Cathode..... 2.0 μf

MECHANICAL

Mounting Position—Any

Envelope—T-6½, Glass

Base—E9-1, Small Button 9-Pin

TV DAMPER SERVICE‡—DESIGN-MAXIMUM VALUES

Peak Inverse Plate Voltage..... 2000 Volts

Plate Dissipation..... 3.0 Watts

Steady-State Peak Plate Current..... 450 Milliamperes

DC Output Current..... 75 Milliamperes

Heater-Cathode Voltage

Heater Positive with Respect to Cathode

DC Component..... 100 Volts

Total DC and Peak..... 200 Volts


Heater Negative with Respect to Cathode

DC Component..... 500 Volts

Total DC and Peak..... 2000 Volts

Design-Maximum Ratings are the limiting values expressed with respect to bogie tubes at which satisfactory tube life can be expected to occur for the types of service for which the tube is rated. Therefore, the equipment designer must establish the circuit design so that initially and throughout equipment life no design-maximum value is exceeded with a bogie tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, and environmental conditions.

BASING DIAGRAM



RETMA 9FK

TERMINAL CONNECTIONS

Pin 1—Cathode

Pin 2—No Connection—Do Not Use

Pin 3—Plate

Pin 4—Heater

Pin 5—Heater


Pin 6—No Connection—Do Not Use

Pin 7—No Connection—Do Not Use

Pin 8—Plate

Pin 9—No Connection—Do Not Use

PHYSICAL DIMENSIONS



RETMA 6-3

GENERAL ELECTRIC

www.DataSheet4U.com

AVERAGE CHARACTERISTICS

Tube Voltage Drop www.DataSheet4U.com

$I_b = 140$ Milliamperes DC. 22 Volts


* The time required for the voltage across the heater to reach 80 percent of its rated value after applying 4 times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the rated heater voltage divided by the rated heater current.

† Without external shield.

‡ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.

Note: Operation of this tube as a power rectifier is not recommended.

AVERAGE PLATE CHARACTERISTICS

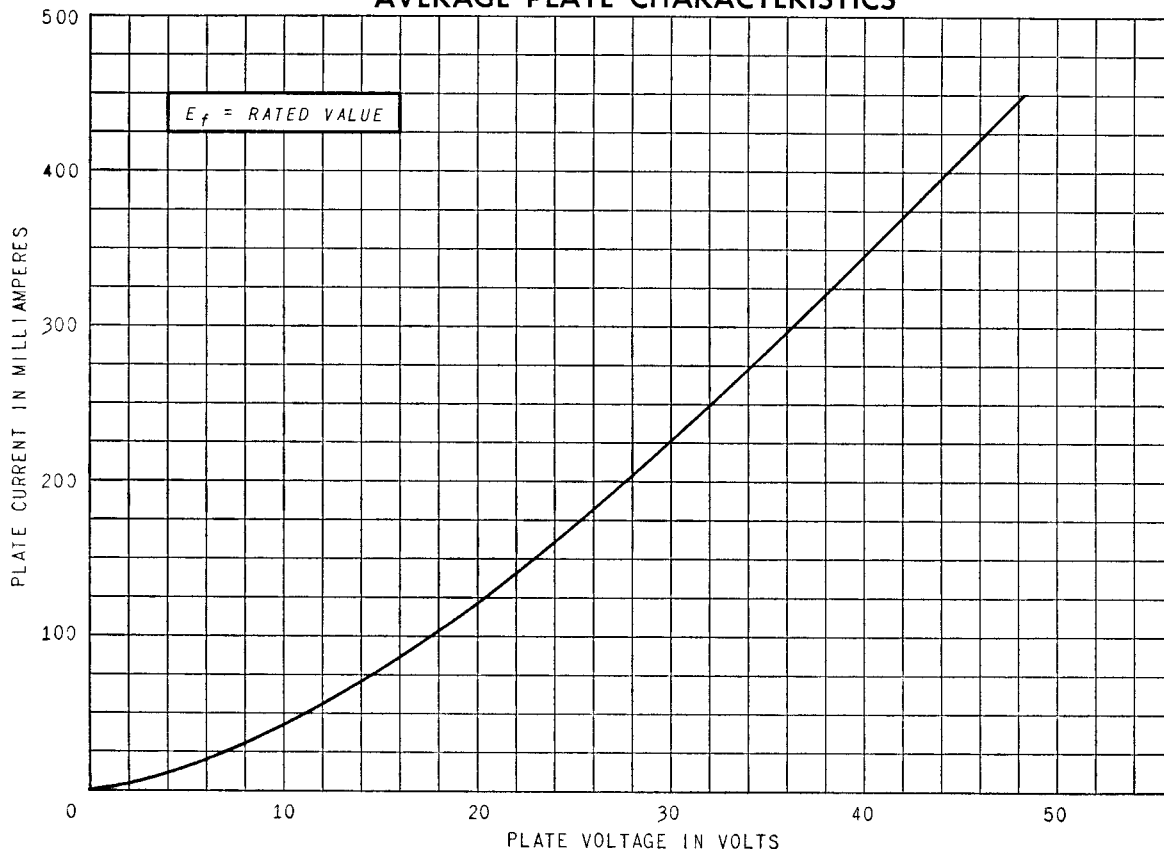

TUBE DEPARTMENT

GENERAL  ELECTRIC

Schenectady 5, N. Y.