

WRA_CS-3W & WRB_CS-3W Series 3W, WIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER



RoHS

FEATURES

- 2:1 wide input voltage range
- I/O Isolation 1500VDC
- Short circuit protection (automatic recovery)
- External On/Off control
- Internal SMD construction
- Operating temperature: -40°C to +85°C
- RoHS Compliance


APPLICATIONS

The WRA_CS-3W & WRB-CS-3W series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage ranges 2:1);
- 2) Where isolation is necessary between input and output (Isolation Voltage $\leq$ 1500VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

MODEL SELECTION

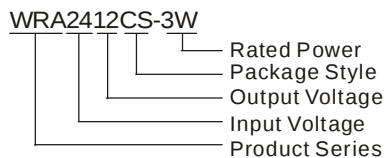

PRODUCT PROGRAM

Part Number	Input			Output			Efficiency (%, Typ.)
	Voltage (VDC)			Voltage (VDC)	Current (mA)		
	Nominal	Range	Max.*		Max.	Min.	
WRA1205CS-3W	12	9.0-18	22	±5	±300	±30	74
WRA1212CS-3W				±12	±125	±13	78
WRA1215CS-3W				±15	±100	±10	80
WRB1205CS-3W				5	600	60	74
WRB1209CS-3W				9	333	33	76
WRB1212CS-3W				12	250	25	78
WRB1215CS-3W				15	200	20	80
WRA2405CS-3W	24	18-36	40	±5	±300	±30	76
WRA2412CS-3W				±12	±125	±13	80
WRA2415CS-3W				±15	±100	±10	81
WRB2405CS-3W				5	600	60	76
WRB2409CS-3W				9	333	33	78
WRB2412CS-3W				12	250	25	80
WRB2415CS-3W				15	200	20	81

*Input voltage can't exceed this value, or will cause the permanent damage.

COMMON SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. Rise at full load			15		
Lead Temperature	1.5mm from case for 10 seconds			300	
No-load power consumption			100		mW
Cooling		Free air convection			
Case material		Plastic (UL94-V0)			
Short circuit protection		Continuous, automatic recovery			
MTBF		1000			K hours
Weight			6		g

MORNSUN Science & Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
[Http://www.mornsun-power.com](http://www.mornsun-power.com)


ISOLATION SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Tested for 1 minute and 1mA max	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation capacitance	100KHz, 1V		80		pF

OUTPUT SPECIFICATIONS					
Item	Test conditions	Min.	Typ.	Max.	Units
Output power	See above products program	0.3		3	W
Positive voltage accuracy	Refer to recommended circuit		±1	±3	%
Negative voltage accuracy	Refer to recommended circuit		±3	±5	
Load regulation	10% to 100% load (WRB_CS-3W) 10% to 100% load (WRA_CS-3W)*		±0.5 ±0.5	±0.75 ±1.0	
Line regulation	Input voltage from low to high		±0.2	±0.5	
Temperature drift (Vout)	Refer to recommended circuit			±0.03	%/°C
Ripple & Noise**	20MHz Bandwidth		50	100	mVp-p
Switching Frequency	100% load, input voltage range		300		KHz

*Dual output models unbalanced load (25/100%): ±5%Max.
 **Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

TYPICAL TEMPERATURE CURVE

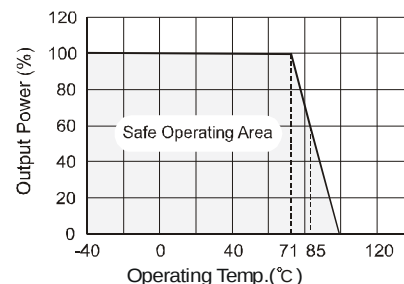

APPLICATION NOTE

1) CTRL Terminal

When open or high impedance, the converter work well; When this pin is 'high'; the converter shutdown; It should be note that the input current (Ic) should between 5-10mA, exceeding the maximum 20mA will cause permanence damage to the converter. The value of R can be derived as follows:

$$R = \frac{V_C - V_D - 1.0}{I_C}$$

2) Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

General: Cin: 12V 100μF
 24V 10μF-47μF
 Cout: 100uF(Typ.)
 Lin: 4.7μH -120μH
 Lout: 2.2μH-10μH
 Cs: 10μF-47μF


3) Input current

While using unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current Ip (Figure 2). General: Ip ≤1.4*Iin-max


4) No parallel connection or plug and play

RECOMMENDED CIRCUIT


Single Output

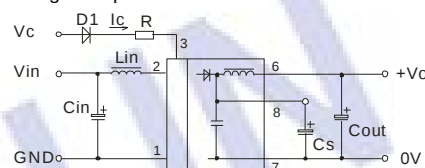

Dual Output

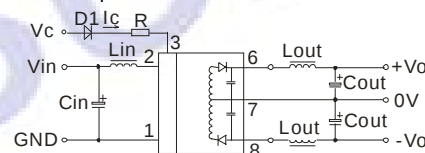

(Figure 1)

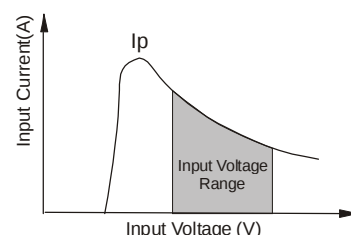


(Figure 2)

External Capacitor Table (Table 1)

Single Vout (VDC)	Cout (μF) (Max)	Dual Vout (VDC)	Cout (μF) (Max)
5	1000	±5	680
9	680	±9	470
12	470	±12	330
15	330	±15	220

OUTLINE DIMENSIONS FOOTPRINT DETAILS

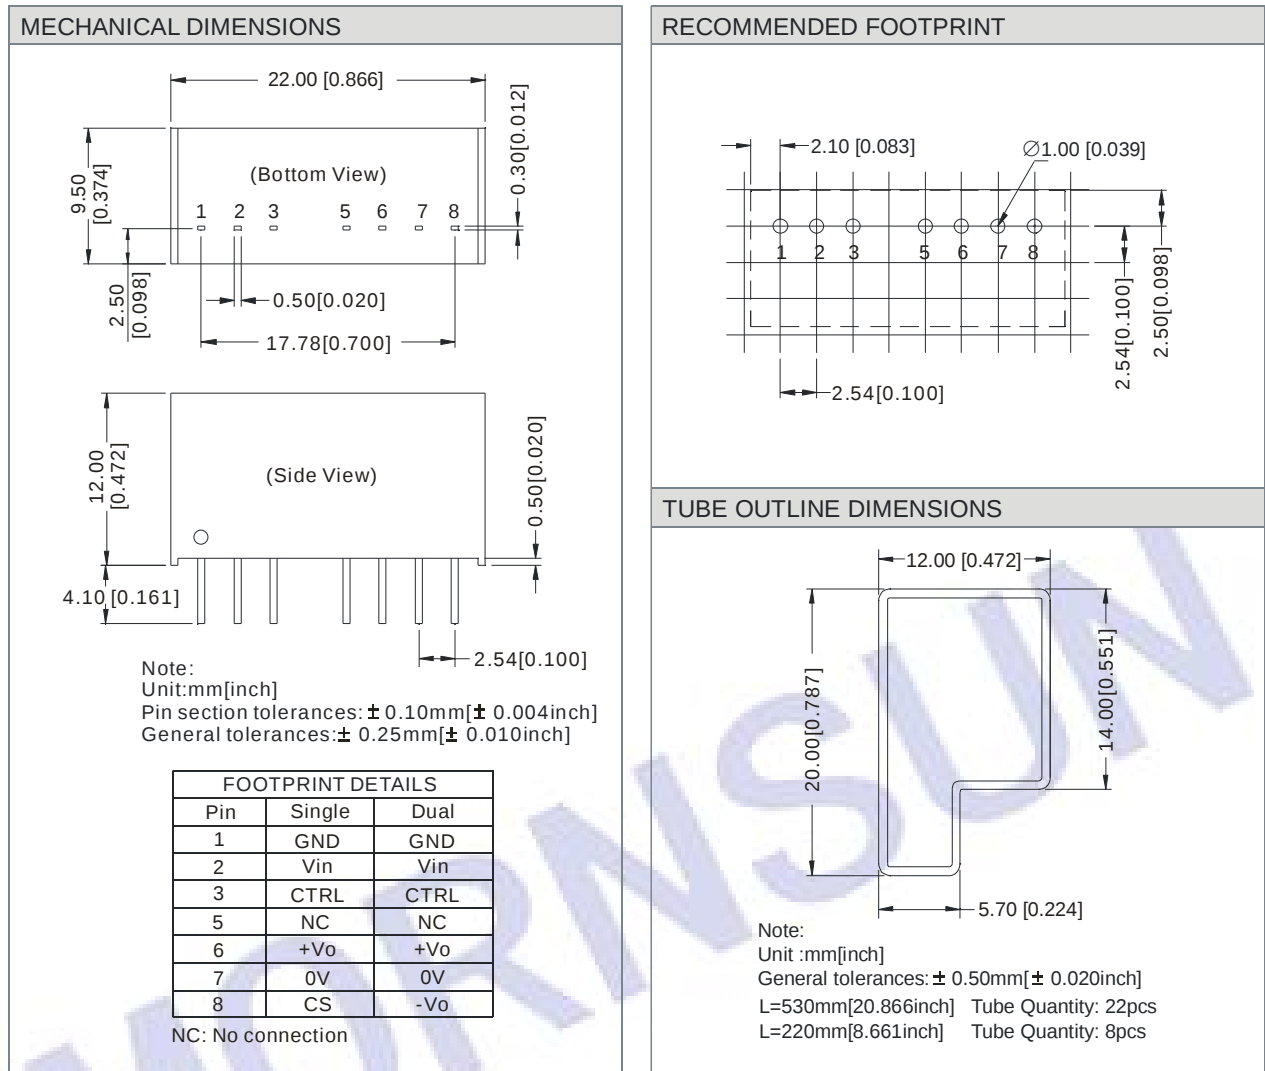

Note:

1. The load shouldn't be less than 10%, otherwise ripple will increase dramatically.
2. Operation under 10% load will not damage the converter; However, they may not meet all specification listed.
3. All specifications measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
4. In this datasheet, all the test methods of indications are based on corporate standards.
5. Only typical models listed, other models may be different, please contact our technical person for more details.