# TOSHIBA

TOSHIBA Transistor Silicon NPN Triple Diffused Type (PCT process)

# 2SC5172

Switching Regulator and High-Voltage Switching Applications

High-Speed DC-DC Converter Applications


• Excellent switching times:  $t_r = 0.5 \ \mu s \ (max)$ ,

 $t_f = 0.3 \ \mu s \ (max) \ at \ I_C = 2 \ A$ 

• High collector breakdown voltage:  $V_{CEO} = 400 \text{ V}$ 

#### Maximum Ratings (Tc = 25°C)

Characteristics Sy		mbol	Rating	Unit	
Collector-base voltage		V <sub>CBO</sub>	600	V	
Collector-emitter voltage		V <sub>CEO</sub>	400	V	
Emitter-base voltage		V <sub>EBO</sub>	7	V	
Collector current	DC I	С	5	А	
	Pulse I	<sub>CP</sub> 7		~	
Base current		Ι <sub>Β</sub>	2 A		
Collector power dissipation	Ta = 25°C	D-	2.0	W	
	Tc = 25°C	P <sub>C</sub>	25		
Junction temperature		Tj	150	°C	
Storage temperature range		T <sub>stg</sub>	-55 to 150	°C	

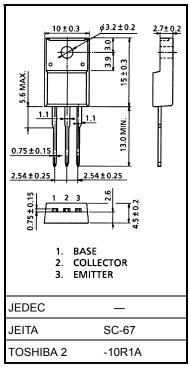

Weight: 1.7 g (typ.)

#### **Electrical Characteristics (Tc = 25°C)**

Characteristics Sy		mbol	Test Condition	Min	Тур.	Max	Unit
Collector cut-off current		I <sub>CBO</sub>	V <sub>CB</sub> = 500 V, I <sub>E</sub> = 0		<u> </u>		μA
Emitter cut-off current		I <sub>EBO</sub>	V <sub>EB</sub> = 7 V, I <sub>C</sub> = 0		— 100		nA
Collector-base breakdown voltage		V (BR) CBO	I <sub>C</sub> = 1 mA, I <sub>E</sub> = 0	600	—	— V	
Collector-emitter breakdown voltage		V (BR) CEO	I <sub>C</sub> = 10 mA, I <sub>B</sub> = 0	400	_	-V	
DC current gain		hFE (1)	V <sub>CE</sub> = 5 V, I <sub>C</sub> = 1 mA	13	_	-	
		h <sub>FE (2)</sub>	V <sub>CE</sub> = 5 V, I <sub>C</sub> = 0.5 A	20	— 65		
Collector-emitter saturation voltage		V <sub>CE (sat)</sub>	I <sub>C</sub> = 2 A, I <sub>B</sub> = 0.25 A	—	<u> </u>	0	V
Base-emitter saturation voltage		V <sub>BE (sat)</sub>	I <sub>C</sub> = 2 A, I <sub>B</sub> = 0.25 A		— 1.	3	V
Switching time	Rise time	t <sub>r</sub>	20 µs Input B1 C m m m m m m m m m m m m m m m m m m m	_	— <b>0</b> .	5	
	Storage time	t <sub>stg</sub>		_	<b>—</b> 2.	0	μs
	Fall time	t <sub>f</sub>	I <sub>B1</sub> = 0.25 A, I <sub>B2</sub> = -0.5 A, duty cycle < 1%	_	— 0.	3	


2004-07-26

1


Unit: mm


## **TOSHIBA**


### Marking

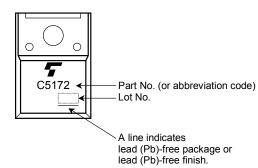

### **TOSHIBA**

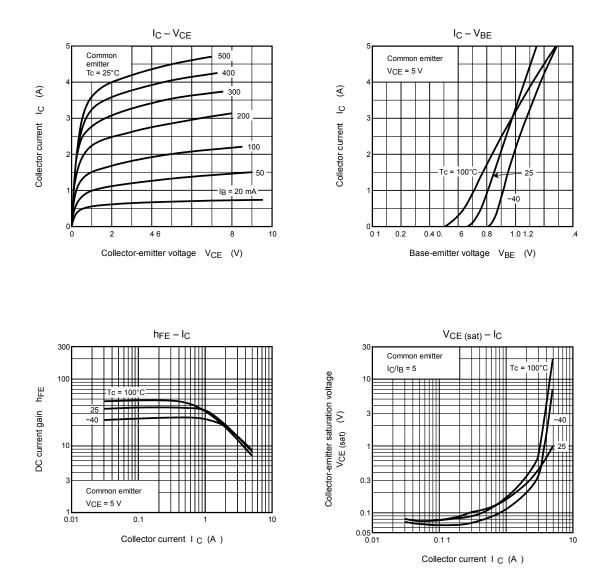

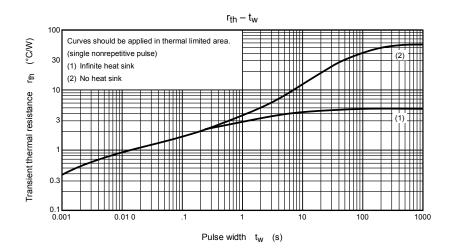

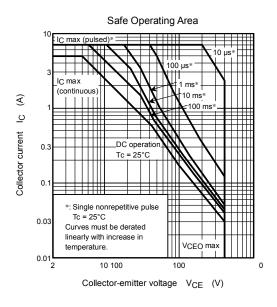

#### **RESTRICTIONS ON PRODUCT USE**

030619EAA

- The information contained herein is subject to change without notice.
- The information contained herein is p resented only as a guide f or t he ap plications of our pr oducts. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No I icense is granted by i mplication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as
- set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TO SHIBA pr oducts I isted in this doc ument ar e intended f or u sage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). T hese T OSHIBA p roducts a re neither i ntended nor wa rranted f or us age in equipment that r equires extraordinarily high q uality and/or reliability or a malf unction or failure of which may cause loss of hu man life or bodily i njury ("Unintended Us age"). U nintended U sage i nclude atomic e nergy c ontrol i nstruments, airplane or spaceship i nstruments, transportation instruments, traffic signal i nstruments, c ombustion control instruments, medical instruments, all t ypes of s afety devices, et c.. Unintended Usage of TO SHIBA pr oducts I isted i n this document shall be made at the customer's own risk.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.