


1N4532

FEATURES

- 1N4532 AVAILABLE IN JAN, JANTX, AND JANTXV PER MIL-PRF-19500/144
- SWITCHING DIODE
- METALLURGICALLY BONDED
- HERMETICALLY SEALED
- DOUBLE PLUG CONSTRUCTION

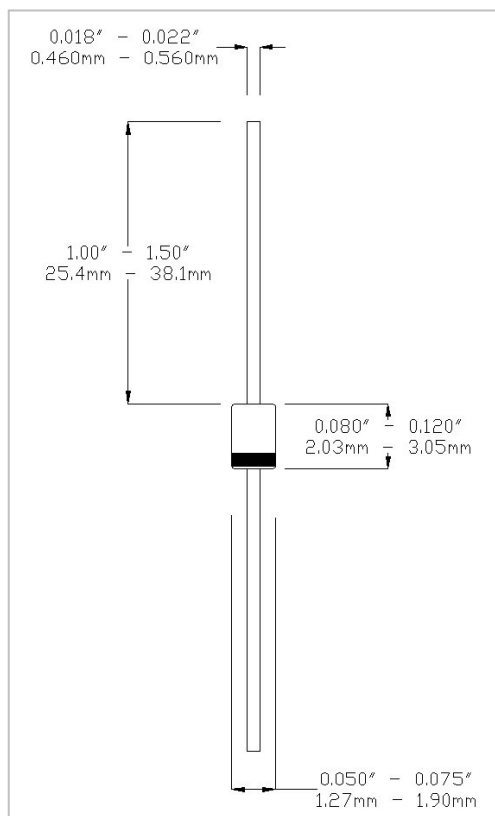

MAXIMUM RATINGS AT 25 °C

Operating Temperature:	-55°C to +175°C
Storage Temperature:	-55°C to +175°C
Surge Current, Sine, 1uS:	2.0A
Total Power Dissipation:	500mW
Operating Current:	125mA, $T_A = +25^\circ\text{C}$
Derating Factor:	0.883mA/°C above $T_A = +25^\circ\text{C}$
D.C. Reverse Voltage (VRWM):	50V

DC ELECTRICAL CHARACTERISTICS

V_F				I_R				V_{BR}			
Ambient (°C)	I_F mA	Min V	Max V	Ambient (°C)	V (dc)	Min μA	Max μA	Ambient (°C)	I_R μA	Min V	Max V
25	10	-	1.0	25	50	-	0.1	25	5	75	-
150	10	-	0.7	150	50	-	100	-55	10	75	-

DESIGN DATA

Case: Hermetically sealed glass package per MIL-PRF-19500/144 DO-34 outline

Lead Material: Copper clad steel

Lead Finish: Tin/Lead

Thermal Resistance ($R_{\theta JL}$): 250°C/W maximum at $L = .375"$

Thermal Impedance ($Z_{\theta JX}$): 70°C/W maximum

Marking: Alpha numeric.

Polarity: Cathode end is banded.

AC ELECTRICAL CHARACTERISTICS AT 25°C

	Symbol	Min	Max
Capacitance @ 0V	pF	-	2.0
T_{RR} @ $I_F = I_R = 10\text{mA}$, $I_{Rec} = 1\text{mA}$.	nsec	-	4.0
T_{FR} @ $I_F = 100\text{mA}$	nsec	-	30
V_{FR} @ $I_F = 100\text{mA}$	V(pk)	-	5



WWW.MICROSEMI.COM

IRELAND - GORT ROAD, ENNIS, CO. CLARE

PHONE: +353 65 6840044

TOLL FREE: +186 62 702434

FAX: +353 65 6822298

U.S.A. DOMESTIC SALES CONTACT

PHONE: (617) 926 0404

TOLL FREE: 1 800 666 2999