



6AT6

6AT6

TWIN DIODE-HIGH-MU TRIODE

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 0.3 amp

Direct Interelectrode Capacitances:

	Without External Shield	With External Shield ⁰	
Grid to triode plate.	2.0	2.0	μf
Grid to cathode and heater. . .	2.2	2.2	μf
Plate to cathode and heater . .	0.8	1.2	μf
Plate of diode unit No.2 to triode grid.	0.04 max.		μf


Characteristics, Class A₁ Amplifier (Triode Unit):

Plate Voltage	100	250	volts
Grid Voltage.	-1	-3	volts
Amplification Factor.	70	70	
Plate Resistance (Approx.). . .	54000	58000	ohms
Transconductance.	1300	1200	μmhos
Plate Current	0.8	1	ma

Mechanical:

Mounting Position	Any
Maximum Overall Length.	2-1/8"
Maximum Seated Length.	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip)	1-1/2" $\pm$ 3/32"
Maximum Diameter.	3/4"
Dimensional Outline	See General Section
Bulb.	T-5-1/2
Base.	Small-Button Miniature 7-Pin (JETEC No. E7-1)
Basing Designation for BOTTOM VIEW.	7BT

Pin 1 - Triode Grid
Pin 2 - Cathode
Pin 3 - Heater
Pin 4 - Heater



Pin 5 - Diode
Plate No.2
Pin 6 - Diode
Plate No.1
Pin 7 - Triode Plate

TRIODE UNIT-AMPLIFIER - Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE.	300 max.	volts
GRID VOLTAGE:		
Positive bias value.	0 max.	volts
PLATE DISSIPATION.	0.5 max.	watt
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	90 max.	volts
Heater positive with respect to cathode.	90 max.	volts

⁰ With external shield JETEC No. 316 connected to cathode.

← Indicates a change.

SEPT. 1, 1955

TUBE DIVISION

DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6AT6



6AT6

TWIN DIODE—HIGH-MU TRIODE

→ Typical Operation as Resistance-Coupled Amplifier:

See *RESISTANCE-COUPLED AMPLIFIER CHART No. 7*
at front of this Section

→ DIODE UNITS

Maximum Ratings, Design-Center Values:

PLATE CURRENT (For each diode). 1.0 max. ma

Diode Considerations:

Consideration of these units, including typical circuits and diode curves, is given at the front of this Section. Diode biasing of the triode unit of the 6AT6 is not suitable.

→ Indicates a change.

SEPT. 1, 1955

TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


DATA



6AT6

6AT6

AVERAGE PLATE CHARACTERISTICS TRIODE UNIT

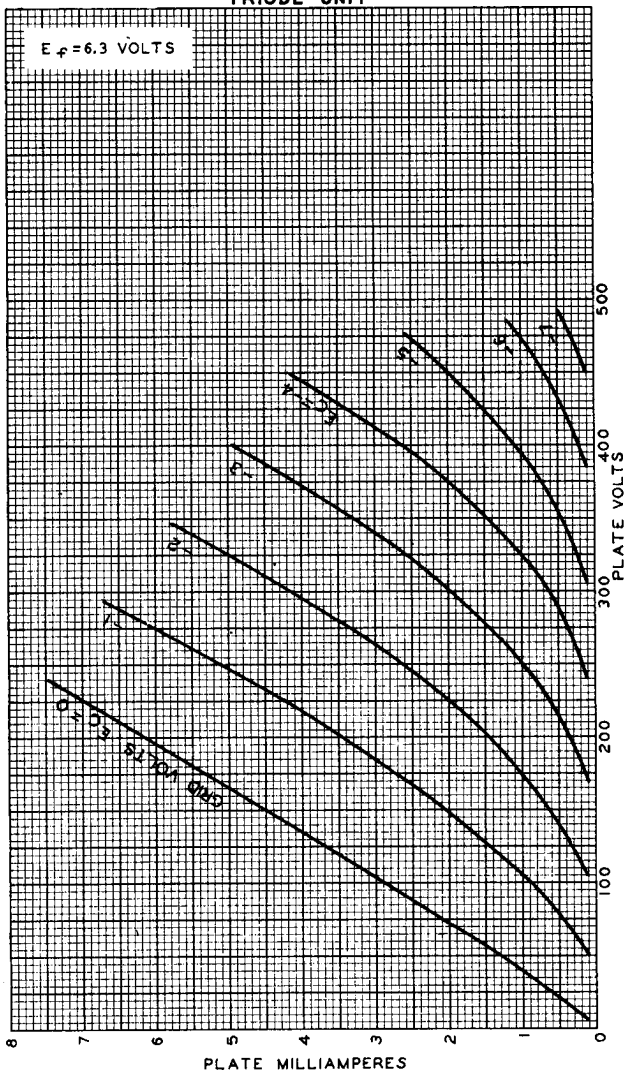

OCT. 19, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6610