

Adjustable Low Voltage Shunt Regulator
General Description

The AHK432 is a low voltage adjustable shunt reference with thermal stability guaranteed over the full industrial temperature range. This three-terminal regulator has an output voltage range that extends from V_{REF} (1.24V) to 20V, giving designers outstanding flexibility in the development of power supplies and instrumentation. With a low operating current of 60 μ A, the AHK432 is well suited for battery-powered portable electronic applications. It also has a sharp turn-on characteristic and a dynamic resistance of only 50m Ω , making it an excellent replacement for zener diodes in low tempco designs.


The AHK432 is available in the Pb-free, surface-mount 3- or 5-pin SOT23, as well as the through hole TO-92. Three voltage tolerance options are offered in each package: $\pm 0.5\%$, $\pm 1\%$, and $\pm 2\%$.

Features

- Wide Output Voltage Range (1.24V to 20V)
- Operating Current From 60 μ A to 100mA
- Low Dynamic Output Resistance of 50m Ω
- $\pm 0.5\%$ Trimmed Voltage Reference
- 10mV (Typical) V_{REF} Deviation, From -40°C to +105°C
- Surface Mount 3- or 5-Pin SOT23 or Through-Hole 3-Pin TO-92 Package

Applications

- Adjustable and Programmable Supplies
- Global Voltage Reference for Multiple Power Supplies
- Instrumentation
- Isolated Feedback in Switching Power Supplies
- Linear Regulators (External Reference)
- Medical Electronics (see Endnote, page 10)
- Notebook Computers

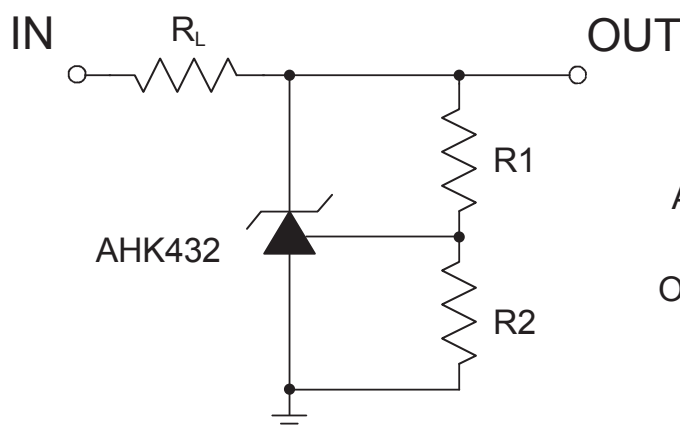Typical Application


Adjustable regulator:


$$OUT = V_{REF} \left(\frac{R_1 + R_2}{R_2} \right)$$

Pin Descriptions


Pin			Description
SOT23-3	SOT23-5	TO-92	
1	4	1	Reference.
2	3	3	Cathode.
3	5	2	Anode.
N/A	1, 2	N/A	Not internally connected.

Pin Configuration


**SOT23-3
(Top View)**

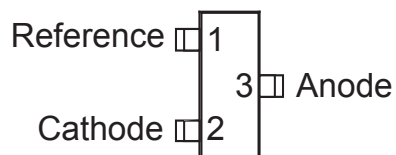

**SOT23-5
(Top View)**

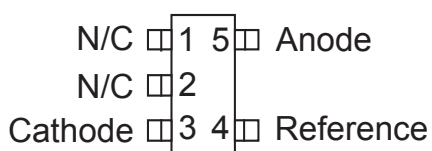

**TO-92
(Top View)**



Absolute Maximum Ratings¹

$T_A = 25^{\circ}\text{C}$, unless otherwise noted.

Symbol	Description	Value	Units
V_Z	Cathode Voltage	20	V
I_Z	Continuous Cathode Current	100	mA
I_{REF}	Reference Current	3	mA
T_J	Operating Junction Temperature Range	-40 to 150	$^{\circ}\text{C}$
T_{LEAD}	Maximum Soldering Temperature (at Leads)	260	$^{\circ}\text{C}$

Thermal Characteristics

Symbol	Description	Value	Units
Θ_{JA}	Maximum Thermal Resistance	TO-92	$^{\circ}\text{C}/\text{W}$
		SOT23-3, SOT23-5	
P_D	Maximum Power Dissipation	TO-92	mW
		SOT23-3, SOT23-5	

1. Stresses above those listed in Absolute Maximum Ratings may cause permanent damage to the device. Functional operation at conditions other than the operating conditions specified is not implied. Only one Absolute Maximum Rating should be applied at any one time.

Electrical Characteristics


$T_A = 25^\circ\text{C}$, unless otherwise noted.

Symbol	Description	Conditions		AHK432 0.5%			AHK432 1.0%			AHK432 2.0%			Units
				Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
V _{REF}	Reference Voltage	V _Z = V _{REF} , I _Z = 10mA (test circuit 1)	T _A = 25°C T _A = -40 to +105°C	1.234	1.240	1.246	1.228	1.240	1.252	1.215	1.240	1.265	
V _{DEV}	V _{REF} Temperature Deviation	T _A = -40°C to +105°C, V _Z = V _{REF} , I _Z = 10mA (test circuit 1)			10	25		10	25		10	25	mV
ΔV _{REF} /ΔV _Z	Ratio of Change in V _{REF} to Change in Cathode Voltage	I _Z = 10mA, ΔV _Z = 16V to V _{REF} (test circuit 2)			-1.0	-2.7		-1.0	-2.7		-1.0	-2.7	mV/V
I _{REF}	Reference Input Current	R1 = 10kΩ, R2 = ∞, I _Z = 10mA (test circuit 2)			0.15	0.5		0.15	0.5		0.15	0.5	μA
I _{REF(DEV)}	I _{REF} Temperature Deviation	T _A = -40°C to +105°C, R1 = 10kΩ, R2 = ∞, I _Z = 10mA (test circuit 2)			0.1	0.4		0.1	0.4		0.1	0.4	μA
I _{Z(OFF)}	Off State Cathode Current	V _{REF} = 0V (test circuit 3)	V _Z = 6V V _Z = 16V		0.04 0.04	0.1 0.5		0.04 0.04	0.1 0.5		0.04 0.04	0.1 0.5	μA
R _Z	Dynamic Output Impedance	f <1kHz, V _Z = V _{REF} , I _Z = 100μA to 100mA (test circuit 1)			0.05	0.2		0.05	0.2		0.05	0.2	Ω
I _{Z(MIN)}	Minimum Operating Current	V _Z = V _{REF} (test circuit 1)			60	80		60	80		60	80	μA


Typical Characteristics

Unless otherwise noted, $T_A = 25^\circ\text{C}$, $I_Z = 10\text{mA}$.


Cathode Current vs. Cathode Voltage

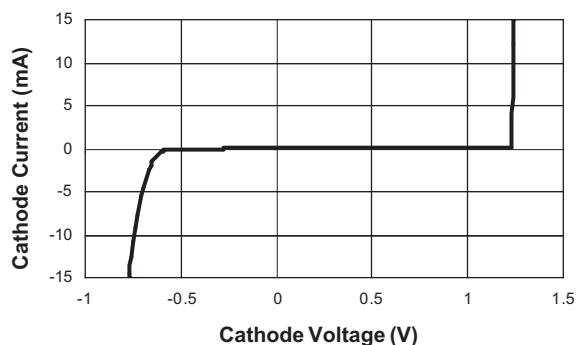


Cathode Current vs. Cathode Voltage

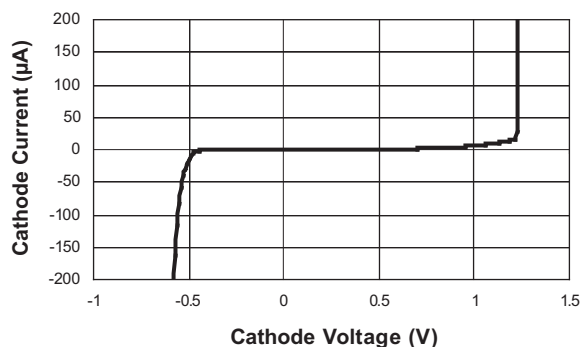


Reference Voltage vs. Temperature

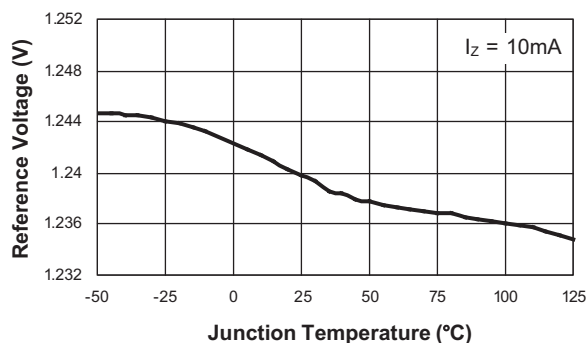


Reference Current vs. Temperature

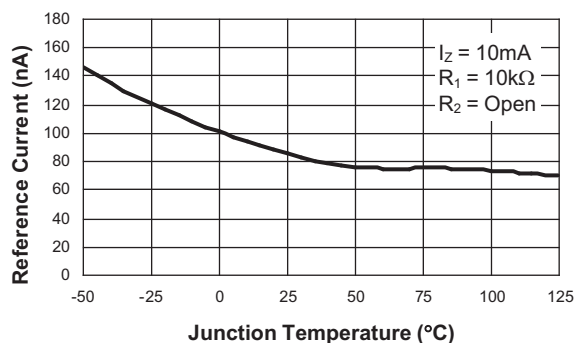

Cathode Current vs. Temperature

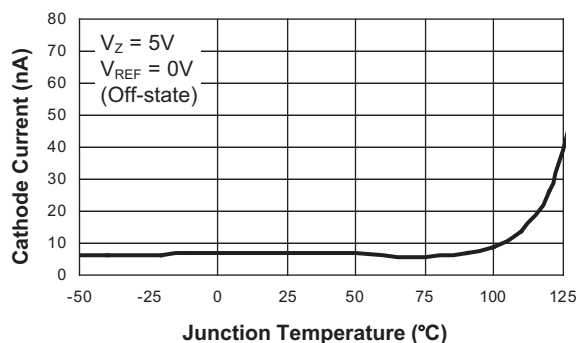


Ratio of $\Delta V_{REF} / \Delta V_Z$ vs. Temperature

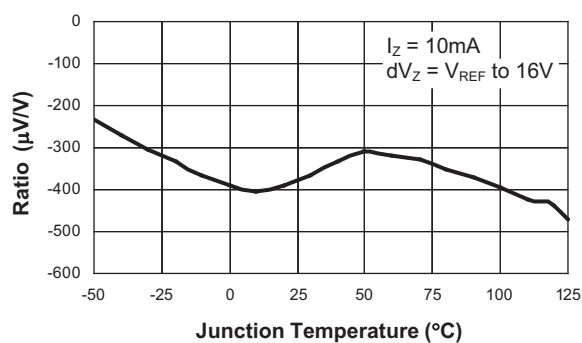


Typical Characteristics

Unless otherwise noted, $T_A = 25^\circ\text{C}$, $I_Z = 10\text{mA}$.



Cathode Impedance vs. Temperature

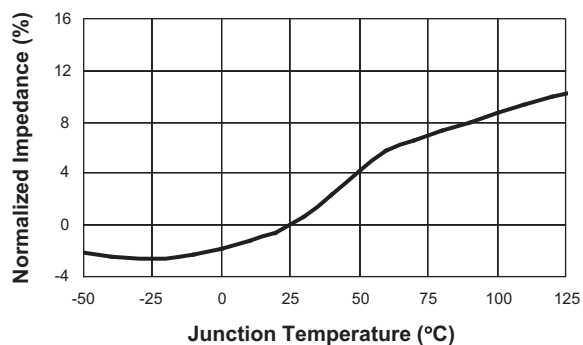

Impedance vs. Frequency


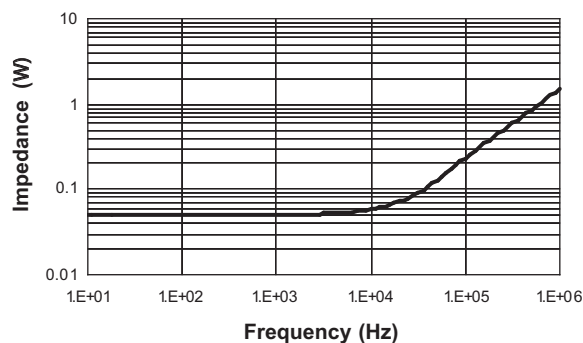


Gain and Phase vs. Frequency

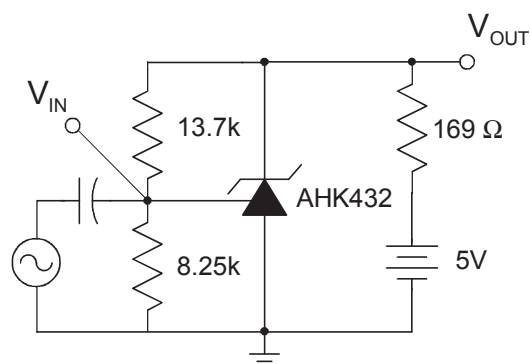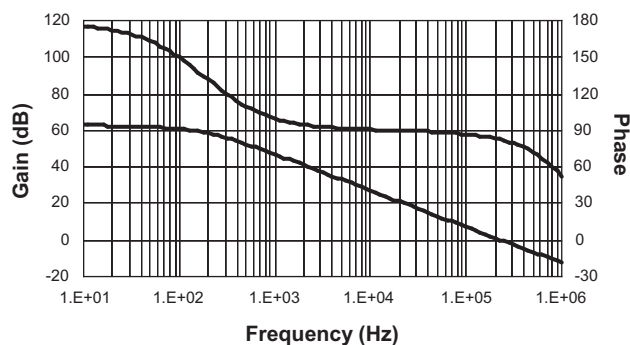


Test Circuit for Voltage Gain and Phase

Stability Boundary

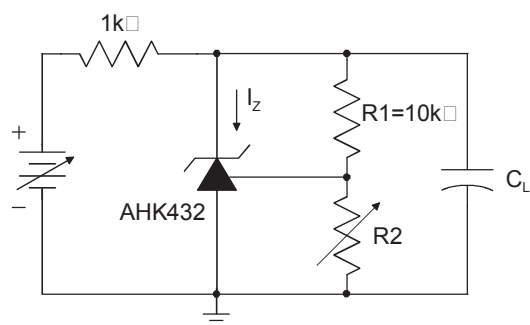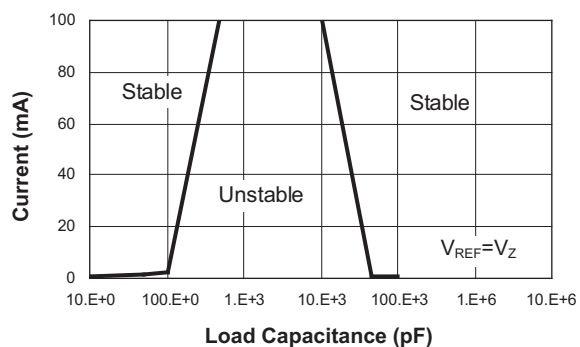


Test Circuit for Stability

Functional Block Diagram

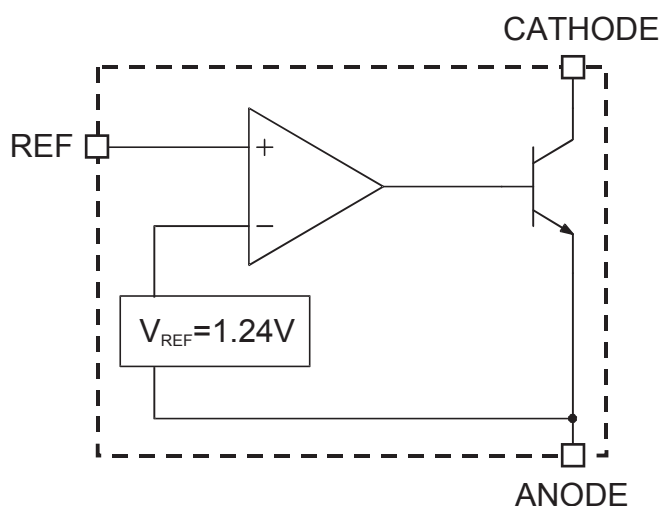


Symbol Diagram

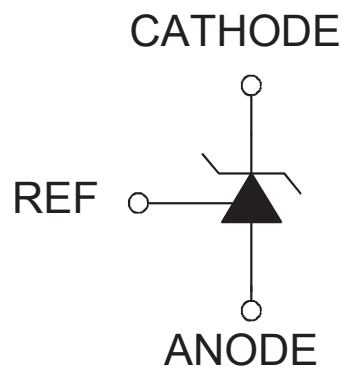


Test Circuits


Test Circuit 1

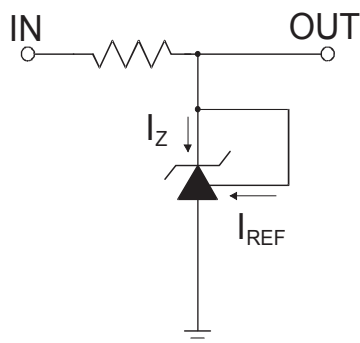

Test Circuit 2

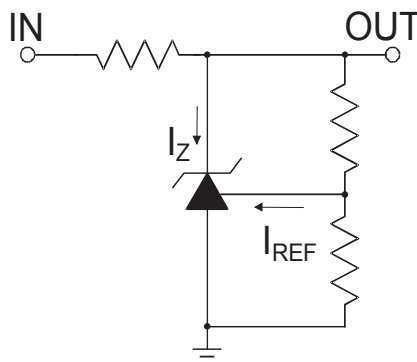

Test Circuit 3

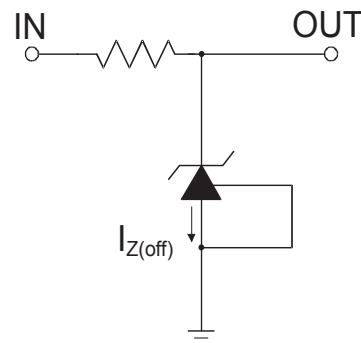

Ordering Information¹


Package	Bulk or Tape and Reel	Tolerance		
		0.5%	1.0%	2.0%
SOT23-3	Bulk	N/A	N/A	N/A
SOT23-5		N/A	N/A	N/A
TO92		AHK432ILY-.5-B1	AHK432ILY-1-B1	AHK432ILY-2-B1
SOT23-3	Tape and Reel	AHK432IGY-.5-T1	AHK432IGY-1-T1	N/A
SOT23-5		AHK432IGV-.5-T1	AHK432IGV-1-T1	N/A
TO-92	Ammo	AHK432ILY-.5-A1	AHK432ILY-1-A1	N/A



All AnalogicTech products are offered in Pb-free packaging. The term “Pb-free” means semiconductor products that are in compliance with current RoHS standards, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. For more information, please visit our website at <http://www.analogictech.com/aboutus/quality.php>.



Package Information

TO-92 (Bulk packing option)

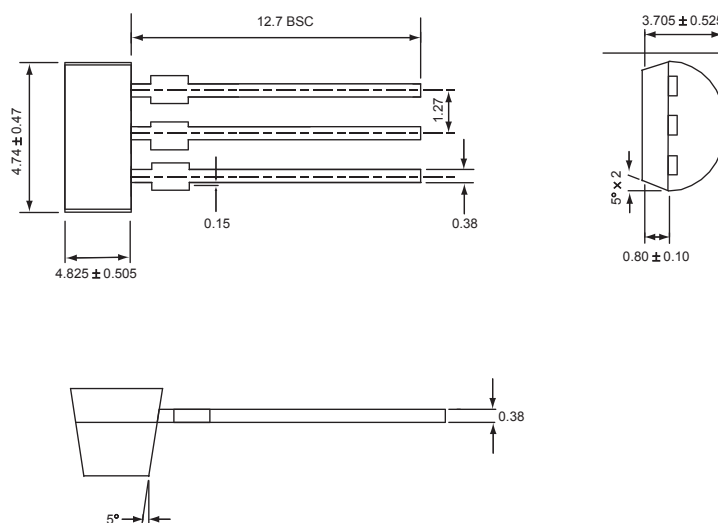


All dimensions in millimeters.

1. Sample stock is generally held on part numbers listed in **BOLD**.

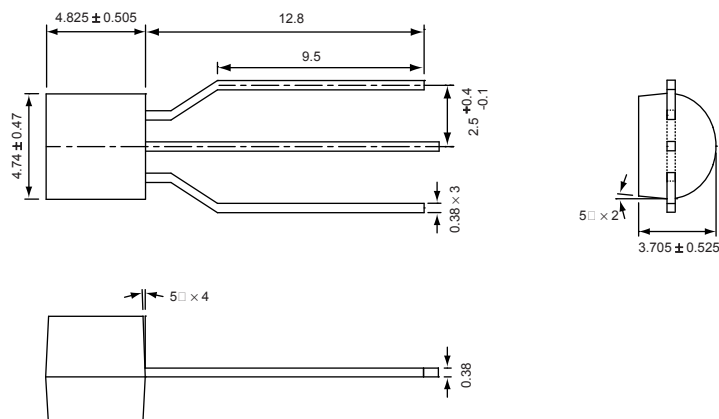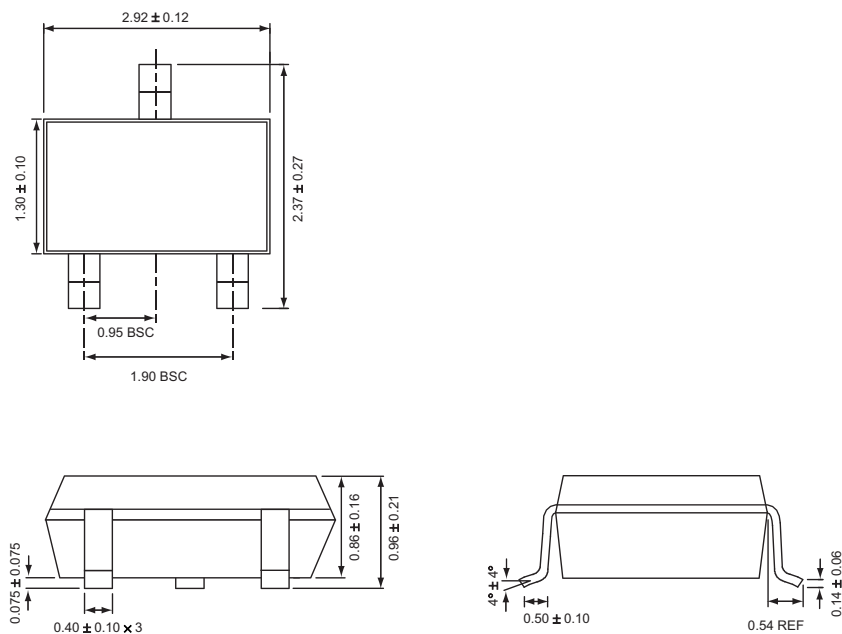Adjustable Low Voltage Shunt Regulator
TO-92 (Ammo packing option)

SOT23-3

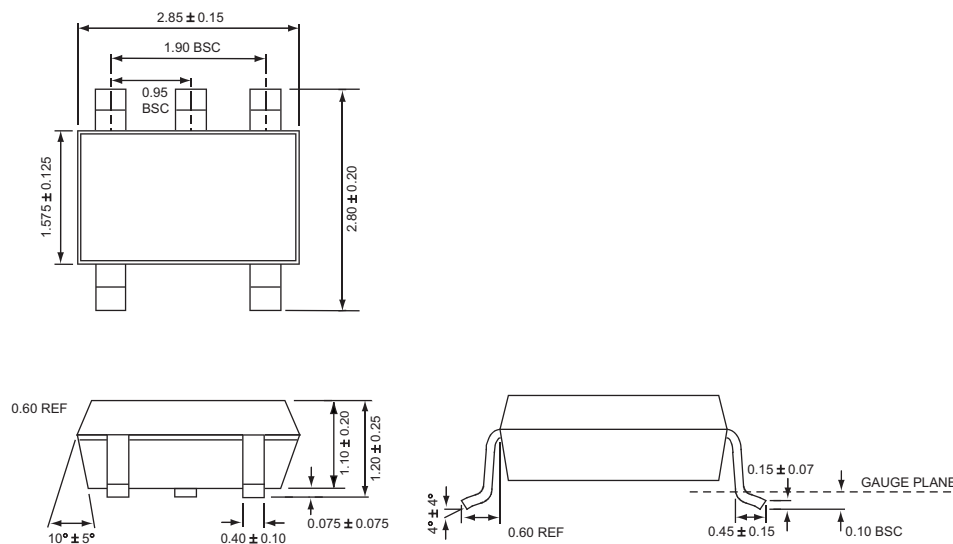
All dimensions in millimeters.

SOT23-5


All dimensions in millimeters.

Endnote: Life Support Policy

AnalogicTech's PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF Advanced Analogic Technologies Inc. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Advanced Analogic Technologies, Inc.
 3230 Scott Boulevard, Santa Clara, CA 95054
 Phone (408) 737-4600
 Fax (408) 737-4611



© Advanced Analogic Technologies, Inc.
 AnalogicTech cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an AnalogicTech product. No circuit patent licenses, copyrights, mask work rights, or other intellectual property rights are implied. AnalogicTech reserves the right to make changes to their products or specifications or to discontinue any product or service without notice. Except as provided in AnalogicTech's terms and conditions of sale, AnalogicTech assumes no liability whatsoever, and AnalogicTech disclaims any express or implied warranty relating to the sale and/or use of AnalogicTech products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards. Testing and other quality control techniques are utilized to the extent AnalogicTech deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed. AnalogicTech and the AnalogicTech logo are trademarks of Advanced Analogic Technologies Incorporated. All other brand and product names appearing in this document are registered trademarks or trademarks of their respective holders.