

Product Features

- 50 ~ 3000MHz
- GaAs MMIC
- 43dBm Output IP3
- 13.7dB Gain
- 24dBm P1 dB
- Single +9V Supply
- SOT-89 SMT Package

Applications

- CDMA, W-CDMA Medium Power Amplifier
- High Linearity Drive Amplifier



Package Type: SOT-89

Description

AP209 is a high linearity amplifier designed with GaAs MMIC in a low cost SOT-89 package. It is designed for applications such as GSM, CDMA, W-CDMA drive devices which require high IP3.

Absolute Maximum Ratings

PARAMETER	UNIT	MIN	MAX
Device Voltage	VDC		+12
RF Input Power(Continuous)	dBm		+10
Storage Temperature	°C	-40	+150

Operating Ranges


PARAMETER	UNIT	MIN	TYP	MAX
Operating Frequency	MHz	50		3000
Device Voltage	VDC		+9	+10
Case Temperature	°C	-40		+85

Electrical Specifications(Ta=+25 °C, V_{DD}=+9V&+7V, Test Freq=900 MHz)

PARAMETER	Units	Min	Typ	Max	Typ
Gain (S ₂₁)	dB	12	13.7		13.3
Input Return Loss (S ₁₁)	dB		-21		-20
Output Return Loss (S ₂₂)	dB		-17		-17
Output 3 rd Order Intercept Point (OIP3)	dBm	39	44		42
Output 1dB compression Point (P ₁ dB)	dBm		24		23
Noise Figure	dB		2.5		2.5
DC Operating Current	mA	90	120	140	117
Supply Voltage	Vdc		+9V		+7V
Thermal Resistance (R _{th})	°C/W			40	

OIP3 is measured with two tones, at an output power of +10dBm/tone separated by 1MHz.


Application Circuit (900MHz, Vdc=+9V)

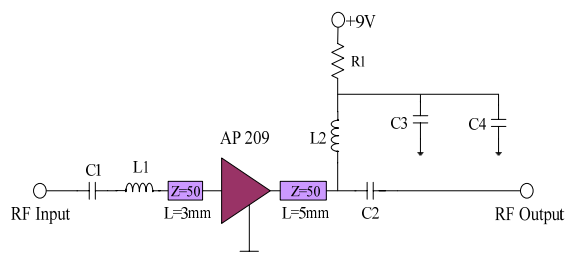


Bill of Material

Parameter		Parameter	
C1	100 pF	L1	3.9 nH
C2	6.0 pF	L2	18 nH
C3	100 pF	R1	0 Ω
C4	0.1 uF		


S-Parameter vs. Frequency

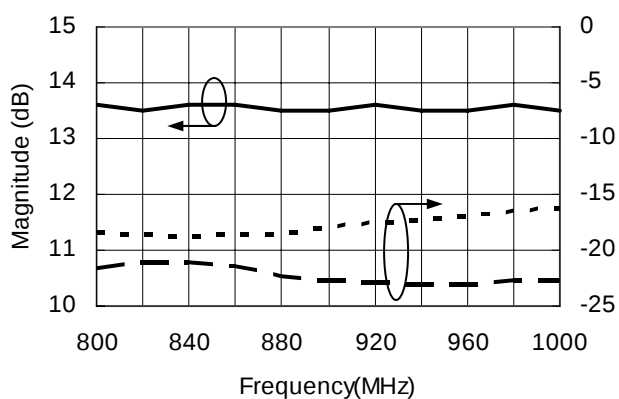


OIP3 vs. Frequency

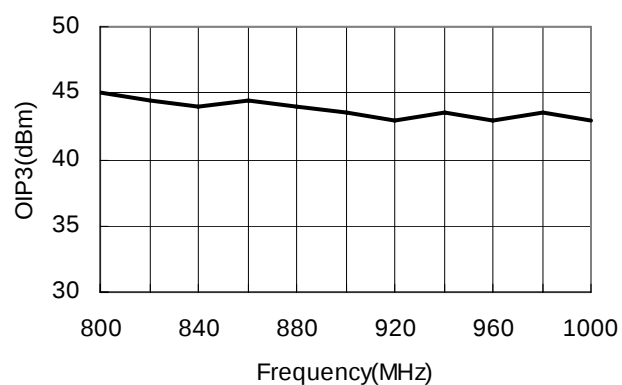


Noise Figure vs. Frequency

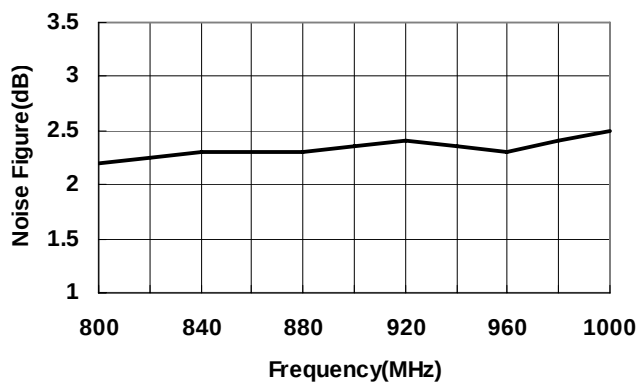

P1dB vs. Frequency

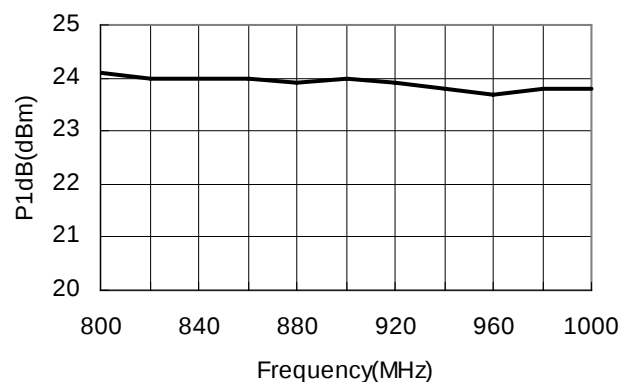


Application Circuit (1800MHz, Vdc=+9V)

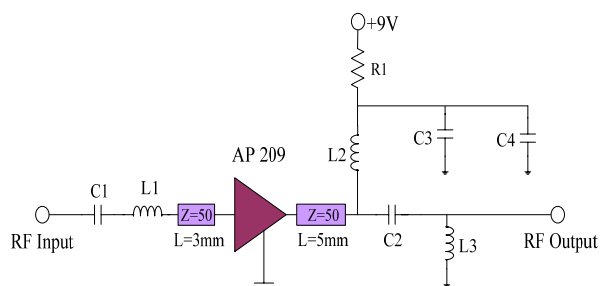


Bill of Material

Parameter		Parameter	
C1	2.0 pF	L1	3.9 nH
C2	6.0 pF	L2	18 nH
C3	100 pF	L3	4.7 nH
C4	0.1 uF	R1	0 Ω


S-Parameter vs. Frequency

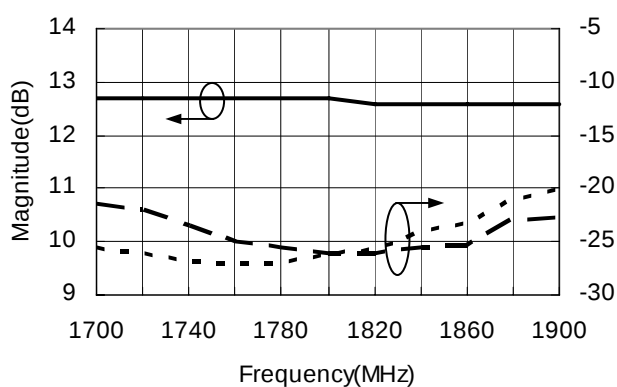


OIP3 vs. Frequency

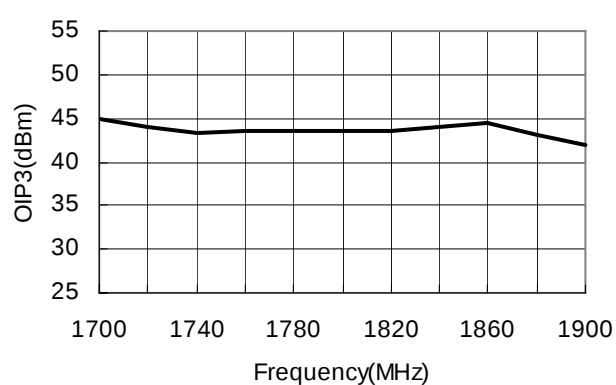


Noise Figure vs. Frequency

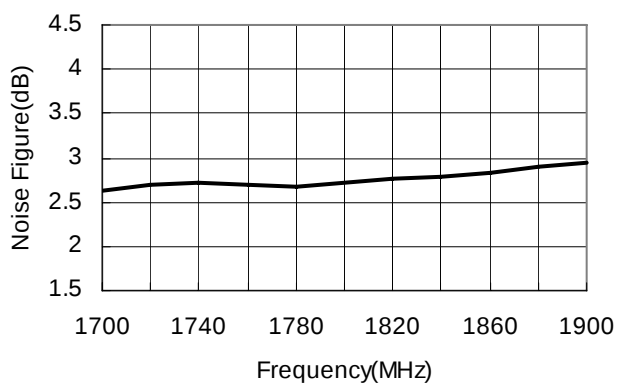

P1dB vs. Frequency

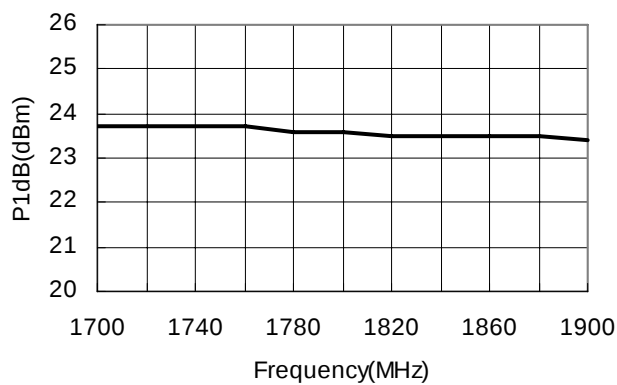


Application Circuit (900MHz, Vdc=+7V)

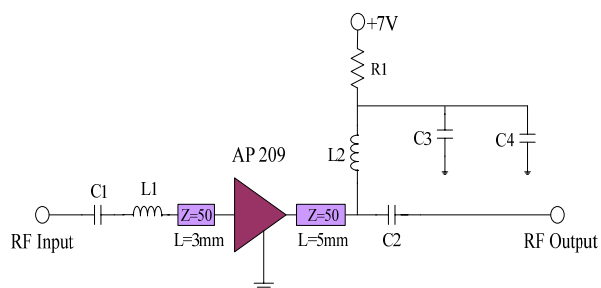


Bill of Material

Parameter		Parameter	
C1	100 pF	L1	3.9 nH
C2	6.0 pF	L2	18 nH
C3	100 pF	R1	0 Ω
C4	0.1 uF		


S-Parameter vs. Frequency

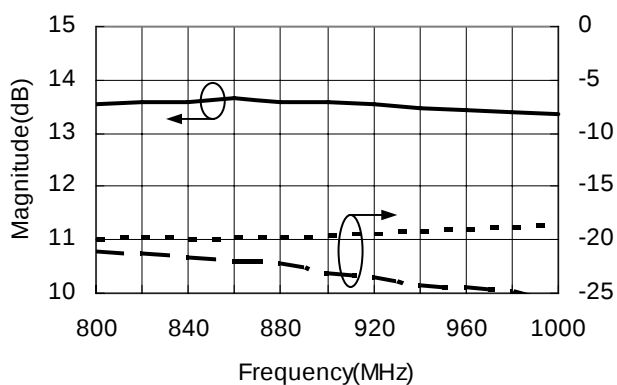


OIP3 vs. Frequency

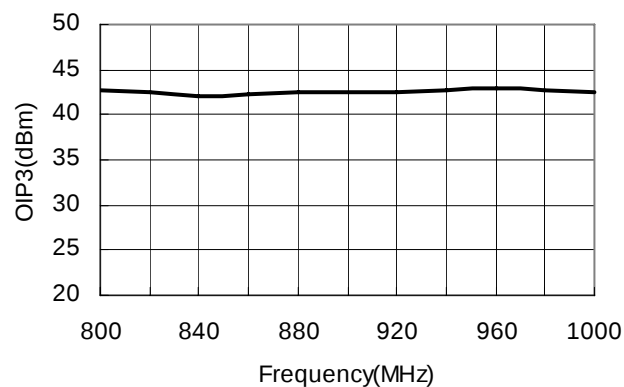


Noise Figure vs. Frequency

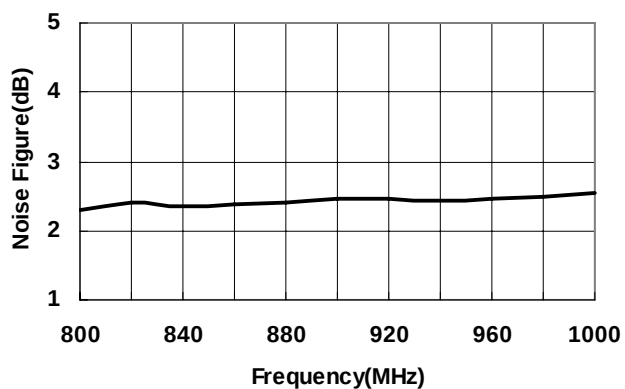

P1dB vs. Frequency

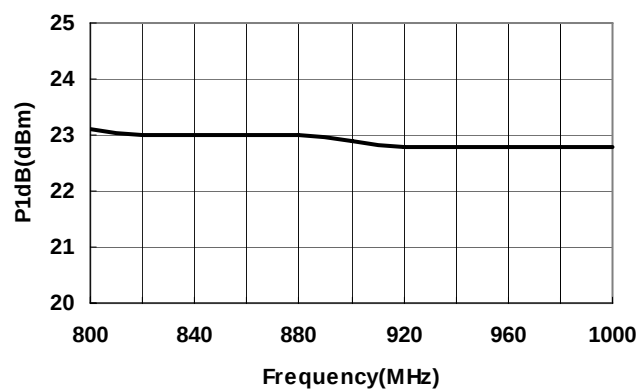


Application Circuit (1800MHz, Vdc=+7V)

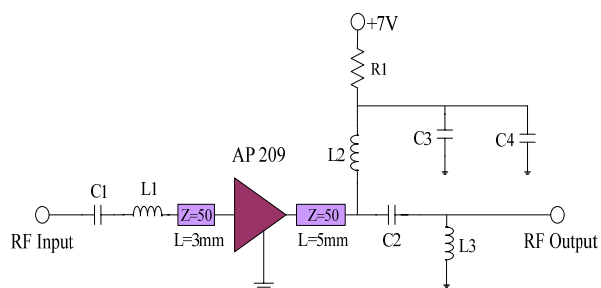


Bill of Material

Parameter		Parameter	
C1	2.0 pF	L1	3.9 nH
C2	6.0 pF	L2	18 nH
C3	100 pF	L3	4.7 nH
C4	0.1 uF	R1	0 Ω


S-Parameter vs. Frequency

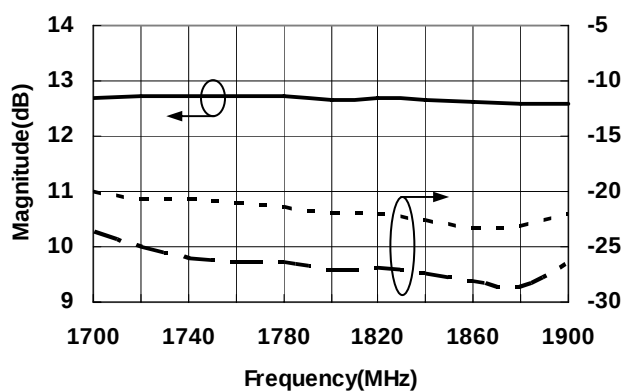


OIP3 vs. Frequency

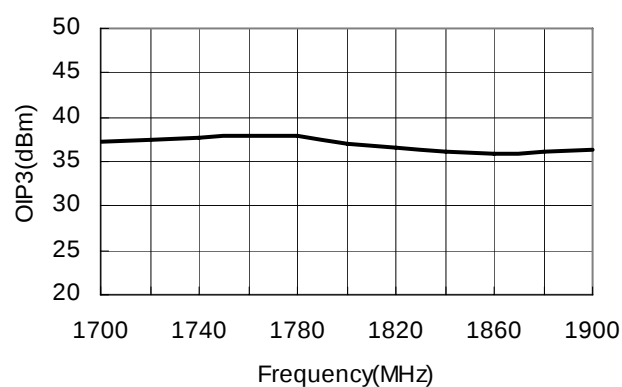


Noise Figure vs. Frequency

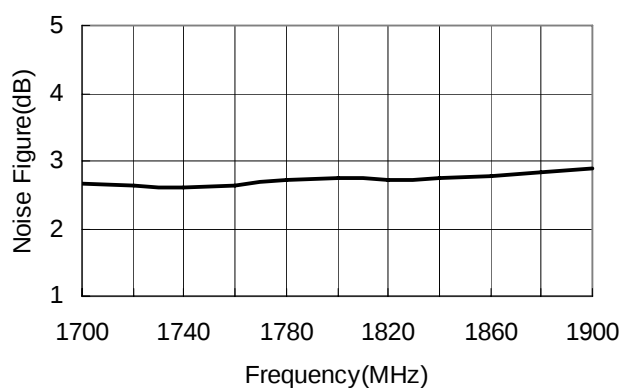

P1dB vs. Frequency

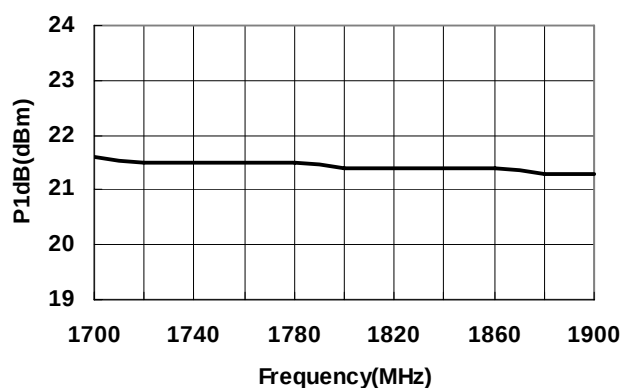


Application Circuit (2100MHz, Vdc=+9V)

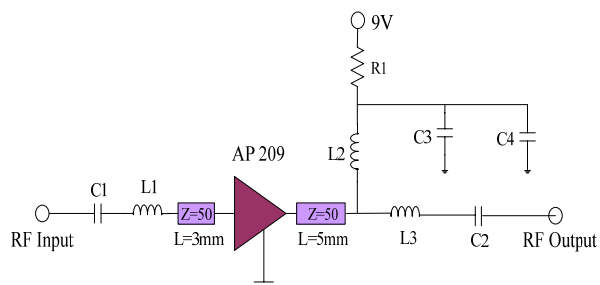


Bill of Material

Parameter		Parameter	
C1	1.2 pF	L1,L3	3.9 nH
C2	1.5 pF	L2	18 nH
C3	100 pF	R1	0 Ω
C4	0.1 uF		


S-Parameter vs. Frequency

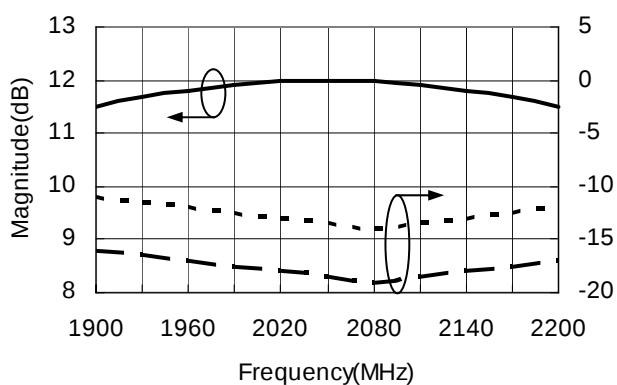


OIP3 vs. Frequency

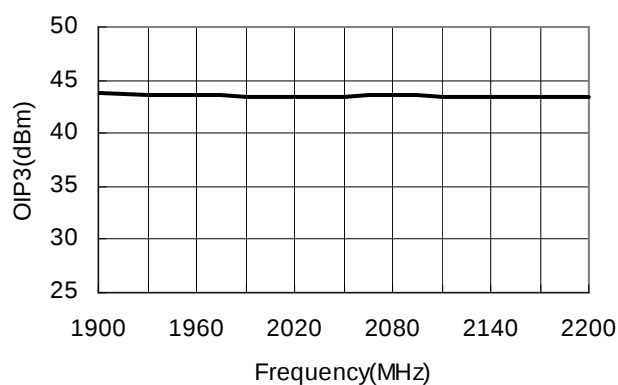


Noise Figure vs. Frequency

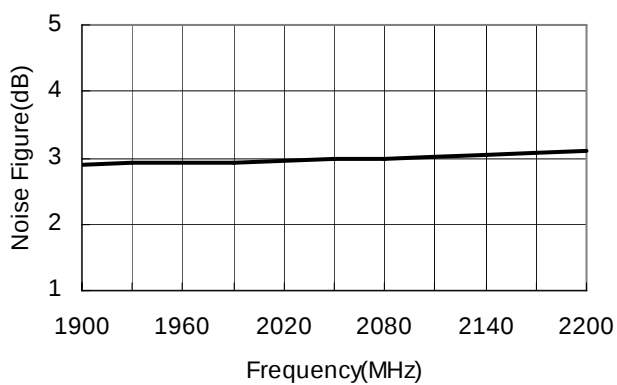

P1dB vs. Frequency

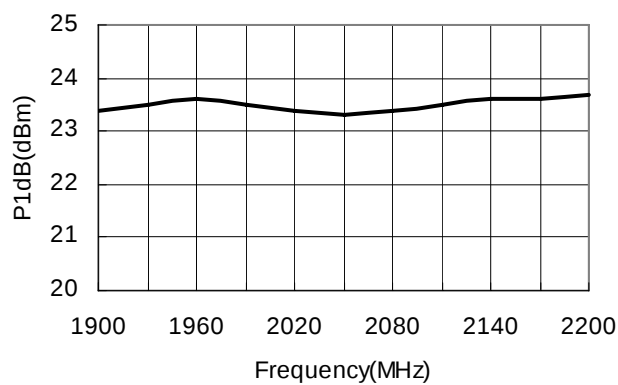


Application Circuit (2300MHz, Vdc=+9V)

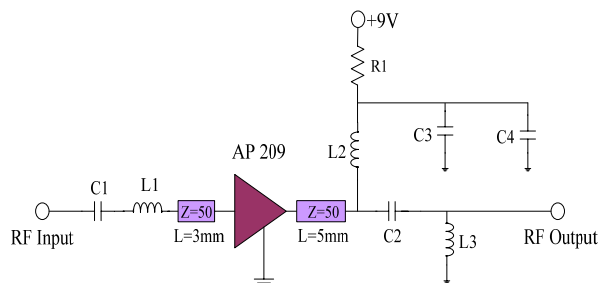


Bill of Material

Parameter		Parameter	
C1	0.75 pF	L1	3.9 nH
C2	2.7 pF	L2	18 nH
C3	100 pF	L3	2.7 nH
C4	0.1 uF	R1	0 Ω


S-Parameter vs. Frequency

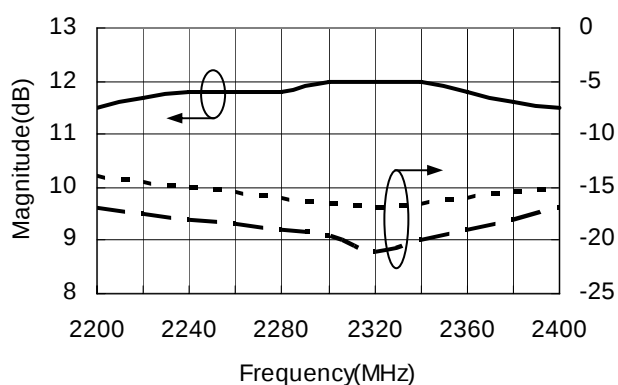


OIP3 vs. Frequency

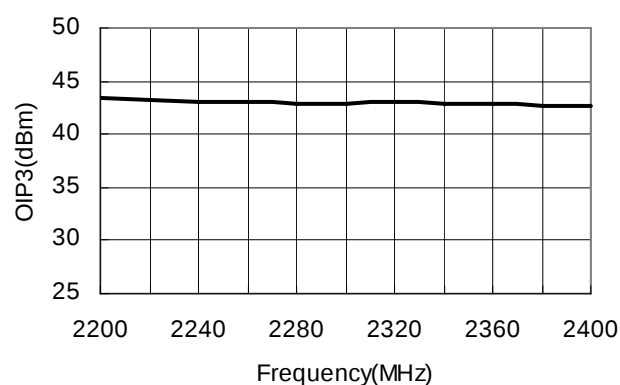


Noise Figure vs. Frequency

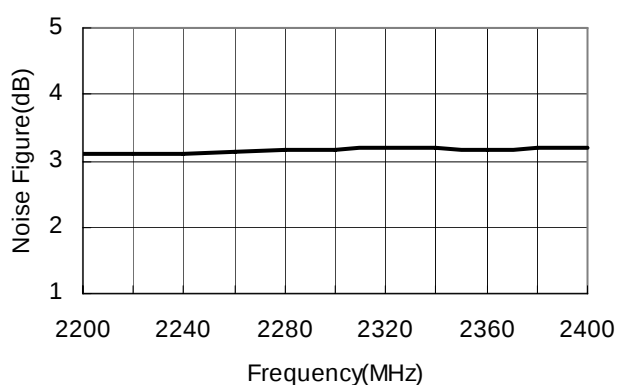

P1dB vs. Frequency

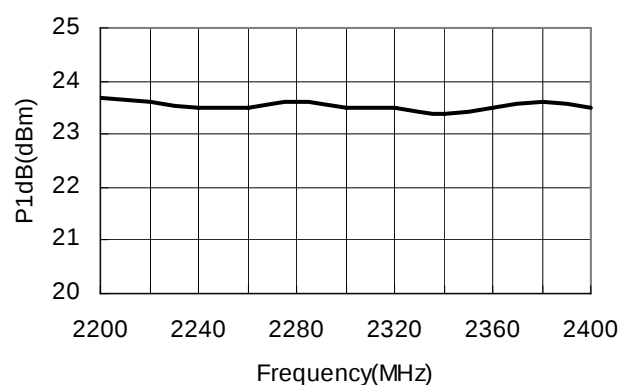


Application Circuit (2600MHz, Vdc=+9V)

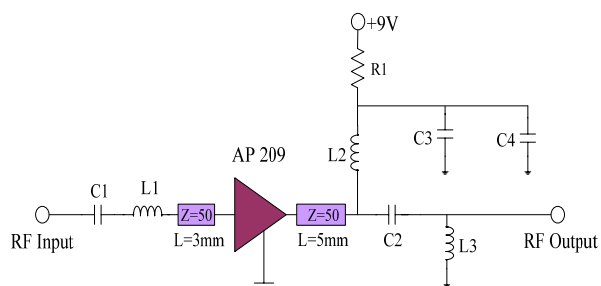


Bill of Material

Parameter		Parameter	
C1	0.75 pF	L1	2.7 nH
C2	2.0 pF	L2	18 nH
C3	100 pF	L3	1.8 nH
C4	0.1 uF	R1	0 Ω


S-Parameter vs. Frequency

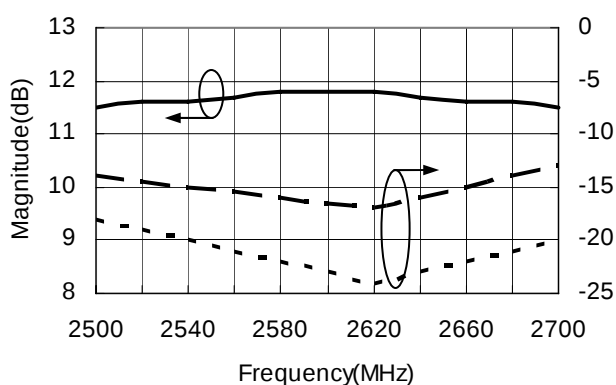


OIP3 vs. Frequency

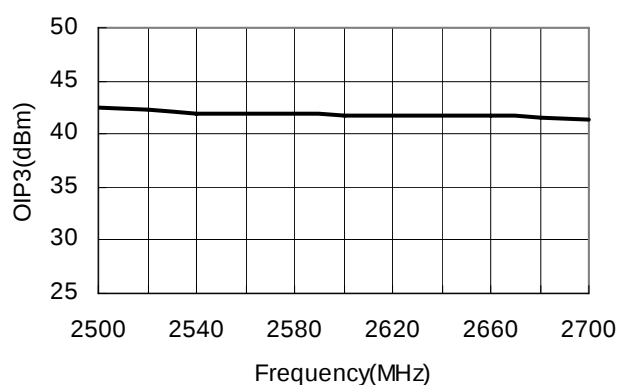


Noise Figure vs. Frequency

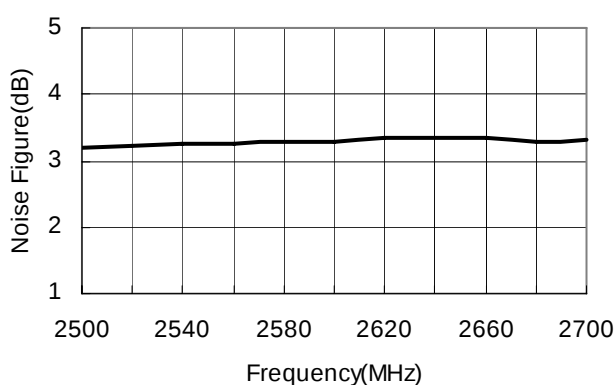

P1dB vs. Frequency

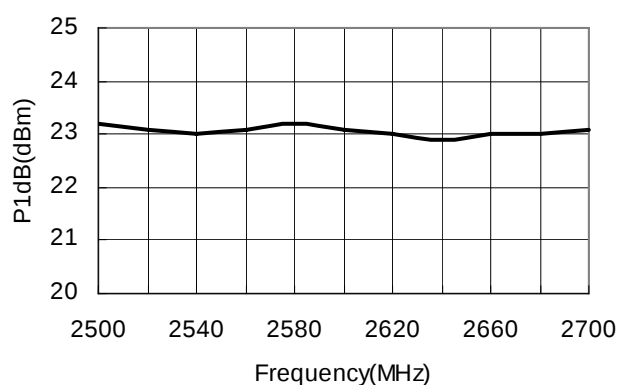


Application Circuit (50~1000MHz, Vdc=+9V)

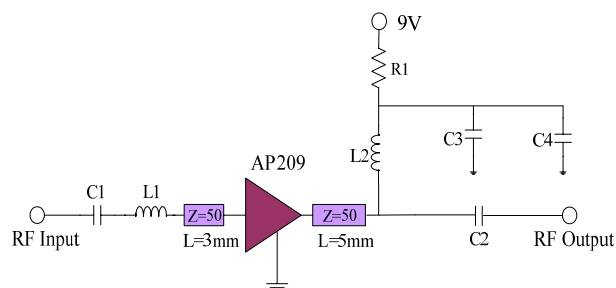


Bill of Material

Parameter		Parameter	
C1	1 nF	L1	6.8 nH
C2	1 nF	L2	1 uH Wirewound 2520Type
C3	100 pF		
C4	100 nF	R1	0 Ω


S-Parameter vs. Frequency

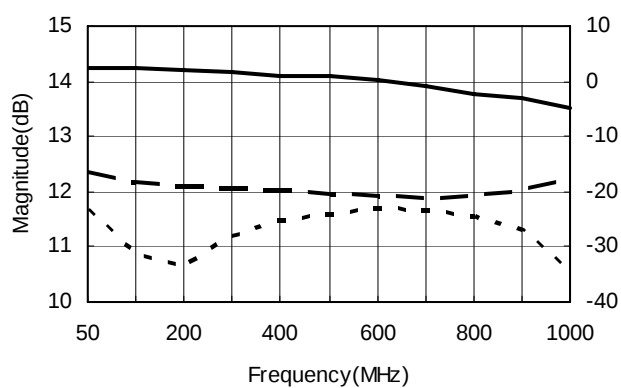


OIP3 vs. Frequency

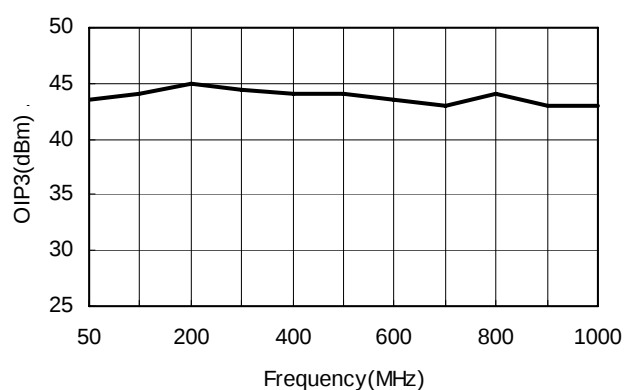



Noise Figure vs. Frequency

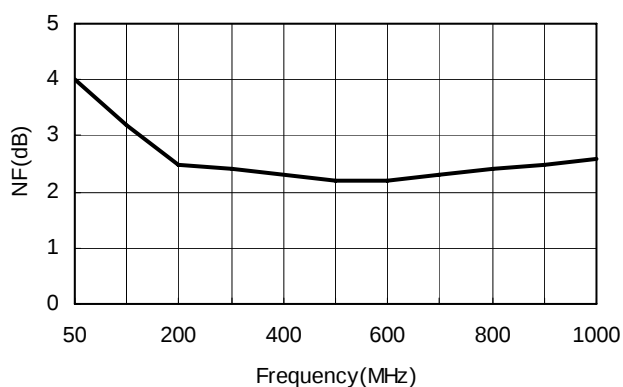


P1dB vs. Frequency

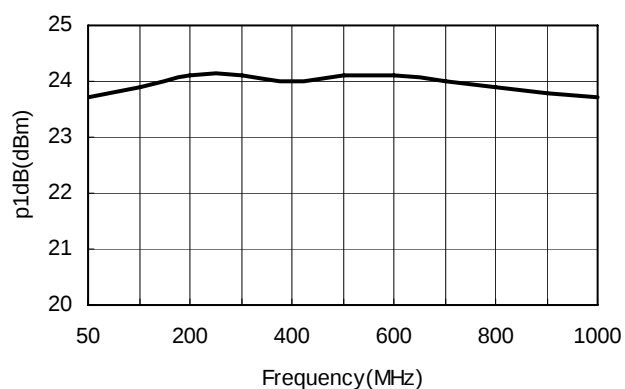

Package Dimensions (Type: SOT-89)

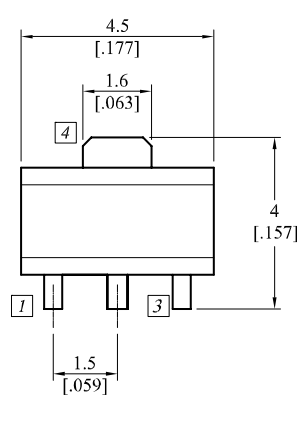

Unit : mm [inch]	Tolerance : $\pm \frac{0.2}{.008}$
---------------------	------------------------------------




Pin No	Function
1	Input
2	Ground
3	Output/Bias
4	Ground


! ESD sensitive

Observe precautions for handling, testing and packaging.

Recommended Pattern

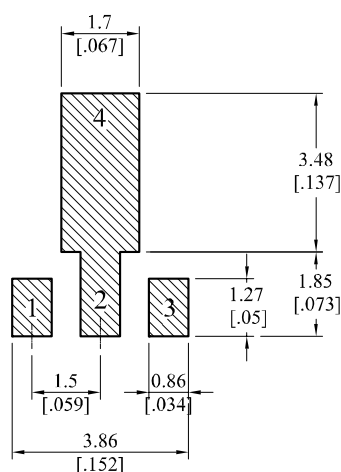

Recommended Mounting Configuration

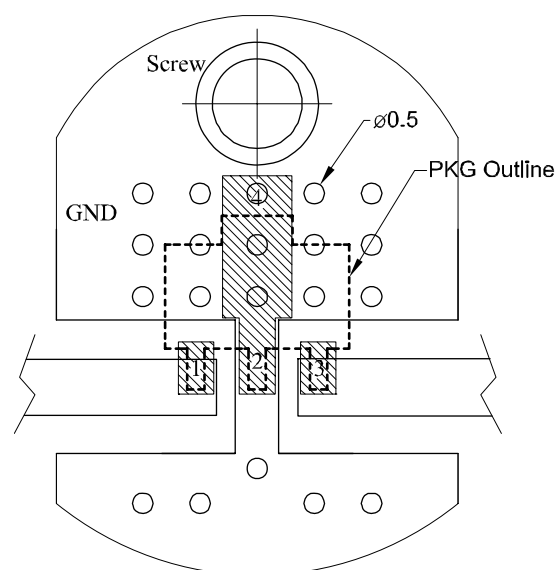

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.