



SAW Components

Data Sheet B4228

Data Sheet

A large, stylized, and somewhat abstract graphic of the EPCOS logo. The letters "EPCOS" are rendered in a bold, sans-serif font, appearing to be part of a larger, curved structure that resembles a stylized globe or a series of overlapping planes. The graphic is in grayscale and has a high-contrast, almost glowing appearance.



SAW Components

B4228

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Data Sheet



Characteristics

Reference temperature	T	$= 25 \pm 2^{\circ}\text{C}$
ANT terminating impedance	Z_{ANT}	$= 50 \Omega$
RX terminating impedance	Z_{RX}	$= 50 \Omega$
TX terminating impedance	Z_{TX}	$= 50 \Omega$

Characteristics TX - ANT		min.	typ.	max.	
Center frequency	f_c	—	836,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,2	2,4	dB
824,00 ... 849,00 MHz		—	2,2	2,4	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,1	dB
824,00 ... 849,00 MHz		—	0,8	1,1	dB
Return loss		7,5	8,2	—	dB
824,00 ... 849,00 MHz		7,5	8,2	—	dB
Attenuation	α	21	32	—	dB
0,03 ... 800,00 MHz		21	32	—	dB
869,00 ... 894,00 MHz		44	46	—	dB
914,00 ... 1004,00 MHz		30	34	—	dB
1004,00 ... 3200,00 MHz		20	23	—	dB
1648,00 ... 1698,00 MHz		30	38	—	dB
2472,00 ... 2547,00 MHz		20	25	—	dB

Characteristics ANT - RX		min.	typ.	max.	
Center frequency	f_c	—	881,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,9	3,3	dB
869,00 ... 894,00 MHz		—	2,9	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,0	1,8	dB
869,00 ... 894,00 MHz		—	1,0	1,8	dB
Return loss		9,0	10,0	—	dB
869,00 ... 894,00 MHz		9,0	10,0	—	dB
Attenuation	α	35	40	—	dB
0,03 ... 824,00 MHz		35	40	—	dB
824,00 ... 849,00 MHz		54	55	—	dB
914,00 ... 1000,00 MHz		36	40	—	dB
1000,00 ... 1200,00 MHz		36	39	—	dB
1200,00 ... 3200,00 MHz		30	35	—	dB

Characteristics TX - RX		min.	typ.	max.	
Isolation between TX and RX path	α	54	56	—	dB
824,00 ... 849,00 MHz		54	56	—	dB
869,00 ... 894,00 MHz		45	46	—	dB



SAW Components

B4228

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Data Sheet



Characteristics

Reference temperature	T	= -30 to 85 °C
ANT terminating impedance	Z_{ANT}	= 50 Ω
RX terminating impedance	Z_{RX}	= 50 Ω
TX terminating impedance	Z_{TX}	= 50 Ω

Characteristics TX - ANT		min.	typ.	max.	
Center frequency	f_c	—	836,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,2	2,5	dB
824,00 ... 849,00 MHz		—	2,2	2,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,1	dB
824,00 ... 849,00 MHz		—	0,8	1,1	dB
Return loss		7,5	8,2	—	dB
824,00 ... 849,00 MHz		7,5	8,2	—	dB
Attenuation	α	21	32	—	dB
0,03 ... 800,00 MHz		21	32	—	dB
869,00 ... 894,00 MHz		44	45	—	dB
914,00 ... 1004,00 MHz		30	34	—	dB
1004,00 ... 3200,00 MHz		20	23	—	dB
1648,00 ... 1698,00 MHz		30	38	—	dB
2472,00 ... 2547,00 MHz		20	25	—	dB

Characteristics ANT - RX		min.	typ.	max.	
Center frequency	f_c	—	881,5	—	MHz
Maximum insertion attenuation	α_{max}	—	3,4	3,8	dB
869,00 ... 894,00 MHz		—	3,4	3,8	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,5	2,3	dB
869,00 ... 894,00 MHz		—	1,5	2,3	dB
Return loss		9,0	10,0	—	dB
869,00 ... 894,00 MHz		9,0	10,0	—	dB
Attenuation	α	35	40	—	dB
0,03 ... 824,00 MHz		35	40	—	dB
824,00 ... 849,00 MHz		53	54	—	dB
914,00 ... 1000,00 MHz		36	40	—	dB
1000,00 ... 1200,00 MHz		36	39	—	dB
1200,00 ... 3200,00 MHz		30	35	—	dB

Characteristics TX - RX		min.	typ.	max.	
Isolation between TX and RX path	α	52	53	—	dB
824,00 ... 849,00 MHz		52	53	—	dB
869,00 ... 894,00 MHz		45	46	—	dB



SAW Components

B4228


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Data Sheet



Frequency Response TX - ANT

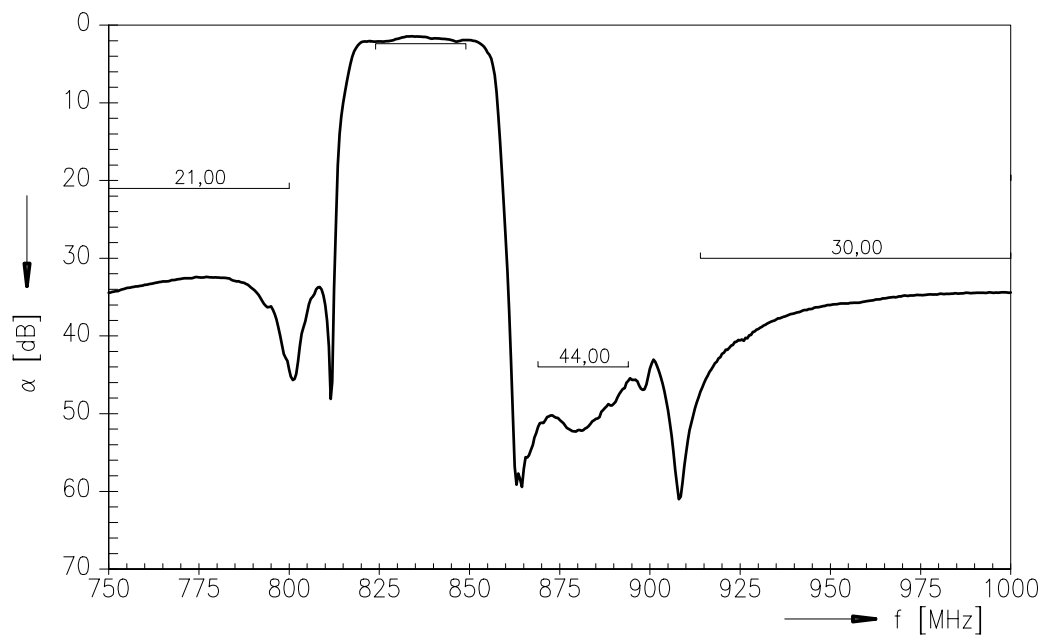

Frequency Response TX - ANT (wideband)

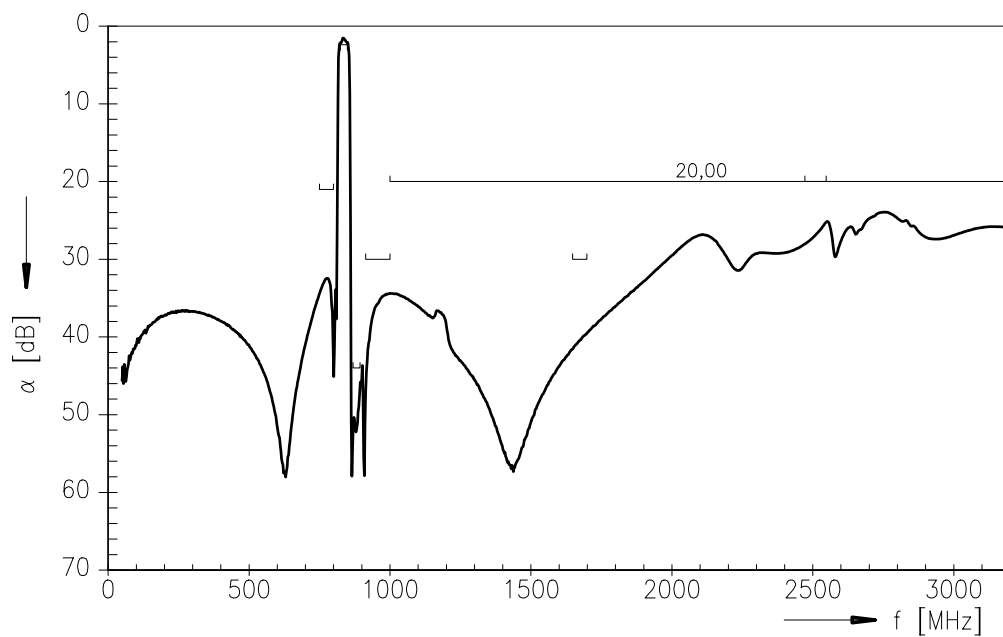



SAW Components

B4228


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Data Sheet



Frequency Response ANT - RX

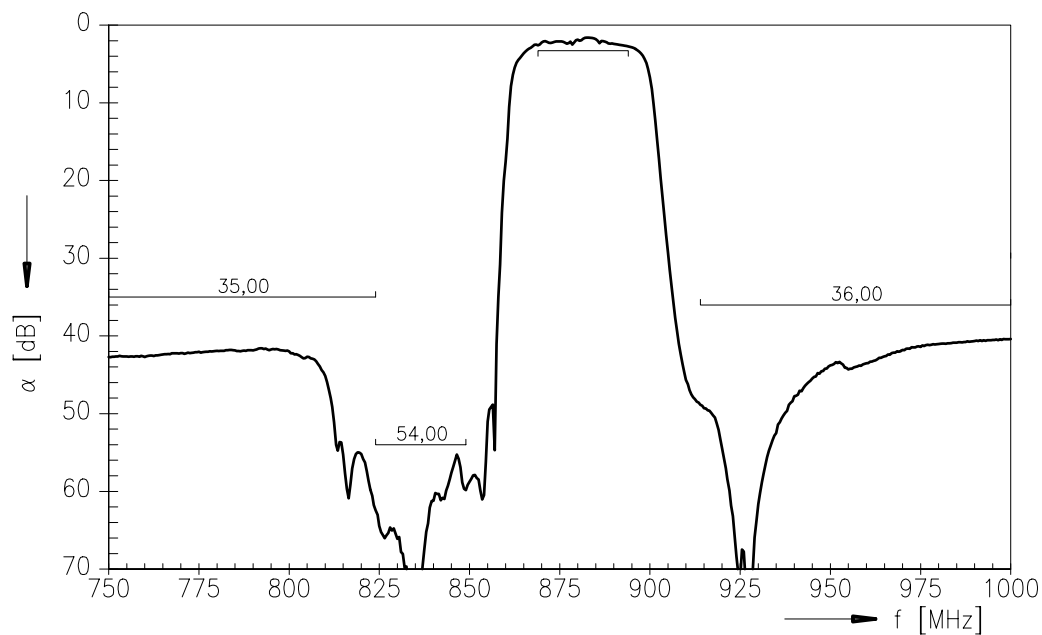

Frequency Response ANT - RX (wideband)

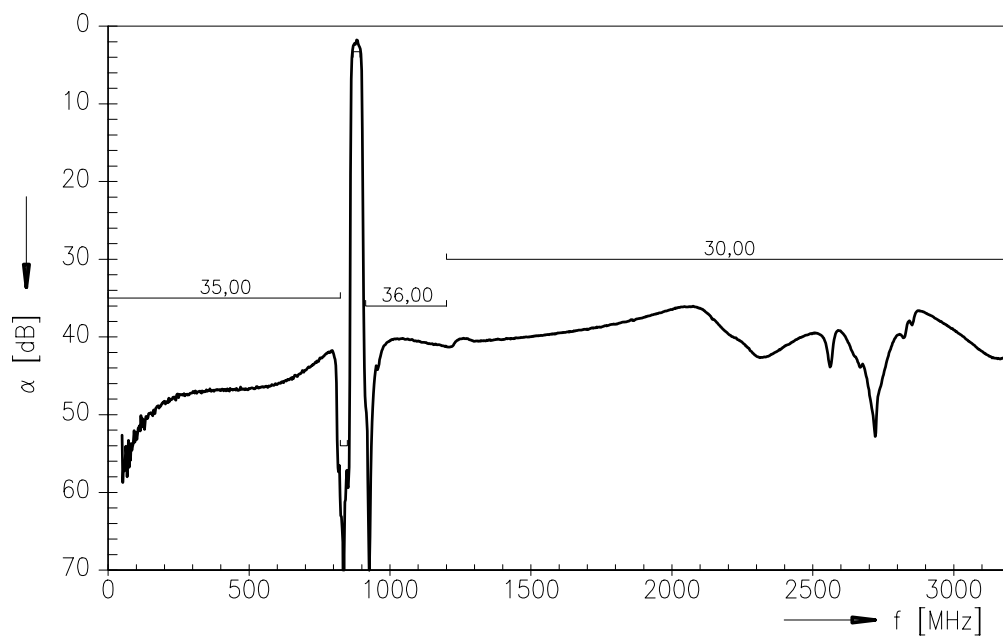



SAW Components

B4228


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Data Sheet



Frequency Response TX - RX

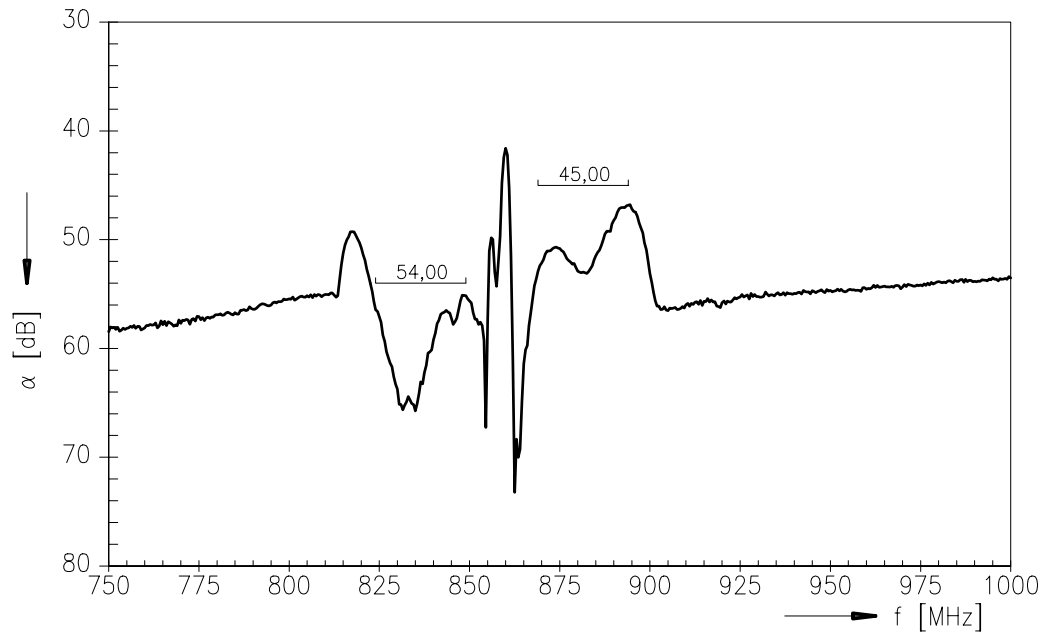

Frequency Response TX - RX (wideband)

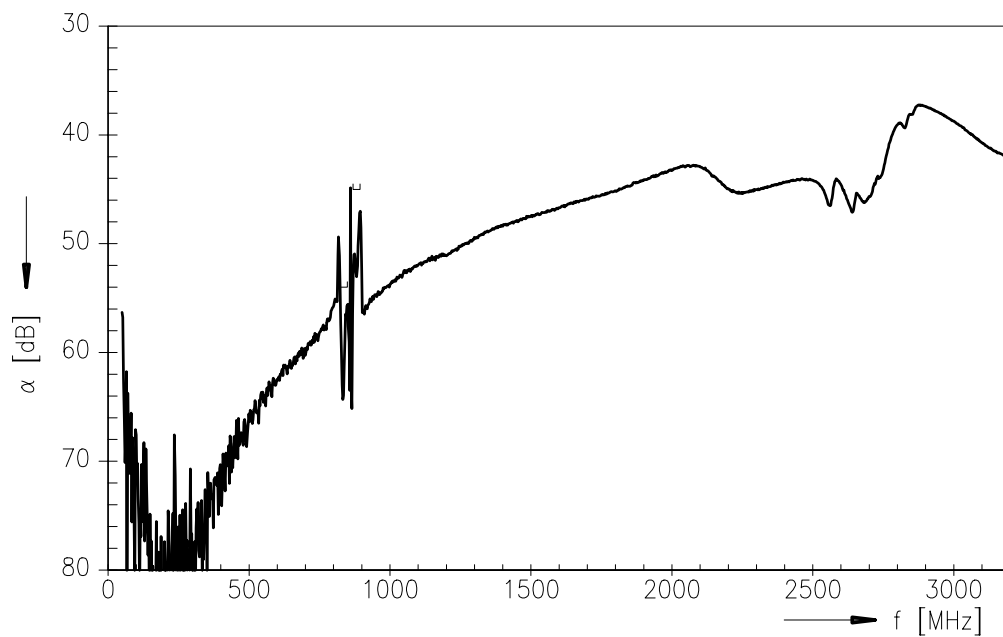



SAW Components	B4228
Low-Loss Filter for Mobile Communication	836,5 / 881,5 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2002. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.