

isc Silicon NPN Power Transistor

BD201F/203F

DESCRIPTION

- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 45V(\text{Min})$ - BD201F
60V(Min)- BD203F
- Complement to Type BD202F/204F
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Designed for use in hi-fi equipment delivering an output of 15 to 15 W into a 4 Ω or 8 Ω load.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	BD201F 60	V
		BD203F 60	
V_{CEO}	Collector-Emitter Voltage	BD201F 45	V
		BD203F 60	
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	8	A
I_{CM}	Collector Current-Peak	12	A
I_B	Base Current	3	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	60	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	6.3	$^\circ\text{C/W}$

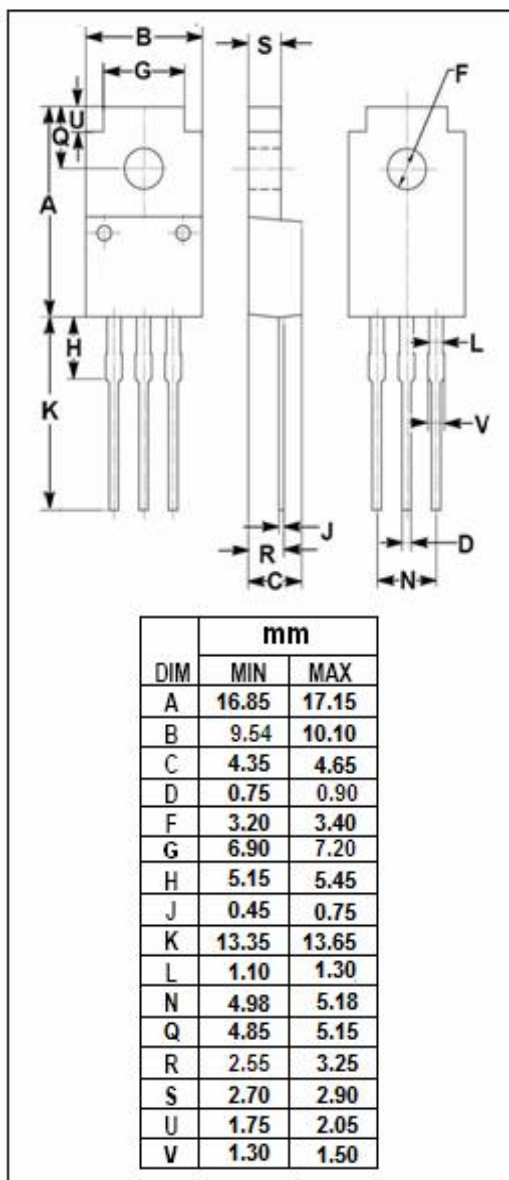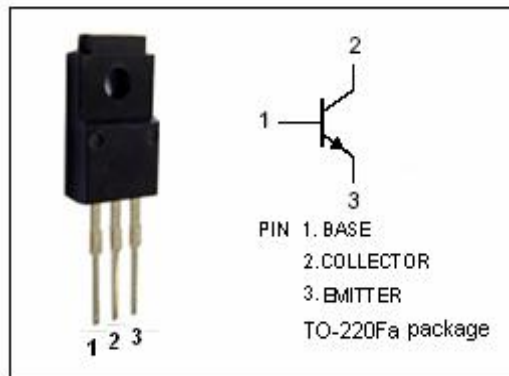

isc Silicon NPN Power Transistor

BD201F/203F

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	BD201F	$I_C = 50\text{mA}; I_B = 0$	45		V
		BD203F		60		
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage		$I_C = 1\text{mA}; I_E = 0$	60		V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage		$I_E = 1\text{mA}; I_C = 0$	5		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage		$I_C = 3\text{A}; I_B = 0.3\text{A}$		1.0	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage		$I_C = 6\text{A}; I_B = 0.6\text{A}$		1.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage		$I_C = 6\text{A}; I_B = 0.6\text{A}$		2.0	V
$V_{BE(on)}$	Base-Emitter On Voltage		$I_C = 3\text{A}; V_{CE} = 2\text{V}$		1.5	V
I_{CEO}	Collector Cutoff Current		$V_{CE} = 30\text{V}; I_B = 0$		0.2	mA
I_{CBO}	Collector Cutoff Current		$V_{CB} = V_{CBO}; I_E = 0$ $V_{CB} = \frac{1}{2}V_{CBO}; I_E = 0; T_J = 150^{\circ}\text{C}$		0.1 1.0	mA
I_{EBO}	Emitter Cutoff Current		$V_{EB} = 5\text{V}; I_C = 0$		0.5	mA
h_{FE-1}	DC Current Gain	BD201F	$I_C = 3\text{A}; V_{CE} = 2\text{V}$	30		
		BD203F	$I_C = 2\text{A}; V_{CE} = 2\text{V}$			
h_{FE-2}	DC Current Gain		$I_C = 1\text{A}; V_{CE} = 2\text{V}$	30		
f_T	Current-Gain—Bandwidth Product		$I_C = 0.3\text{A}; V_{CE} = 3\text{V}, f_{test} = 1.0\text{MHz}$	7.0		MHz

Switching Times

t_{on}	Turn-On Time	$I_C = 2\text{A}; I_{B1} = -I_{B2} = 0.2\text{A}$		1	μs
t_{off}	Turn-Off Time			4	μs

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.