

Product Specification

TFT LCD

Specification

This module uses ROHS material

() Preliminary Specification

(●) Final Specification

Title	1.44" SQQVGA TFT LCD
-------	----------------------

Customer	
MODEL	

SUPPLIER	B&H Korea Co., Ltd.
MODEL	BHT144D2705
Revision	Ver 1.0

SIGNATURE	DATE
/	
/	
/	

Please return 1 copy for your confirmation with your signature and comments.

SIGNATURE	DATE
/	
/	
/	

Products Engineering Dept.
B&H Korea Co., Ltd

Product Specification

Contents

NO	ITEM	Page
	COVER	
	CONTENTS	
	RECORD OF REVISIONS	
	SPECIFICATIONS GENERAL	
	RATINGS MAXIMUM ABSOLUTE	
	CHARACTERISTICS ELECTRICAL	
	CHARACTERISTICS BACKLIGHT	
	DRAWING DIMENSIONAL	
	CONNECTIONS PIN INTERFACE	
	CHARACTERISTICS OPTICAL-ELECTRO	
	CRITERIA INSPECTION	
	RELIABILITY	
	MODULE LCD USING FOR PRECAUTIONS	
	MODULES LCD USING	

Product Specification

RECORD OF REVISIONS

Revision No	Revision Date	Description
1.0	Jul. 30. 2013	First Draft

Product Specification

1.0 General Specifications

BHT144D2705 is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel, driver IC, FPC and a back light unit.

The module display area contains 128X128 pixels and can display up to 65K colors.

This product accords with ROHS environmental criterion

General Features

Item	Contents	Unit
LCD Type	TFT Transmissive	
Viewing direction	12:00	O' Clock
Module outline (W x H x D)	30.9 x 36.51 x 2.6	mm
Active area (W x H)	25.4976 x 26.496	mm
Number of Dots	128(RGB) x 128	
Driver IC	ILI9163C	
Color	65K	
Backlight Type	LED	
Interface Type	System Parallel interface	
Input voltage	2.8	V

Product Specification

2.0 ABSOLUTE MAXIMUM

Parameter	Symbol	Min	Max	Unit
Supply voltage for logic	Vcc1,Vcc2	-0.3	4.6	V
Input voltage	Vin	-0.3	VCC+ 0.3	V
Operating temperatur	Top	-20	70	°C
Storage temperature	Tst	-30	80	°C
Humidity	RH	--	90%(Max60C)	RH

3.0 ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage for logic	Vcc -Vss	2.4	2.8	3.2	V
Input Current	Idd	--	10	--	mA
Input voltage ' H ' level	Vih	0.7Vdd	--	Vdd	V
Input voltage ' L ' level	Vil	-Vss	--	0.2 Vdd	V
Output voltage ' H ' level	Voh	0.8 Vcc	--	Vcc	V
Output voltage ' L ' level	Vol	0	0	0.2 Vcc	V

4.0 BACKLIGHT CHARACTERISTICS

Item	Symbol	Min	Typ	Max	Unit	Condition
Forward voltage	Vf	3.0	3.2	3.5	V	--
Luminance	Lv	--	3000	--	cd/m2	If=30mA
Number of LED	--	1			Piece	--
Connection mode	P	serial			--	--

Using condition: constant current driving method If= 30 mA(+/-10%)

5.0 DIMENSIONAL DRAWING



Product Specification

6.0 INTERFACE PIN CONNECTIONS

Pin.No	Symbol	Function
1	VDD	Power supply
2	VSS	Ground
3	VSS	Ground
4	VSS	Ground
5	CS0	Chip select signal
6	CD	data or command select signal input
7	RD	Read signal
8	WR	Write signal
9	RSTB	Reset signal
10	D0	Data bus
11	NC	NC
12	D1	Data bus
13	NC	NC
14	D2	Data bus
15	NC	NC
16	D3	Data bus
17	NC	NC
18	D4	Data bus
19	NC	NC
20	D5	Data bus
21	NC	NC
22	D6	Data bus
23	NC	NC
24	D7	Data bus
25	NC	NC
26	LED-	back light power supply negative
27	LED+	back light power supply positive

6.1 TIMING CHARACTERISTICS

6.1.1 Parallel interface characteristics: 18, 16, 9 or 8-bits bus (8080-series MCU interface)

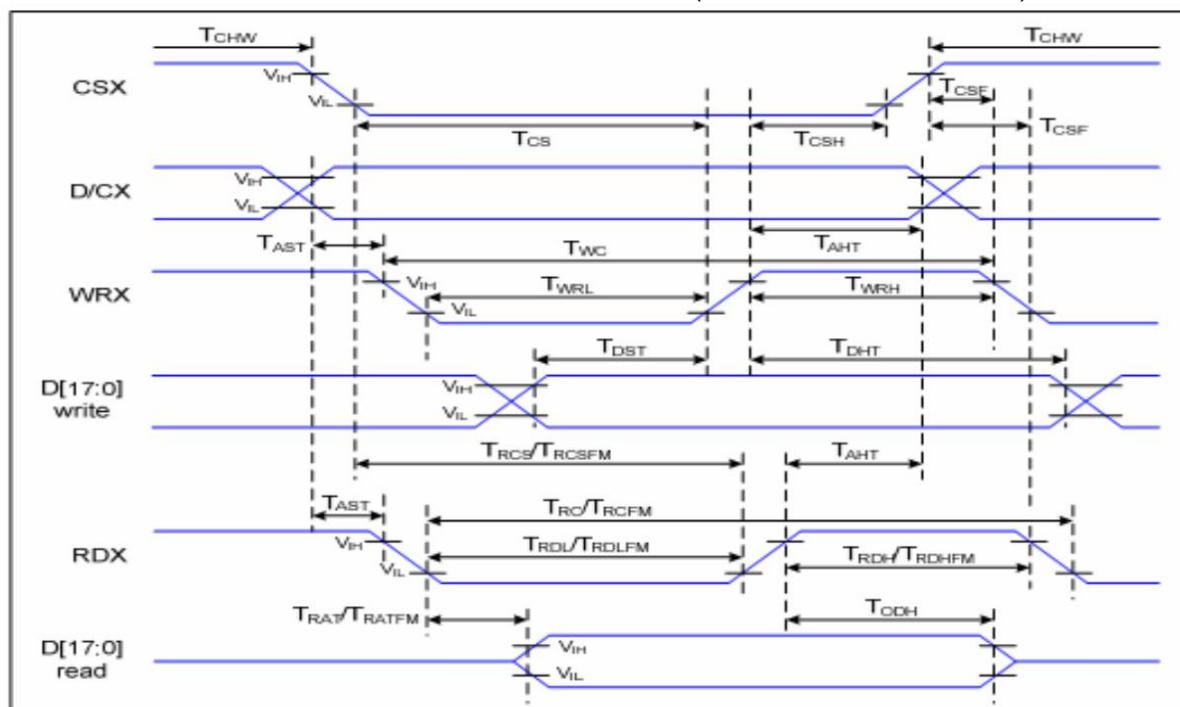


Fig. 8.1.1 Parallel interface timing characteristics (8080 series MCU interface)

Signal	Symbol	Parameter	Min	Max	Unit	Description
D/CX	TAST	Address setup time	10		ns	-
	TAHT	Address hold time (Write/Read)	10		ns	
CSX	TCHW	Chip select "H" pulse width	0		ns	-
	TCS	Chip select setup time (Write)	15		ns	
	TRCS	Chip select setup time (Read ID)	45		ns	
	TRCSFM	Chip select setup time (Read FM)	350		ns	
	TCSF	Chip select wait time (Write/Read)	10		ns	
	TCSH	Chip select hold time	10		ns	
WRX	TWC	Write cycle	100		ns	
	TWRH	Control pulse "H" duration	30		ns	
	TWRL	Control pulse "L" duration	30		ns	
RDX (ID)	TRC	Read cycle (ID)	160		ns	When read ID data
	TRDH	Control pulse "H" duration (ID)	90		ns	
	TRDL	Control pulse "L" duration (ID)	45		ns	
RDX (FM)	TRCFM	Read cycle (FM)	450		ns	When read from frame memory
	TRDHFM	Control pulse "H" duration (FM)	150		ns	
	TRDLFM	Control pulse "L" duration (FM)	150		ns	

Product Specification

6.2 Reset Input Timing

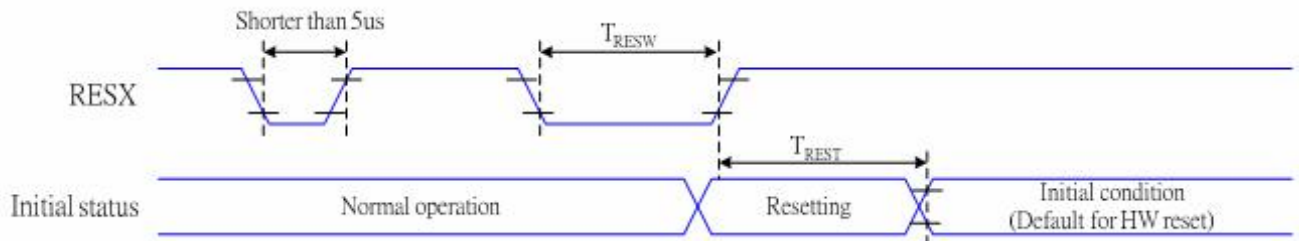


Table 9.16.1 Reset timing

Related Pins	Symbol	Parameter	MIN	MAX	Unit
RESX	t_{RESW}	Reset pulse duration	10	-	us
	t_{REST}	Reset cancel	-	5	ms
			-	120	ms

Notes:

1. The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from EEPROM (or similar device) to registers. This loading is done every time when there is HW reset cancel time (t_{RT}) within 5 ms after a rising edge of RESX.
2. Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below.


RESX Pulse	Action
Shorter than 5us	Reset Rejected
Longer than 9us	Reset
Between 5us and 9us	Reset starts

Product Specification

7. ELECTRO-OPTICAL CHARACTERISTICS

Item	Symbol	Condition	Temp	Min	Typ	Max	Units	Note
Operating Volt	VLCD	$\theta=\psi=0$	-10°C	----	----	----	V	8.1
			25°C	----	8.5	----		
			60°C	----	----	----		
Response Time	Rise Time (Tr)	$\theta=\psi=0$	-10°C	----	----	----	msec	8.2
	Decay Time (Td)			----	----	----		
	Rise Time (Tr)		25°C	----	----	240		
	Decay Time (Td)			----	----	240		
	Rise Time (Tr)		60°C	----	----	----		
	Decay Time (Td)			----	----	----		
Viewing Angle Range	θ	$\psi=0^\circ$	25°C	----	----	30	Deg	8.3 CR \geq 2
		$\psi=90^\circ$		----	----	30		
		$\psi=180^\circ$		----	----	30		
		$\psi=270^\circ$		----	----	30		
Contrast Ratio	Cr	$\theta=\psi=0$	25°C	3	4.5	----	---	8.4


7.1 ELECTRO-OPTICAL CHARACTERISTICS TEST METHOD

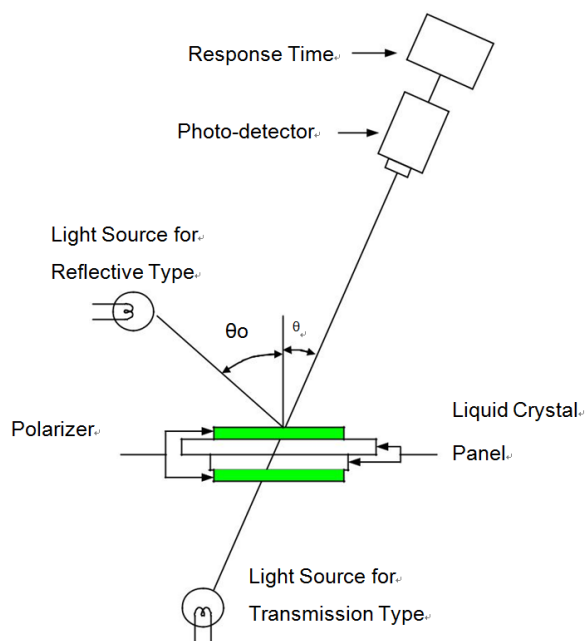


Product Specification

7.2 DEFINITION OF OPERATING VOLTAGE, VOP

$$V_{op} = (V_{10,ON} + V_{90,OFF}) / 2$$

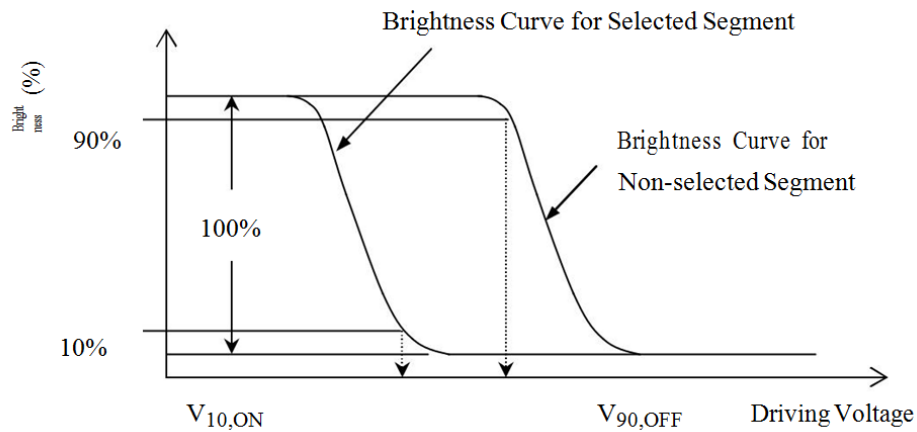


7.3 DEFINITION OF OPTICAL RESPONSE TIME

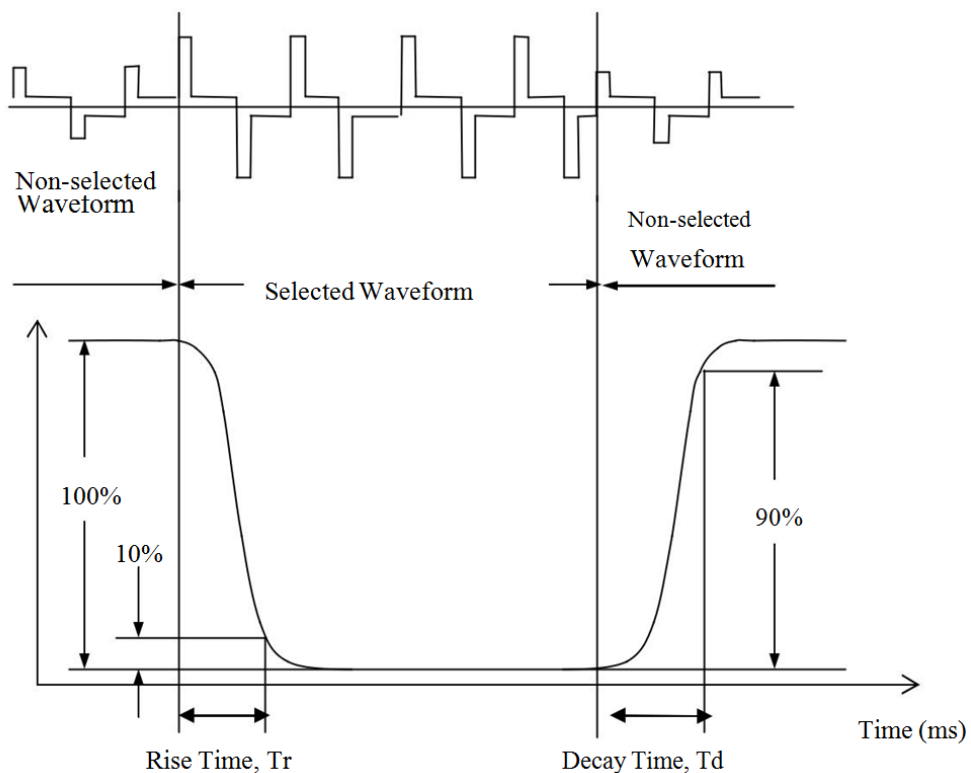


Product Specification

7.4 DEFINITION OF VIEWING ANGLE θ AND

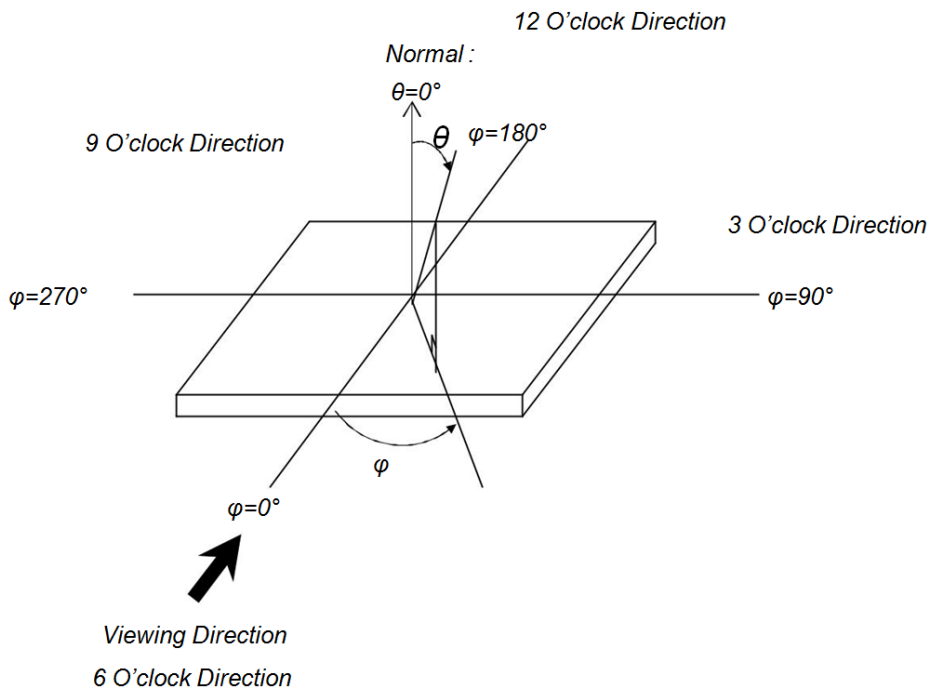

7.5 DEFINITION OF CONTRAST RATIO, CR

$$CR = \frac{\text{Brightness of Non-selected Segment (B2)}}{\text{Brightness of Selected Segment (B1)}}$$

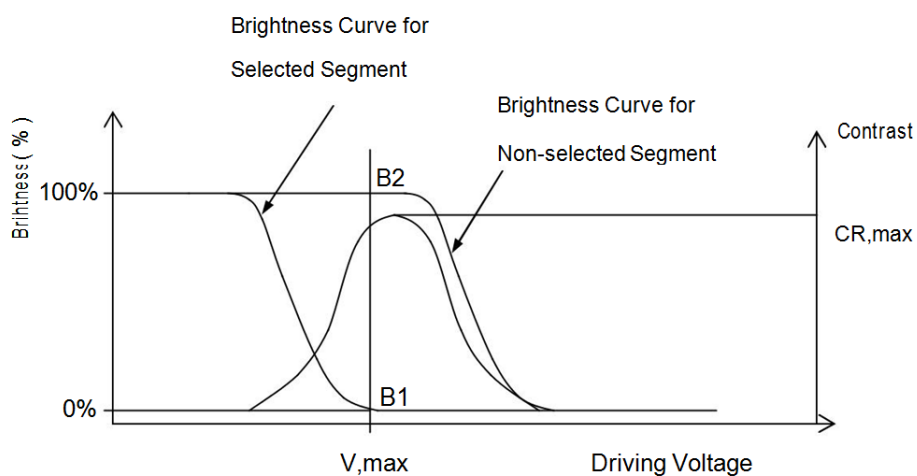

Product Specification

8. INSPECTION CRITERIA


8.1.1 Environmental conditions

*The environmental conditions for inspection shall be as follows Room temperature: $20 \pm 3^{\circ}\text{C}$
Humidity: $65 \pm 20\% \text{RH}$*

8.1.2 The external visual inspection


With a single 20-watt fluorescent lamp as the light source, the inspection was in the distance of 30cm or more from the LCD to the inspector's eyes .

8.2 LIGHT METHOD

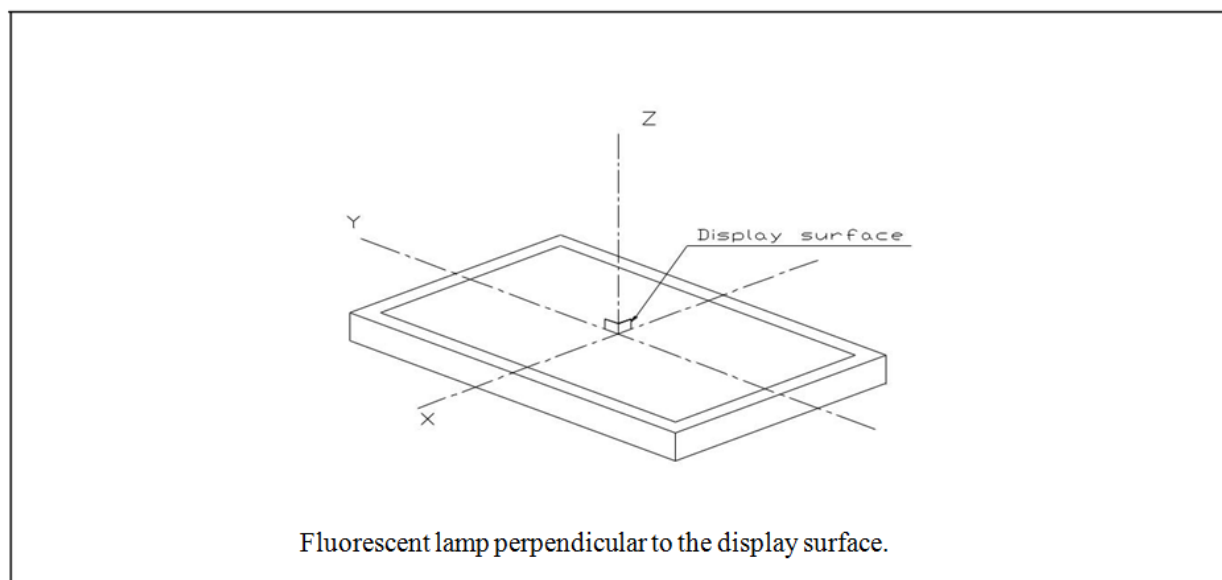

Product Specification

Inspection distance and angle

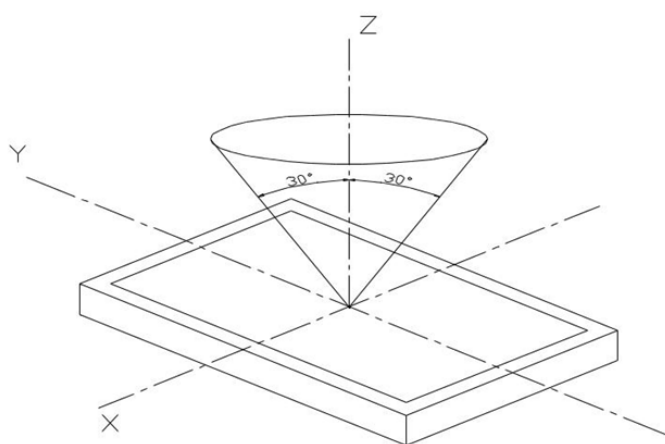

Inspection should be performed within angle ϕ (ϕ is usually 30°) from Z axis to each X and Y.
Inspection distance in any direction within ϕ must be kept 30 ± 5 cm from the display surface.

8.3 Classification of defects

8.3.1 Major defect

A major defect refers to a defect that may substantially degrade usability for product applications.

8.3.2 Minor defect

Product Specification

9. RELIABILITY

9.1 MTBF

The LCD module shall be designed to meet a minimum MTBF value of 50000 hours with normal. (25°C in the room without sunlight)

9.2 TESTS

NO.	Test Item	Test condition	Criterion
1	High Temperature Storage	80°C±2°C 96H Restore 2H at 25°C Power off	After testing, cosmetic and electrical defects should not happen.
2	Low Temperature Storage	-30°C±2°C 96H Restore 2H at 25°C Power off	
3	High Temperature Operation	70°C±2°C 96H Restore 2H at 25°C Power on	
4	Low Temperature Operation	-20°C±2°C 96H Restore 4H at 25°C Power on	
5	High Temperature & Humidity Operation	60°C±2°C 90%RH 96H Power on	
6	Temperature Cycle	--30°C ↔ 25°C ↔ 80°C 30min 5min 30min after 10cycle, Restore 2H at 25°C Power off	
7	Vibration Test	10Hz~150Hz, 100m/s ² , 120min	
8	Shock Test	Half-sinewave, 300m/s ² , 11ms	
9	Drop Test(package state)	800mm, concrete floor, 1corner, 3edges, 6 sides each time	1. After testing, cosmetic and electrical defects should not happen. 2. the product should remain at initial place 3. Product uncovered or package broken is not permitted.

Product Specification

10. PRECAUTIONS FOR USING LCD MODULE**10.1 handing precautions**

- (1) *The display panel is made of glass. Do not subject it to a mechanical shock or impact by dropping it.*
- (2) *If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.*
- (3) *Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.*
- (4) *The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.*
- (5) *If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten a cloth with one of the following solvents:*
 - *Isopropyl alcohol*
 - *Ethyl alcohol*
- (6) *Solvents other than those above mentioned may damage the polarizer. Especially, do not use the following:*
 - *Water*
 - *Ketone*
 - *Aromatic solvents*
- (7) *Extra care to minimize corrosion of the electrode. Water droplets, moisture condensation or a current flow in a high-humidity environment accelerates corrosion of the electrode.*
- (8) *Install the LCD Module by using the mounting holes. When mounting the LCD Module, make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.*
- (9) *Do not attempt to disassemble or process the LCD Module.*
- (10) *NC terminal should be open. Do not connect anything.*
- (11) *If the logic circuit power is off, do not apply the input signals.*
- (12) *To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.*
 - *Be sure to ground the body when handling the LCD Module.*
 - *Tools required for assembling, such as soldering irons, must be properly grounded.*
 - *To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.*
 - *The LCD Module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.*

Product Specification

10.2 STORAGE PRECAUTIONS

When storing The LCD Module, avoid exposure to direct sunlight of fluorescent lamps. Keep the modules in bags (avoid high temperature/ high humidity and low temperatures below 0 °C). Whenever possible, the LCD Module should be stored in the same conditions in which they were shipped from our company.

10.3 OTHERS

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.

If the LCD Module have been operating for a long time showing the same display patterns the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be recovered by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.

To minimize the performance degradation of the LCD Module resulting from destruction caused by static electricity etc. exercise care to avoid holding the following sections when handling the modules.

- Exposed area of the printed circuit board.
- Terminal electrode sections

Product Specification**11.0 USING LCD MODULES****11.1 LIQUID CRYSTAL DISPLAY MODULES**

LCD is composed of glass and polarizer. Pay attention to the following items when handling.

- (1) Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.
- (2) Do not touch, push or rub the exposed polarizers with anything harder than a HB pencil lead (glass, tweezers, etc).
- (3) N-hexane is recommended for cleaning the adhesives used to attach front/rear polarizers and reflectors made of organic substances, which will be damaged by chemicals such as acetone, toluene, toluene, ethanol and isopropyl alcohol.
- (4) When the display surface becomes dusty, wipe gently with absorbent cotton or other soft material like chamois soaked in petroleum ether. Do not scrub hard to avoid damaging the display surface.
- (5) Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading.
- (6) Avoid contacting oil and fats.
- (7) Condensation on the surface and contact with terminals due to cold will damage, stain or polarizers. After products are tested at low temperature they must be warmed up in a container before coming is contacting with room temperature air.
- (8) Do not put or attach anything on the display area to avoid leaving marks on.
- (9) Do not touch the display with bare hands. This will stain the display area and degrade insulation between terminals (some cosmetics are determinate to the polarizers).
- (10) As glass is fragile, it tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring.

11.2 INSTALLING LCD MODULE

Attend to the following items when installing the LCM.

- (1) Cover the surface with a transparent protective plate to protect the polarizer and LC cell.
- (2) When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual

Product Specification

11.3 ELECTRO-STATIC DISCHARGE CONTROL

Since this module uses a CMOS LSI, the same careful attention should be paid for electrostatic discharge as for an ordinary CMOS IC.

- (1) Make certain that you are grounded when handling LCM.
- (2) Before removing LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential.
- (3) When soldering the terminal of LCM, make certain the AC power source for the soldering iron does not leak.
- (4) When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
- (5) As far as possible, make the electric potential of your work clothes and that of the workbenches to the ground potential.
- (6) To reduce the generation of static electricity, be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended.

11.4 PRECAUTION FOR SOLDERING TO THE LCM

- (1) Observe the following when soldering lead wire, connector cable and etc. to the LCM.

-Soldering iron temperature: $280 \pm 10^{\circ}\text{C}$.

-Soldering time: 3-4 sec. -

Solder: eutectic solder.

If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.

- (2) When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.
- (3) When removing the electroluminescent panel from the PC board, be sure the solder has completely melted, otherwise the soldered pad on the PC board could be damaged.

Product Specification

11.5 PRECAUTIONS FOR OPERATION

- (1) Viewing angle varies with the change of liquid crystal driving voltage (V_o). Adjust V_o to show the best contrast.
- (2) Driving the LCD in the voltage above the limit will shorten its lifetime.
- (3) Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
- (4) If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then on.
- (5) Condensation on terminals can cause an electrochemical reaction disrupting the terminal circuit. Therefore, it must be used under the relative condition of 40°C, 50% RH.
- (6) When turning the power on, input each signal after the positive/negative voltage becomes stable.

11.6 STORAGE

When storing LCDS as spares for some years, the following precaution are necessary.

- (1) Store them in a sealed polyethylene bag. If properly sealed, there is no need for desiccant.
- (2) Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C.
- (3) The polarizer surface should not come in contact with any other objects. (We advise you to store them in the container in which they were shipped.)
- (4) Environmental conditions:
 - Do not leave them for more than 168hrs. at 60 °C. -
 - Should not be left for more than 48hrs. at -20 °C.

11.7 SAFETY

- (1) It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.

Product Specification

11.8 LIMITED WARRANTY

Unless agreed between B&H KOREA and customer, B&H KOREA will replace any of its LCD and modules which are found to be functionally defective when inspected in accordance with FRIDAGIANTPLUSLCD LCD acceptance standards (copies available upon request) for a period of one year from date of shipments.

11.9. RETURN LCM UNDER WARRANTY

No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are:

-Broken LCD glass.

-PCB eyelet's damaged or modified. -PCB conductors damaged.

-Circuit modified in any way, including addition of components. -PCB tampered with by grinding, engraving or painting varnish. -Soldering to or modifying the bezel in any manner.

Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB eyelet's conductors and terminal