


1N645UR-1

FEATURES

- 1N645UR-1 AVAILABLE IN JAN, JANTX, AND JANTXV PER MIL-PRF-19500/240
- SILICON RECTIFIER
- METALLURGICALLY BONDED
- HERMETICALLY SEALED
- DOUBLE PLUG CONSTRUCTION
- ALSO AVAILABLE AS LL645, CDLL645, & MLL645

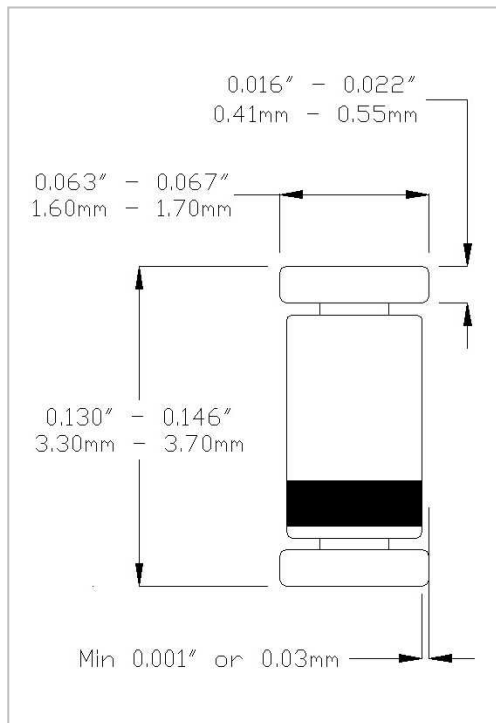

DESIGN DATA

Case: Hermetically sealed glass package per MIL-PRF-19500/240 DO-213AA outline

Lead Material: Copper clad steel

Lead Finish: Tin/Lead

Thermal Resistance ($R_{\theta JC}$): 100°C/W maximum

Thermal Impedance ($Z_{\theta JX}$): 35°C/W maximum

Marking: Blue body coat

Polarity: Cathode end is banded

MAXIMUM RATINGS AT 25 °C

Operating Temperature:	-65°C to +175°C
Storage Temperature:	-65°C to +175°C
Surge Current A, sine 8.3ms:	5.0A
Total Power Dissipation:	500mW
Operating Current:	400mA, $T_A = +25^\circ\text{C}$
Operating Current:	150mA, $T_A = +150^\circ\text{C}$
Derating Factor:	2mA/°C above +25°C
Derating Factor:	6mA/°C above +150°C
D.C. Reverse Voltage (VRWM):	225V

DC ELECTRICAL CHARACTERISTICS

V_F				I_R			
Ambient (°C)	I_F mA	Min V	Max V	Ambient (°C)	V_R V (dc)	Min μA	Max μA
25	400	0.80	1.00	25	225	-	0.050
150	400	0.70	0.95	25	270(ac)	-	50
-55	400	-	1.20	150	225	-	25

AC ELECTRICAL CHARACTERISTICS AT 25°C

	Symbol	Min	Max
Capacitance @ $V_R = 4\text{V}$	pF	-	20



WWW.MICROSEMI.COM

IRELAND - GORT ROAD, ENNIS, CO. CLARE

PHONE: +353 65 6840044
TOLL FREE: +186 62 702434
FAX: +353 65 6822298

U.S.A. DOMESTIC SALES CONTACT

PHONE: (617) 926 0404
TOLL FREE: 1 800 666 2999

t4U.com