Non-isolated Buck Offline LED Driver

Description

BP9926C is a high precision Buck constant current LED driver. The device operates in critical conduction mode and is suitable for 85Vac~265Vac universal input offline LED lighting.

The BP9926C integrates a 500V power MOSFET. With patent pending MOSFET driving technique, the operating current of the IC is as low as 130uA. It doesn't need the auxiliary winding for VCC supply. It can achieve excellent constant current performance with very few external components, so the system cost and size are minimized.

BP9926C utilizes patent pending current control method. It can achieve precise output current and excellent line regulation. The driver operates in critical conduction mode, the output current does not change with the inductance and output voltage.

The BP9926C offers rich protections to improve the system reliability, including LED open circuit protection, LED short circuit protection, VCC under voltage protection and thermal regulation function.

Features

- Internal 500V Power MOSFET
- Integrated HV JFET for VCC Power Supply
- Critical Conduction Mode Operation
- Low Operating Current
- ±5% LED Output Current Accuracy
- LED Open Protection
- LED Short Protection
- VCC Under Voltage Protection
- Thermal Regulation Function
- Available in S0P8 Package

Applications

- LED Candle
- LED Bulb
- Other LED Lighting

Typical Application

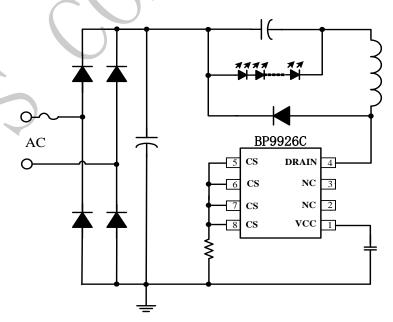


Figure 1. Typical application circuit for BP9926C



BP9926C

Non-isolated Buck Offline LED Driver

Ordering Information

Part Number	Package	Operating Temperature	Packing Method	Marking
BP9926C S0	CODO	-40 °C to 105 °C	Tape	BP9926C
	SOP8		4,000 Pcs/Reel	XXXXXY XYY

Pin Configuration and Marking Information

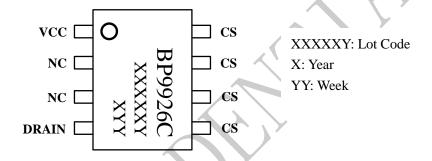


Figure 2. Pin configuration

Pin Definition

Pin No.	Name	Description	
1	VCC	Power Supply Pin.	
2, 3	NC	No Connection	
4	DRAIN	DRAIN Internal HV Power MOSFET Drain.	
5, 6, 7, 8	CS	IC GND Pin, also for Current Sense. Connect a sense resistor between	
		this pin and power GND.	