


SELECTION GUIDE FOR AM / FM RADIO TRANSISTOR KIT



TYPE	POLARITY	APPLICATIONS	CASE
CL 9011	NPN	AM / FM IF , AM CONVERTER	T0-92B 
CL 9012	PNP	AUDIO POWER OUTPUT	
CL 9013	NPN	AUDIO POWER OUTPUT	
CL 9014	NPN	AUDIO DRIVER	
CL 9015	PNP	AUDIO DRIVER	
CL 9016	NPN	FM RF	
CL 9018	NPN	AM / FM IF , FM CONVERTER	

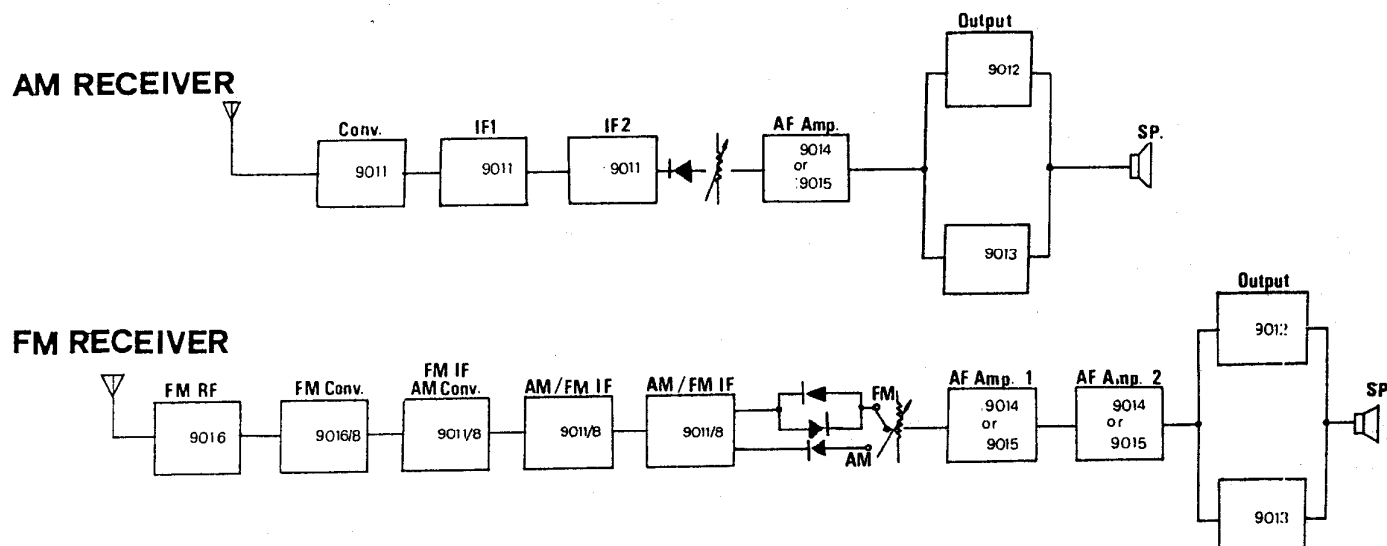

MICRO ELECTRONICS LTD.

美科有限公司

7/F, Enterprise Square Three, 39 Wang Chiu Road, Kowloon Bay, Kowloon, Hong Kong.

TEL: (852) 23430181 FAX: (852) 23410321

HOME PAGE: <http://www.microelectr.com.hk>

DEVICE SPECIFICATIONS [$T_A = 25^\circ\text{C}$ unless otherwise specified]

TYPE	MAXIMUM RATINGS				ELECTRICAL CHARACTERISTICS																				
	V_{CB0} (V)	V_{CE0} (V)	V_{EB0} (V)	P_D (mW)	H_{FE}		I_{CB0} (mA)	V_{CB} (V)	V_{BE} (V)		$V_{CE(sat)}$ (V)		I_C (mA)		I_B (mA)		f_T (MHz)		C_{ob} (pF)		V_{CB} (V)	C_{cbb} (pSec)	NF (dB)		
					min	max	max		typ	max	typ	max	typ	max	min	typ	max	typ	max	typ					
CL 9011	25	20	3	300	28	198	50	18	0.67	0.85	1	5	0.08	0.5	10	1	150	220	1	5	19	25	10	22	3 ^{2/}
CL 9012	25	20	5	500	64	350	500	18	0.7	0.85	10	1	0.2	0.6	250	25									
CL 9013	25	20	5	500	64	350	500	18	0.7	0.85	10	1	0.2	0.6	250	25									
CL 9014	25	20	5	500	60	1000	50	18	0.63	0.85	1	5	0.07	0.5	10	1	50	140	1	5	27	6	10		2 ^{3/}
CL 9015	25	20	5	500	60	1000	50	18	0.64	0.85	1	5	0.07	0.5	10	1	50	120	1	5	35	6	10		2 ^{3/}
CL 9016	25	20	3	300	28	198	50	18	0.72	0.85	1	5	0.14	0.5	10	1	500	800	5	5	11	16	10		3 ^{4/}
CL 9018	20	15	3	300	28	198	50	18	0.72	0.85	1	5	0.14	0.5	10	1	400	800	5	5	13	17	10		18

- $1/ : C_{cbb} @ I_C = 1\text{mA} \quad V_{CE} = 5\text{V} \quad f = 31.8\text{MHz}$
 $2/ : NF @ I_C = 1\text{mA} \quad V_{CE} = 5\text{V} \quad R_G = 500\Omega \quad f = 1\text{MHz}$
 $3/ : NF @ I_C = 0.1\text{mA} \quad V_{CE} = 5\text{V} \quad R_G = 10k\Omega \quad f = 30\text{Hz to } 15\text{kHz}$
 $4/ : NF @ I_C = 1\text{mA} \quad V_{CE} = 5\text{V} \quad R_G = 50\Omega \quad f = 100\text{MHz}$

CLASSIFICATION OF HFE GROUPS

GROUP	A	B	C	D	E	F	G	H	I	@ I_C / V_{CE}
CL 9011 CL 9016 CL 9018				28 - 45	39 - 60	54 - 80	72 - 108	97 - 146	132 - 198	1mA / 5V
CL 9014 CL 9015	60 - 150	100 - 300	200 - 600	400 - 1000						1mA / 5V
CL 9012 CL 9013				64 - 91	78 - 112	96 - 135	118 - 166	144 - 202	180 - 350	50mA / 1V