



CO339

Quad Comparator


The CO339 each consist of four comparators in a single package. The open collector output allows a wired OR connection.

These products feature a wide range of operating power supply voltages, from 3 to 36V with single power supply operation, and from ± 1.5 to ± 18 V with dual power supply operation. Available packages include 14-pin DIP and 14-pin SOP.

●Features

- 1) Wide range of operating voltages (single power supply: 3 to 36V; dual power supply: ± 1.5 to ± 18 V)
- 2) Low current dissipation (0.8mA typ., $V_{CC} = 5$ V)
- 3) Low input offset current (5nA typ., $V_{CC} = 5$ V) and input offset voltage (2mV typ., $V_{CC} = 5$ V)
- 4) Wide common-mode input voltage range (0 to $V_{CC} - 1.5$ V).
- 5) Open collector output.

●Block diagram and internal circuit configuration

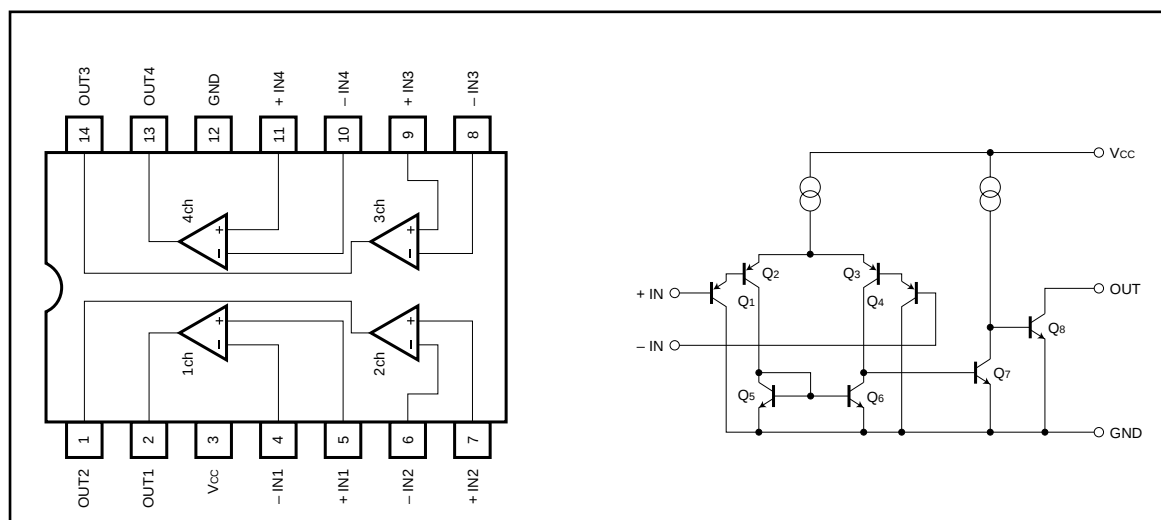

* All specs and applications shown above subject to change without prior notice.

Quad Comparator

● Absolute maximum rating (Ta = 25°C)

Parameter	Symbol	Limits		Unit
		CO339 (DIP-14)	CO339 (SOP-14)	
Power supply voltage	V _{CC}	36(±18)	36(±18)	V
Power dissipation	P _d	950*	450*	mW
Differential input voltage	V _{ID}	±V _{CC}	±V _{CC}	V
Common-mode input voltage	V _I	-0.3~V _{CC}	-0.3~V _{CC}	V
Operating temperature	T _{opr}	-40~+85	-40~+85	
Storage temperature	T _{stg}	-55~+125	-55~+125	

* Refer to the Pd characteristics diagram.

● Electrical characteristics (unless otherwise noted, Ta = 25°C, V_{CC} = +5V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input offset voltage	V _{IO}	—	2	5	mV	V _O = 1.4V
Input offset current	I _{IO}	—	5	50	nA	I _{IN⁺} - I _{IN⁻} , V _O = 1.4V
Input bias current	I _B	—	25	250	nA	V _O = 1.4V
Common-mode input voltage	V _{ICM}	0	—	V _{CC} - 1.5	V	—
Voltage gain	A _v	—	106	—	dB	R _L = 15kΩ
Quiescent current	I _Q	—	0.8	2	mA	R _L = ∞, on All Comparators
Output sink current	I _{sink}	6	16	—	mA	V _{IN⁻} = 1V, V _{IN⁺} = 0V, V _O = 1.5V
Output saturation voltage	V _{OL}	—	250	400	mV	V _{IN⁻} = 1V, V _{IN⁺} = 0V, I _{sink} = 3mA
Output leakage current	I _{leak}	—	0.1	—	nA	V _{IN⁺} = 1V, V _{IN⁻} = 0V, V _O = 5V
Response time	t _r	—	1.3	—	μs	R _L = 5.1kΩ, V _{RL} = 5V

● ORDERING INFORMATION

CO339 X
 └─ BLANK: SO-14
 N: DIP14
 A: SO-14 & TAPING

* All specs and applications shown above subject to change without prior notice.

Quad Comparator

●Electrical characteristic curves

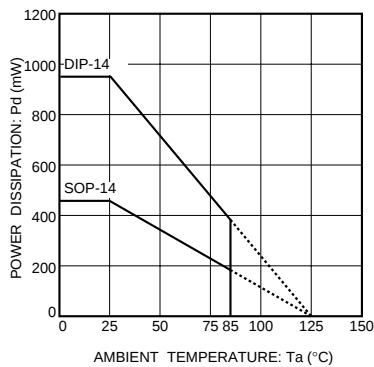


Fig. 1 Power dissipation vs. ambient temperature

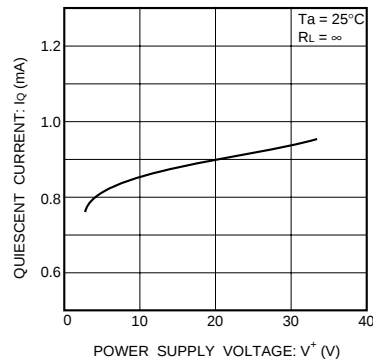


Fig. 2 Quiescent current vs. power supply voltage

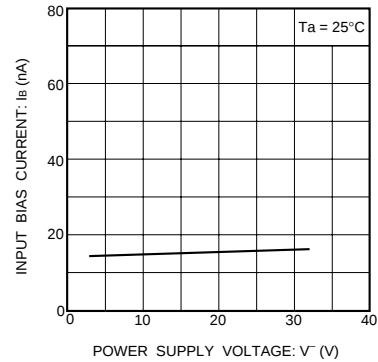


Fig. 3 Input bias current vs. power supply voltage

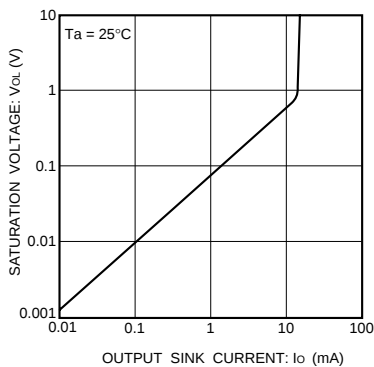


Fig. 4 Output saturation voltage vs. output current

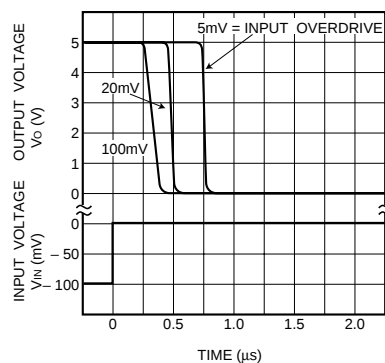


Fig. 5 Propagation characteristics (I)

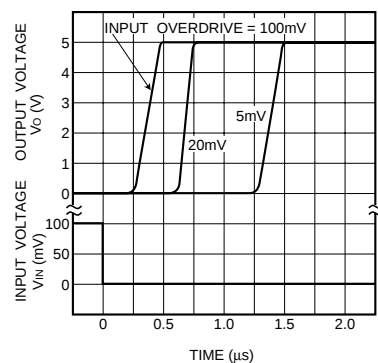


Fig. 6 Propagation characteristics (II)

* All specs and applications shown above subject to change without prior notice.

Quad Comparator

● Operation notes

(1) Handling unused circuits

If there are any circuits which are not being used, we recommend making connections as shown in Figure 7, with the input going to the potential within the in-phase input voltage range (V_{ICM}), and the output being open.


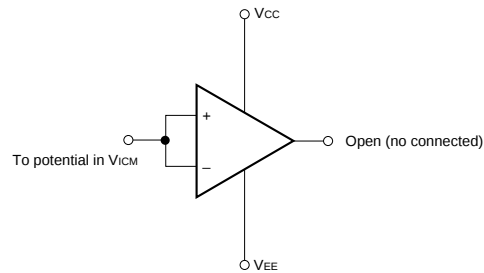


Fig. 7 Unused circuit connections

● External dimensions (Units: mm)

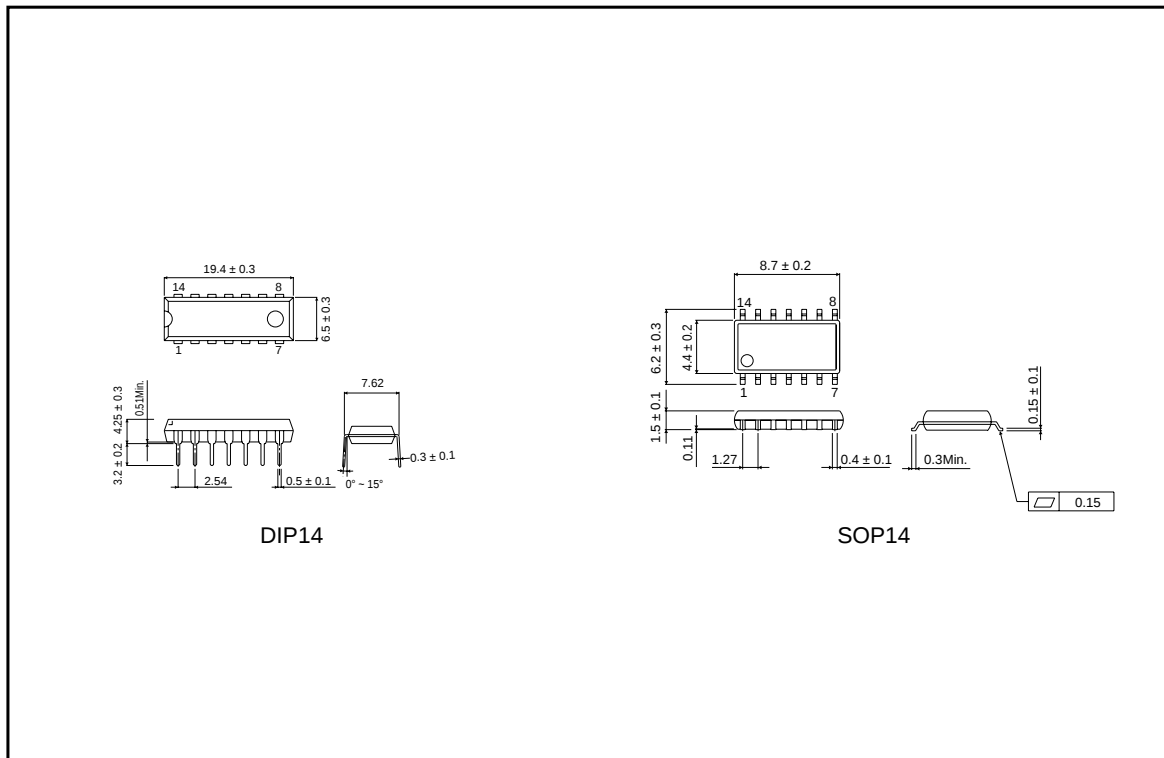

* All specs and applications shown above subject to change without prior notice.