# Stepper Motor Driver with Divide by Select

The CS8441 is a Stepper Motor Driver that implements an H–Bridge design in order to drive two coils in an eight step sequence per revolution in the divide by 1 mode; 16 step sequence in the divide by 2 mode. The H–Bridge is capable of delivering 85 mA to the load.

The sequencer insures that the odometer is monotonic. This sequencer is configured such that simultaneous conduction does not occur. Before each successive output sequence the part is taken through a state where both outputs are turned off individually. This tends to minimize the inductive kick back energy that the part must absorb. On—chip clamp diodes are across each output to protect the part from the kick back energy that it must absorb.

Additional part protection is provided by two functions. The first being "short circuit protection." This function will protect the part in the case of a shorted or partially shorted load. The second protection function is the "overvoltage function." This function monitors the level of the supply voltage. In transient conditions such as load dump, the part will shut down, protecting itself.

#### **Features**

- No Cross-Conduction in Either H-Bridge
- Divide by 1 and Divide by 2 Modes
- Guaranteed Monotonic
- On-Chip Flyback Diodes
- Fault Protection
  - Overvoltage
  - Load Dump Protection to 60 V

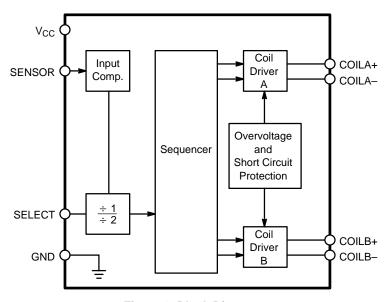


Figure 1. Block Diagram




### ON Semiconductor™

http://onsemi.com



DIP-8 N SUFFIX CASE 626

# PIN CONNECTIONS AND MARKING DIAGRAM



A = Assembly Location

WL, L = Wafer Lot YY, Y = Year WW, W = Work Week

#### ORDERING INFORMATION

| Device    | Package | Shipping      |
|-----------|---------|---------------|
| CS8441YN8 | DIP-8   | 50 Units/Rail |

#### **CS8441**

#### **ABSOLUTE MAXIMUM RATINGS\***

| Rat   | Value   | Unit                          |    |
|---|---|-------------------------------|----|
| Supply Voltage (V <sub>CC</sub> ) (Note 1.):  | Continuous<br>100 ms Pulse Transient              | -0.5 to 24<br>-0.5 to 60      | V  |
| Input Voltage (V <sub>IN</sub> )              |   | -0.3 to V <sub>CC</sub> + 0.3 | V  |
| Storage Temperature Range (T <sub>STG</sub> ) |   | -65 to 150                    | °C |
| Junction Temperature Range                    |   | -40 to 150                    | °C |
| ESD (Human Body Model)                        |   | 2.0                           | kV |
| Lead Temperature Soldering:                   | Wave Solder: (through hole styles only) (Note 2.) | 260 peak                      | °C |

<sup>1. -40°</sup>C to +125°C.

**ELECTRICAL CHARACTERISTICS**  $(-40^{\circ}C \le T_{A} \le 125^{\circ}C, 6.5 \text{ V} \le V_{CC} \le 15.5 \text{ V}; unless otherwise stated. All voltage shall be referenced to GND unless otherwise noted. Overvoltage shutdown of coils occurs when <math>V_{CC} > 16 \text{ V}.)$ 

| Characteristic  | Test Conditions   | Min   | Тур  | Max                    | Unit   |
|---|---|---|--|------------------------|--|
| Supply, V <sub>CC</sub>                                       |   | •   | •  |                        |  |
| Supply Voltage Range  | $\begin{array}{l} -40^{\circ}C \leq T_{A} \leq 125^{\circ}C \\ -40^{\circ}C \leq T_{A} \leq 25^{\circ}C \\ Transient Pulse, 100 ms \end{array}$   | 6.5<br>6.5<br>–   | -<br>-<br>-  | 15.5<br>24<br>35       | V <sub>DC</sub><br>V <sub>DC</sub><br>V <sub>DC</sub>                    |
| Supply Current  | $V_{CC}$ = 15.5 $V_{DC}$ , Outputs not loaded.  | -   | 24   | 35                     | mA   |
| Overvoltage Shutdown  | -   | 16  | -  | 23                     | V  |
| Speed Sensor Input, SENSOR                                    |   |   |  |                        |  |
| Input Frequency Range   | -   | -   | 0.2  | 1.0                    | kHz  |
| Switching Threshold   | -   | 1.2   | -  | 2.4                    | $V_{DC}$   |
| Hysteresis  | -   | 300   | 500  | -                      | $mV_{DC}$  |
| Input Bias Current  | $0.8 \text{ V}_{DC} \le \text{V}_{IN} \le \text{V}_{CC}$  | -   | 0.1  | ±1.0                   | μΑ   |
| Input Voltage Range   | -   | 0   | -  | V <sub>CC</sub>        | $V_{DC}$   |
| Operating Input Voltage                                       | 10 kΩ Resistor in Series  | -   | -  | -15 to V <sub>CC</sub> | $V_{DC}$   |
| Input Clamp Current   | I Clamp at V <sub>IN</sub> = 0 V <sub>DC</sub>  | -   | -0.4   | -5.0                   | mA   |
| Divider Select Input, SELECT                                  |   |   |  |                        |  |
| Logic 0 Input Voltage   | -   | -   | -  | 100                    | $mV_{DC}$  |
| Logic 1 Input Voltage   | -   | 3.0   | -  | V <sub>CC</sub>        | $V_{DC}$   |
| Logic 0 Input Current   | 0 V ≤ V <sub>IN</sub> ≤ 100 mV  | -   | -1.0   | -100                   | μА   |
| Logic 1 Input Current   | $3.0 \text{ V} \le \text{V}_{\text{IN}} \le 15.5 \text{ V}_{\text{DC}}$   | -   | 0.75   | 2.0                    | mA   |
| Coil Output Drivers   |   |   |  |                        |  |
| Coil Load   | +25°C   | 198   | 210  | 222                    | Ω  |
| Coil Inductance   | -   |   | 80   | _                      | mH   |
| Coil Resistance Temperature                                   | Coefficient   | -   | -  | 0.35                   | %/°C   |
| Energized Coil Voltage (Note 3.)<br>(Both Polarities) A and B | $\begin{split} &V_{CC} = 6.5 \ V_{DC} \\ &V_{CC} = 10 \ V_{DC} \\ &V_{CC} = 15.5 \ V_{DC}, -20^{\circ}C \le T_{A} \le 125^{\circ}C \\ &V_{CC} = 15.5 \ V_{DC}, -40^{\circ}C \le T_{A} \le -20^{\circ}C \end{split}$ | V <sub>CC</sub> - 1.5 V<br>V <sub>CC</sub> - 1.6 V<br>V <sub>CC</sub> - 1.75 V<br>V <sub>CC</sub> - 2.0 V | V <sub>CC</sub> - 0.9 V<br>V <sub>CC</sub> - 1.0 V<br>V <sub>CC</sub> - 1.1 V<br>V <sub>CC</sub> - 1.2 V | -<br>-<br>-<br>-       | V <sub>DC</sub><br>V <sub>DC</sub><br>V <sub>DC</sub><br>V <sub>DC</sub> |
| De-energized Coil Leakage Current                             | -   | -   | _  | ±100                   | μΑ   |

<sup>3.</sup> Voltage across the coils shall be measured at the specific voltages, but shall also be within linearly interpolated limits.

<sup>2. 10</sup> second maximum.

<sup>\*</sup>The maximum package power dissipation must be observed.

**ELECTRICAL CHARACTERISTICS (continued)** ( $-40^{\circ}\text{C} \le T_{A} \le 125^{\circ}\text{C}$ , 6.5 V  $\le V_{CC} \le 15.5$  V; unless otherwise stated. All voltage shall be referenced to GND unless otherwise noted. Overvoltage shutdown of coils occurs when  $V_{CC} > 16$  V.)

| Characteristic                                 | Test Conditions | Min | Тур | Max | Unit |
|--|-----------------|-----|-----|-----|------|
| Short Circuit Protection                       |                 |     |     |     |      |
| Short Circuit Threshold<br>I Coil A + I Coil B | -               | -   | 275 | 400 | mA   |
| Short Circuit Turn-Off Delay                   | -               | -   | 5.0 | _   | μs   |

#### PACKAGE PIN DESCRIPTION

| PACKAGE PIN # |                 |   |  |
|---------------|-----------------|---|--|
| DIP-8         | PIN SYMBOL      | FUNCTION  |  |
| 1             | GND             | Ground connection.  |  |
| 2             | COILA+          | Output stage, when active, this pin supplies current to COIL A. |  |
| 3             | COILA-          | Output stage, when active, this pin supplies current to COIL A. |  |
| 4             | SENSOR          | Input signal from wheel speed or engine rpm.                    |  |
| 5             | SELECT          | Selects divide by 1 or divide by 2 mode.                        |  |
| 6             | COILB-          | Output stage, when active, this pin supplies current to COIL B. |  |
| 7             | COILB+          | Output stage, when active, this pin supplies current to COIL B. |  |
| 8             | V <sub>CC</sub> | Supply voltage.   |  |

#### **CIRCUIT OPERATION**

#### **SPEED SENSOR INPUT**

SENSOR is a PNP comparator input which accepts a sine wave or a square wave input. This input is protected from excursions above  $V_{CC}$  as well as any below ground, as long as the current is limited to 1.5 mA. It has an active clamp set to zero volts to prevent negative input voltages from disrupting normal operation. The sensor input can withstand 150  $V_{DC}$  as long as the input current is limited to 1.5 mA max. using a series resistor of  $100\ k\Omega$ 

#### **COIL DRIVER OUTPUTS**

Simultaneously energizing the source and sink on either leg is not permitted, i.e. Q1 & Q2 or Q3 & Q4 cannot be energized simultaneously.

Circuit function is not affected by inductive transients due to coil loads as specified in the Transition States section.

The transition states occur as indicated in Table 1 without any intermediate states permitted.

**Table 1. Transition States** 

| State | Coil A | Coil B |
|-------|--------|--------|
| 0     | +      | +      |
| 1     | OFF    | +      |
| 2     | -      | +      |
| 3     | -      | OFF    |
| 4     | -      | _      |
| 5     | OFF    | _      |
| 6     | +      | -      |
| 7     | +      | OFF    |

The polarity definition for the coil driver outputs is as follows:

| Polarity     | Connect Coil +  | Connect Coil -  |
|--------------|-----------------|-----------------|
| Positive (+) | V <sub>CC</sub> | GND             |
| Negative (-) | GND             | V <sub>CC</sub> |

#### **DIVIDER SELECT INPUT**

The speed sensor input frequency is divided by one or divided by two by connecting the divider select input, (Pin 5) as follows:

Logic 0 = divide by 2. Logic 1 = divide by 1.

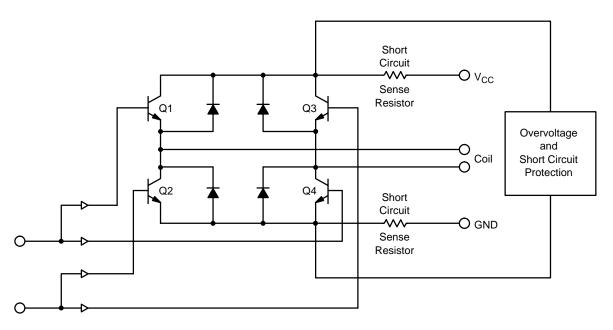


Figure 2. Coil Driver Output

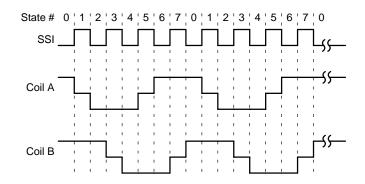


Figure 3. Divide by 1 (8 Step Mode), SELECT = 1

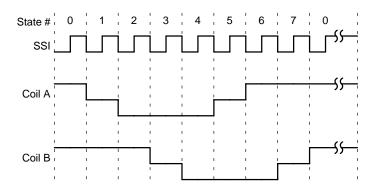


Figure 4. Divide by 2 (16 Step Mode), SELECT = 0


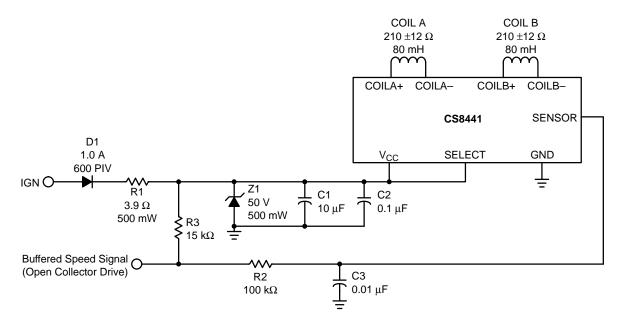


Figure 5. Odometer Application Diagram

#### **PACKAGE DIMENSIONS**

#### DIP-8 **N SUFFIX** CASE 626-05 ISSUE L

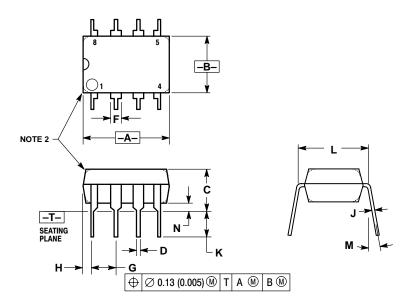

- NOTES:
  1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
  2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
  3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

|     | MILLIMETERS |       | INC       | HES   |
|-----|-------------|-------|-----------|-------|
| DIM | MIN         | MAX   | MIN       | MAX   |
| Α   | 9.40        | 10.16 | 0.370     | 0.400 |
| В   | 6.10        | 6.60  | 0.240     | 0.260 |
| С   | 3.94        | 4.45  | 0.155     | 0.175 |
| D   | 0.38        | 0.51  | 0.015     | 0.020 |
| F   | 1.02        | 1.78  | 0.040     | 0.070 |
| G   | 2.54        | BSC   | 0.100 BSC |       |
| Н   | 0.76        | 1.27  | 0.030     | 0.050 |
| J   | 0.20        | 0.30  | 0.008     | 0.012 |
| K   | 2.92        | 3.43  | 0.115     | 0.135 |
| L   | 7.62 BSC    |       | 0.300     | BSC   |
| M   |             | 10°   |           | 10°   |
| N   | 0.76        | 1.01  | 0.030     | 0.040 |

#### **PACKAGE THERMAL DATA**

| Parameter        |         | DIP-8 | Unit |
|------------------|---------|-------|------|
| R <sub>⊖JC</sub> | Typical | 52    | °C/W |
| $R_{\Theta JA}$  | Typical | 100   | °C/W |

## **Notes**

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

#### **PUBLICATION ORDERING INFORMATION**

#### NORTH AMERICA Literature Fulfillment:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

**Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada **Fax**: 303–675–2176 or 800–344–3867 Toll Free USA/Canada

Email: ONlit@hibbertco.com

Fax Response Line: 303-675-2167 or 800-344-3810 Toll Free USA/Canada

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

EUROPE: LDC for ON Semiconductor - European Support

German Phone: (+1) 303–308–7140 (Mon–Fri 2:30pm to 7:00pm CET)

Email: ONlit-german@hibbertco.com

French Phone: (+1) 303–308–7141 (Mon–Fri 2:00pm to 7:00pm CET)

Email: ONlit-french@hibbertco.com

English Phone: (+1) 303–308–7142 (Mon–Fri 12:00pm to 5:00pm GMT)

Email: ONlit@hibbertco.com

EUROPEAN TOLL-FREE ACCESS\*: 00-800-4422-3781

\*Available from Germany, France, Italy, UK, Ireland

#### CENTRAL/SOUTH AMERICA:

Spanish Phone: 303-308-7143 (Mon-Fri 8:00am to 5:00pm MST)

Email: ONlit-spanish@hibbertco.com

ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support

Phone: 303-675-2121 (Tue-Fri 9:00am to 1:00pm, Hong Kong Time)

Toll Free from Hong Kong & Singapore: 001–800–4422–3781

Email: ONlit-asia@hibbertco.com

JAPAN: ON Semiconductor, Japan Customer Focus Center 4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031

Phone: 81–3–5740–2745 Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local Sales Representative.