

2.45 GHz Balun/Filter Combination**P/N 2450FB39A0150**

Detail Specification: 01/06/09

Page 1 of 2


General Specifications

Part Number	2450FB39A0150
Frequency (MHz)	2400 - 2500
Unbalanced Impedance	50 Ω
Balanced Impedance	150 Ω
Insertion Loss	2.5 dB max.
Return Loss	9.5 dB min.
Phase Difference	180° $\pm$ 10
Amplitude Difference	1.0 dB max.


Attenuation (dB)	35 min.@ 880~960MHz
	30 min.@ 1710~1910 MHz
	30 min.@ 4800~5000MHz
	25 min.@ 7200~7500MHz
Reel Quantity	3000
Power Capacity	1 watt max.
Operating Temperature	-40 to +85°C
Storage Temperature	+5 ~ +35°C, Humidity 45~75%RH, 12 mos. Max

Mechanical Dimensions



	In	mm
L	0.098 $\pm$ 0.008	2.50 $\pm$ 0.20
W	0.079 $\pm$ 0.008	2.00 $\pm$ 0.20
T	0.043 $\pm$ 0.004	1.10 $\pm$ 0.10
a	0.016 $\pm$ 0.004	0.40 $\pm$ 0.10
b	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
c	0.012 $\pm$ 0.004/-0.008	0.30 $\pm$ 0.1/-0.2
e	0.039 $\pm$ 0.004	1.00 $\pm$ 0.10
g	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
p	0.028 $\pm$ 0.004	0.70 $\pm$ 0.10

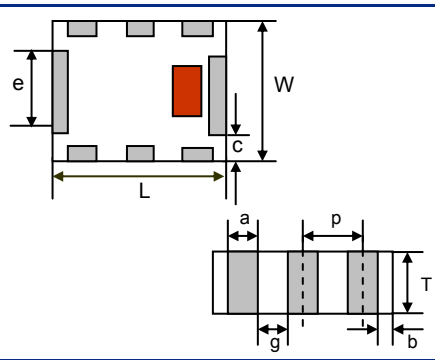**Terminal Configuration**

No.	Function
1	NC
2	Unbalanced Port
3	NC or DC Feed
4	Balanced Port
5	NC
6	Balanced Port
7	GND
8	GND

**Mounting Considerations**

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

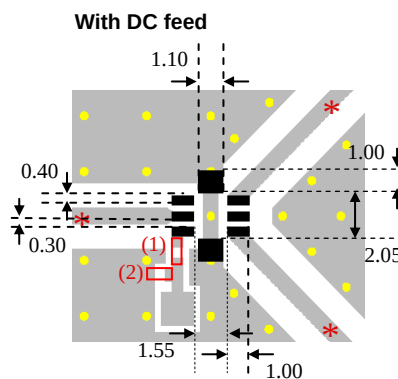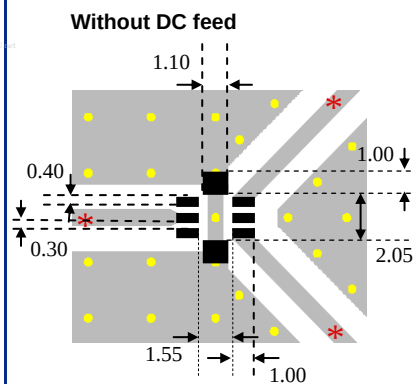

Units: mm

- Solder Resist
- Land
- Through-hole (ϕ 0.3)
- (1) Choke Inductor = 8.2nH
- (2) Decoupling Capacitor = 100pF

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

Preliminary

"High Frequency Ceramic Solutions"



2.45 GHz Balun/Filter Combination

P/N 2450FB39A0150

Detail Specification: 01/06/09

Page 2 of 2

Typical Electrical Performance (T=25°C)

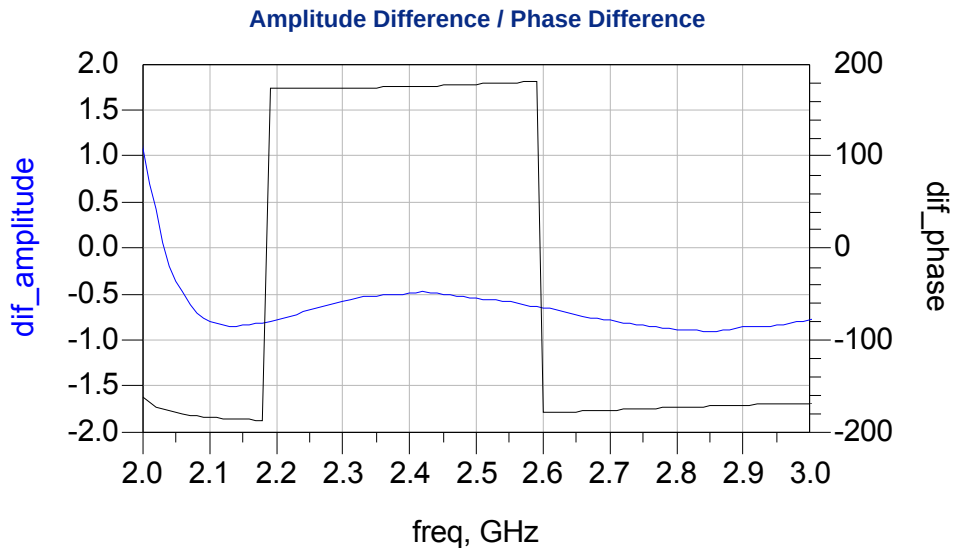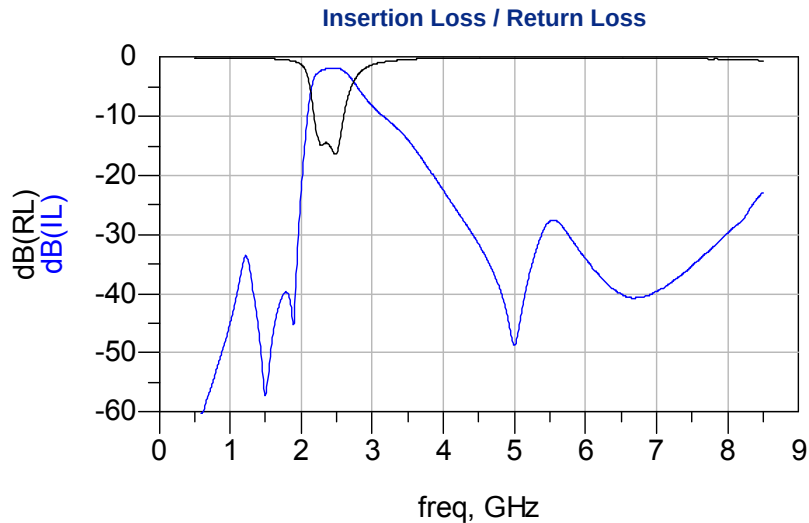

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved