

FEATURES

- 9.20-10.0GHz Bandwidth
- Input/Output Impedance Matched to 50 Ohms
- +39.0 dBm Output Power at 1dB Compression
- 7.5 dB Power Gain at 1dB Compression
- 30% Power Added Efficiency
- -46 dBc IM3 at PO = 28dBm SCL
- Hermetic Metal Flange Package
- 100% Tested for DC, RF, and R_{TH}



ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)



Caution! ESD sensitive device.

SYMBOL	PARAMETERS/TEST CONDITIONS ¹	MIN	TYP	MAX	UNITS
P_{1dB}	Output Power at 1dB Compression $f = 9.20-10.0\text{GHz}$ $V_{DS} = 10\text{ V}, I_{DSQ} \approx 2200\text{mA}$	38.5	39.0		dBm
G_{1dB}	Gain at 1dB Compression $f = 9.20-10.0\text{GHz}$ $V_{DS} = 10\text{ V}, I_{DSQ} \approx 2200\text{mA}$	6.5	7.5		dB
ΔG	Gain Flatness $f = 9.20-10.0\text{GHz}$ $V_{DS} = 10\text{ V}, I_{DSQ} \approx 2200\text{mA}$			± 0.6	dB
PAE	Power Added Efficiency at 1dB Compression $V_{DS} = 10\text{ V}, I_{DSQ} \approx 2200\text{mA}$ $f = 9.20-10.0\text{GHz}$		30		%
I_{d1dB}	Drain Current at 1dB Compression $f = 9.20-10.0\text{GHz}$		2300	2600	mA
IM3	Output 3rd Order Intermodulation Distortion $\Delta f = 10\text{ MHz}$ 2-Tone Test; Pout = 28dBm S.C.L. ² $V_{DS} = 10\text{ V}, I_{DSQ} \approx 65\% \text{ IDSS}$ $f = 10.0\text{GHz}$	-43	-46		dBc
I_{DSS}	Saturated Drain Current $V_{DS} = 3\text{ V}, V_{GS} = 0\text{ V}$		4000	5000	mA
V_P	Pinch-off Voltage $V_{DS} = 3\text{ V}, I_{DS} = 40\text{ mA}$		-2.5	-4.0	V
R_{TH}	Thermal Resistance ³		3.5	4.0	$^\circ\text{C/W}$

Note: 1. Tested with 100 Ohm gate resistor.
2. S.C.L. = Single Carrier Level.
3. Overall R_{th} depends on case mounting.

ABSOLUTE MAXIMUM RATING^{1,2}

SYMBOLS	PARAMETERS	ABSOLUTE ¹	CONTINUOUS ²
V_{ds}	Drain-Source Voltage	15V	10V
V_{gs}	Gate-Source Voltage	-5V	-4.5V
I_{gsf}	Forward Gate Current	96mA	28.8mA
I_{gsr}	Reverse Gate Current	-19.2mA	-4.8mA
P_{in}	Input Power	38.5dBm	@ 3dB Compression
T_{ch}	Channel Temperature	175 $^\circ\text{C}$	175 $^\circ\text{C}$
T_{stg}	Storage Temperature	-65 to +175 $^\circ\text{C}$	-65 to +175 $^\circ\text{C}$
P_t	Total Power Dissipation	38W	38W

Note: 1. Exceeding any of the above ratings may result in permanent damage.
2. Exceeding any of the above ratings may reduce MTTF below design goals.

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085

Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 1 of 2
Revised October 2007

EIC0910A-8


ISSUED DATE: 10/09/2007

9.20-10.00 GHz 8-Watt Internally Matched Power FET

PACKAGES OUTLINE


Dimensions in inches, Tolerance $\pm .005$ unless otherwise specified

EIC0910A-8 (Hermetic)

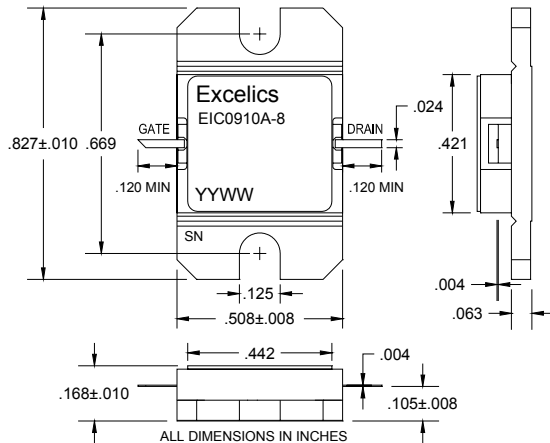

Caution! ESD sensitive device.

EIC0910A-8NH (Non-Hermetic)

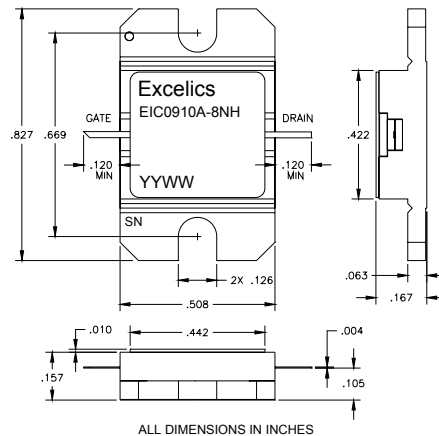

Caution! ESD sensitive device.

ORDERING INFORMATION

Part Number	Packages	Grade ¹	f _{Test} (GHz)	P _{1dB} (min)	IM ₃ (min) ²
EIC0910A-8	Hermetic	Industrial	9.20-10.00GHz	38.5	-43
EIC0910A-8NH	Non-Hermetic	Industrial	9.20-10.00GHz	38.5	-43

Notes: 1. Contact factory for military and hi-rel grades.
2. Exact test conditions are specified in "Electrical Characteristics" table.

DISCLAIMER

EXCELICS SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. EXCELICS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

EXCELICS SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF EXCELICS SEMICONDUCTOR, INC. AS HERE IN:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085

Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 2 of 2

Revised October 2007