

HFKT-L/HFKT-LT

AUTOMOTIVE RELAY



Typical Applications

Energy management, engine control, ignition, main switch/supply relay, preheating system, quiescent current management

Features

- Max. continuous current 50A
- Max. making current 200A
- Extended temp. range up to 125°C
- With highly established reliability
- Strong resistance ability to shock & vibration
- No change of switching state version at breakdown of battery voltage
- Reflow soldering version available
- RoHS & ELV compliant

CHARACTERISTICS

Contact arrangement	1A	Release time	Typ.: 1.5ms Max.: 5ms
Voltage drop (initial) ¹⁾	Typ.: 30mV (at 10A) Max.: 300mV (at 10A)	Ambient temperature	-40°C to 125°C
Max. continuous current ²⁾	50A (at 23°C) 40A (at 85°C) 30A (at 125°C)	Vibration resistance	30Hz to 440Hz, 196m/s ²
Max. switching current	Make: 200A ³⁾ Break: 40A (Resistive, 13.5VDC)	Shock resistance	294m/s ² , close time of NO contacts 100μs Max. 980m/s ² , release time of closed NO contacts 100μs Max.
Max. switching voltage	16VDC	Termination	PCB ⁵⁾
Min. contact load	1A 6VDC	Construction	Plastic sealed, Flux proofed
Electrical endurance	See "CONTACT DATA"	Unit weight	Approx. 11g
Mechanical endurance	2 x 10 ⁶ OPS	¹⁾ Initial value. ²⁾ To energize an impulse for 10ms to 100ms at coil terminals so that contacts switch. ³⁾ Inrush peak current under lamp load, at 13.5VDC. ⁴⁾ 1min, leakage current less than 1mA. ⁵⁾ Since it is an environmental friendly product, please select lead-free solder when welding. The recommended soldering temperature and time is (250±3)°C, (5±0.3)s.	
Initial insulation resistance	100MΩ (at 500VDC)		
Dielectric strength ⁴⁾	500VAC		
Operate time	Typ.: 1.5ms, Max.: 10ms		

CONTACT DATA

Load voltage	Load type		Load current	On/Off ratio		Electrical endurance OPS	Contact material	Ambient temp.
			1A	On s	Off s			
			NO					
13.5VDC	Resistive	Make	40	0.5	4.5	1×10 ⁵	AgSnO ₂	See Ambient Temp. Curve
		Break	40					
	Inductive L=0.5mH	Make	60	0.5	4.5	1×10 ⁵	AgSnO ₂	
		Break	35					
	Lamp	Make	200	0.5	4.5	1×10 ⁵	AgSnO ₂	
		Break	20					



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED


2015 Rev. 1.00

COIL DATA

at 23°C

Nominal voltage VDC	Set voltage ¹⁾ VDC max.	Reset voltage ¹⁾ VDC max.	Set coil resistance (Between pin 1 & 6) $\times(1\pm10\%) \Omega$	Reset coil resistance (Between pin 2 & 6) $\times(1\pm10\%) \Omega$	Max. allowable overdrive voltage ²⁾ VDC
12	6.9	6.9	20	19	18

1) The impulse width should be 10ms to 100ms. Energizing voltage mode should be acted as per the diagram below.



Polarity for set/reset	Set	Reset
energization	Pin1(-), pin6(+)	Pin2(-), pin6(+)

2) Max. allowable overdrive voltage is stated with no load applied and minimum coil resistance. Max. allowed inflection time is 1s.

ORDERING INFORMATION

Type		HFKT-L /	12	-H	S	T	(XXX)
		HFKT-L: Latching(sealed) HFKT-LT: Latching, Reflow soldering version ¹⁾					
Coil voltage		12: 12VDC					
Contact arrangement		H: 1 Form A					
Construction		S: Plastic sealed ²⁾ Nil: Flux proofed (Reflow soldering version)					
Contact Material		T: AgSnO ₂					
Special code³⁾		XXX: Customer special requirement		Nil: Standard			

Notes: 1) The structure of HFKT-LT is only flux proof, the open vent hole is on the top of the relay;



2) If washing or surface treatment is required after the relay is assembled on PCB, please provide with the conditions in details for our confirmation or our recommendation with suitable products.

3) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm



Outline Dimensions



Remark: * The additional tin top is max. 1mm.


Unit: mm

Wiring Diagram(Bottom view)

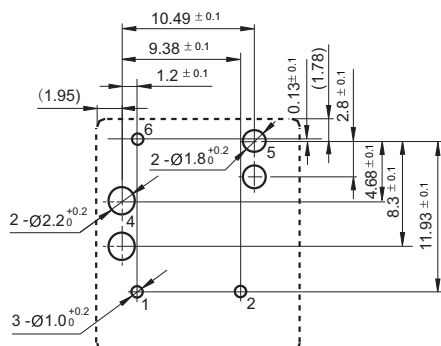

Ambient temperature curve of the electrical endurance test

Ambient temp. curve (one cycle)

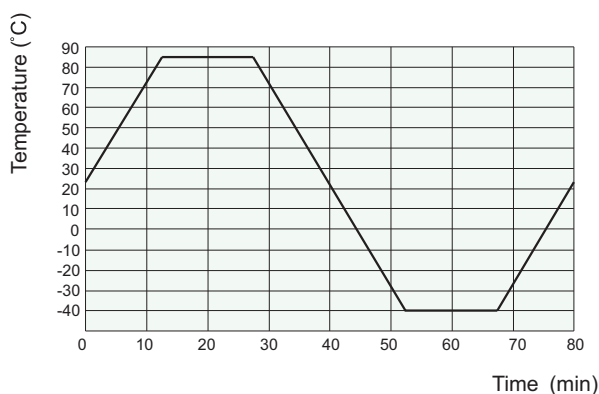

- 1) The minimum temperature is -40°C .
- 2) The maximum temperature is 85°C .

Notice

- 1) Relay is on the "reset" status when being released from stock, with the consideration of shock risen from transit and relay mounting, it should be changed to "set" status when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
- 2) In order to maintain "set" or "reset" status, energized voltage to coil should reach the rated voltage, impulse width should be 10ms to 100ms. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
- 3) To avoid using relays under strong magnetic field which will change the parameters of relays such as pick-up voltage and drop-out voltage.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. In case there is specific criterion (such as mission profile, technical specification, PPAP etc.) checked and agreed by and between customer and Hongfa, this specific criterion should be taken as standard regarding any requirement on Hongfa product.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.